

International specialized media for agricultural mechanization in Asian developing countries.


AMA

AGRICULTURAL MECHANIZATION IN ASIA


VOL. IX, NO. 3, SUMMER 1978

FARM MACHINERY INDUSTRIAL RESEARCH CORP.


Pleasant Working with

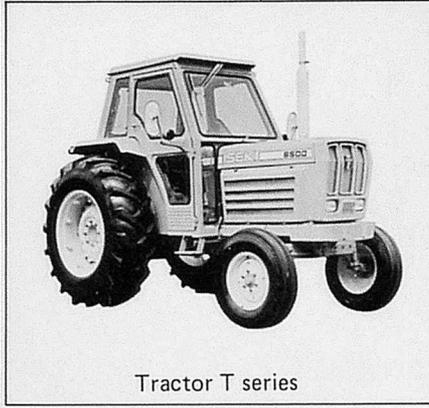


Tractor T series

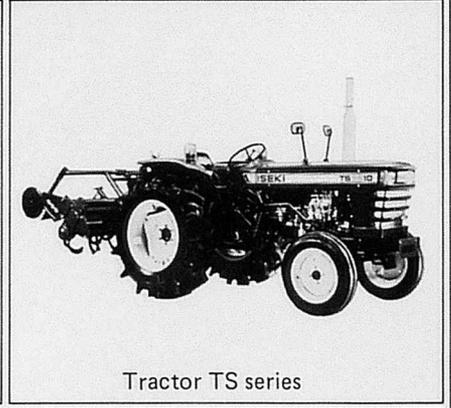


Tractor TS series

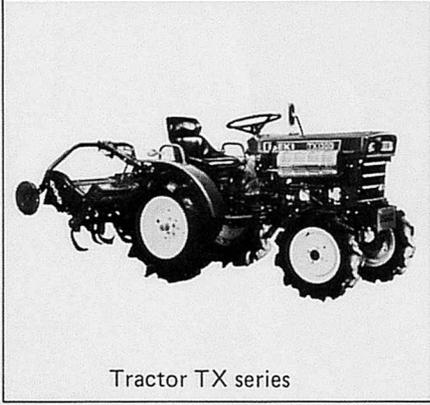


Tractor TX series

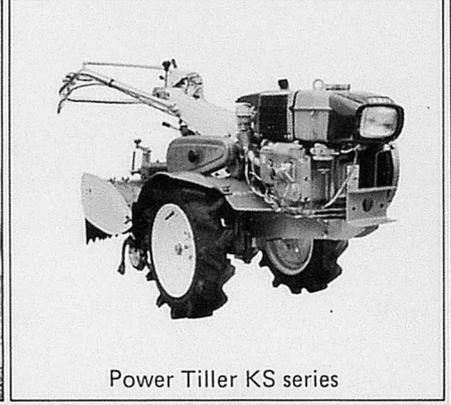


Power Tiller KS series

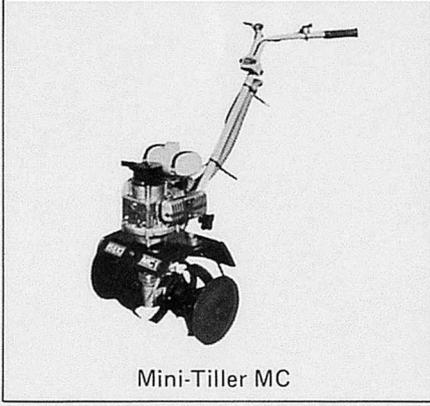


Mini-Tiller MC

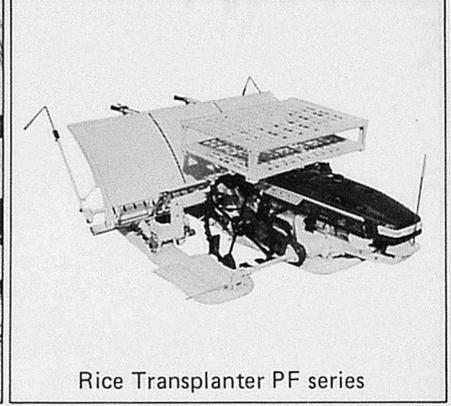


Rice Transplanter PF series

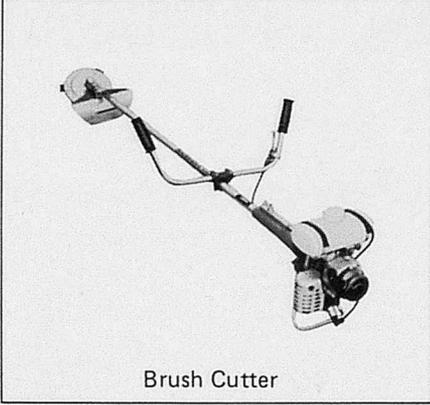

Brush Cutter

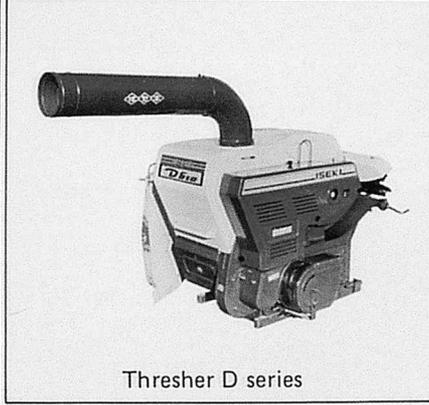


Thresher D series

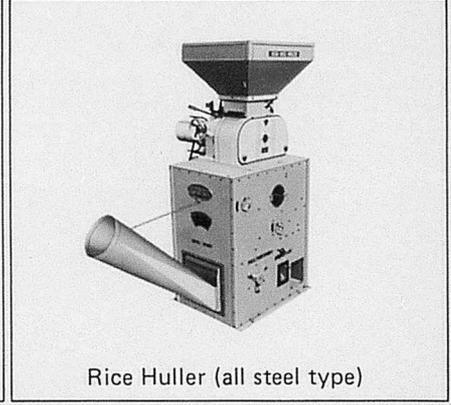

Rice Huller (all steel type)


Iseki Products

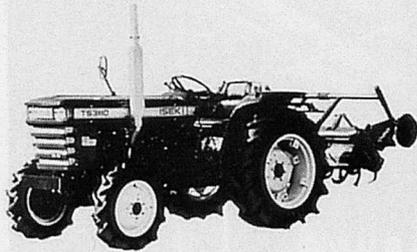

Tractor TS series



Tractor TX series

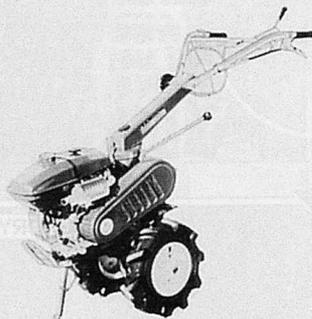


Power Tiller KC series



Compact Tiller AC series




Combine Harvester HD series

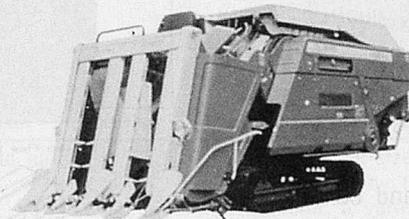

Reaper Binder RX series



Rice Polisher




ISEKI

ISEKI & CO., LTD.


Overseas Administrative Division
 3, Kioi-cho, Chiyoda-ku, Tokyo, 102 Japan
 Cable Address: ISEKIRICE TOKYO
 Telex: 232-2752, 232-2753
 Phone: (03) 265-9301 ~ 9310/9359

KANEKO'S DRYERS LINEUP LETS

KANEKO "F-D-A" System Drying/Storing/Hulling Plant

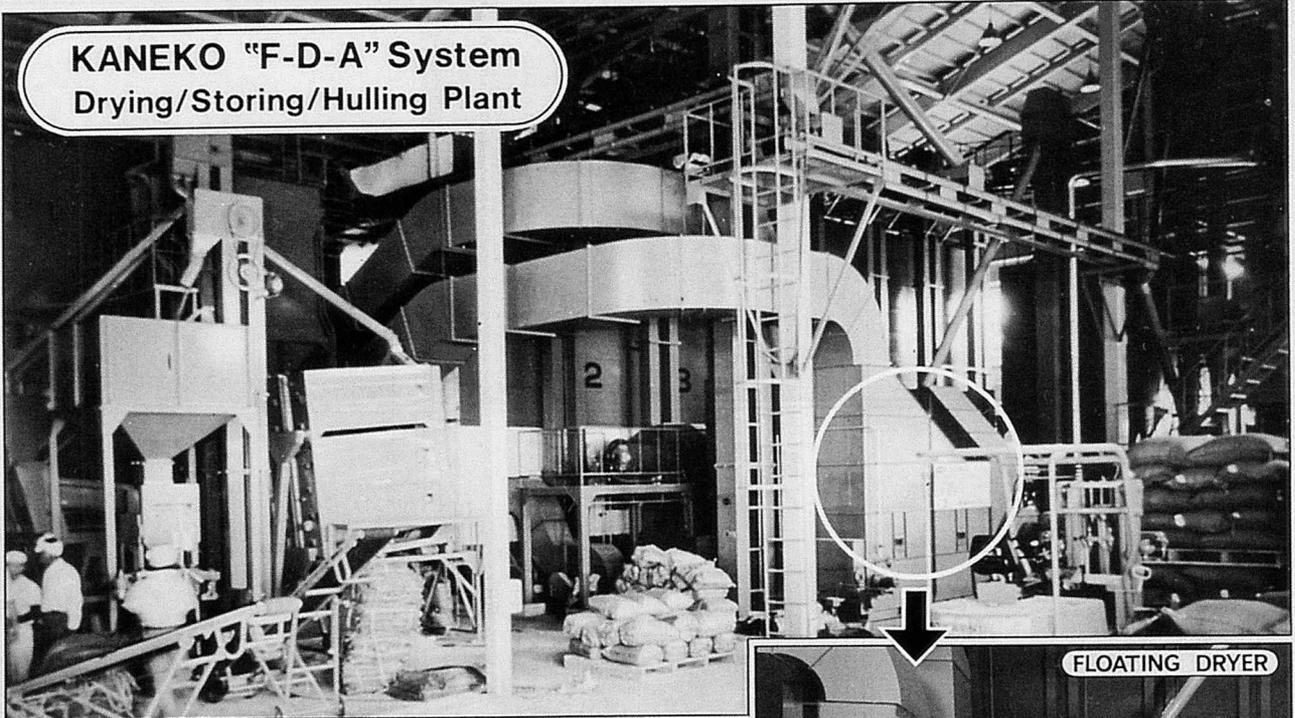

FLOATING DRYER

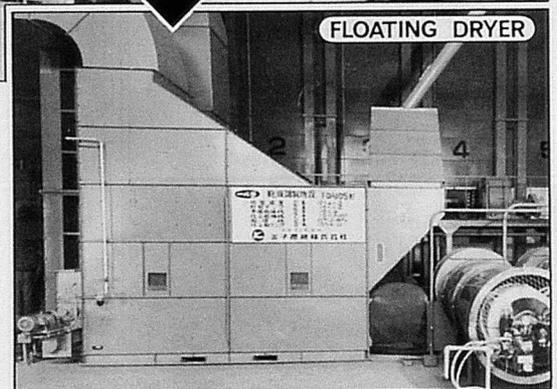

New "F-D-A" system characterized by the FLOATING Dryer, a pre-drying machine, dries paddy and corn of high moisture contents quickly, in large amount, with good quality, and, even more, at low cost.


Firstly, large amount of raw paddy and corn is rapidly pre-dried in succession by means of the FLOATING Dryer.

Secondly, large amount of paddy and corn pre-dried by the FLOATING Dryer is given the last finish drying in the large-scale finishing dryer.

Thus, drying is completed easily and effectively in the "F-D-A" system with the KANEKO originated two-tier drying process employed.

*The FLOATING Dryer, both stationary and movable models available now, works efficiently by itself to dry paddy and corn. Movable one can do work at many places on purpose.

1) Grain Flow Control Tank 2) Discharge Belt-conveyor

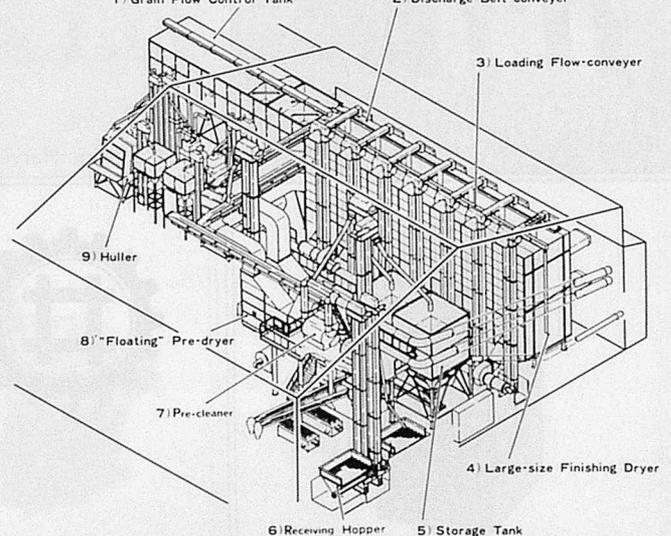

YOU HAVE GOT MORE RUNS IN!

"Supering" Circulating Suction Type Grain Dryer

The circulating type dryer capable of drying raw paddy immediately after harvested by combine harvester.



* Model SP-90A


0.4—0.9t.



* Model SH-285SR

Grain Holding Capacity — Paddy

0.8t—2.8t.

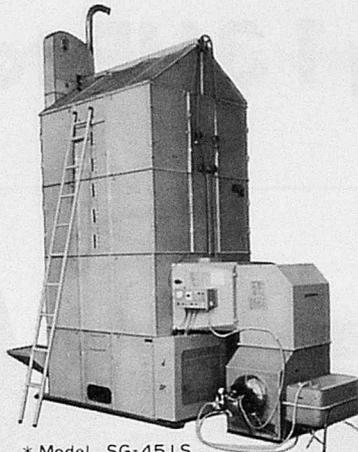


* Model SG-451S

1.5—4.5t.


10 Models from 0.9 to 4.5t. Grain Holding Capacity/Paddy

Full-automatic First Developed by Kaneko all over the World, Super-Auto.

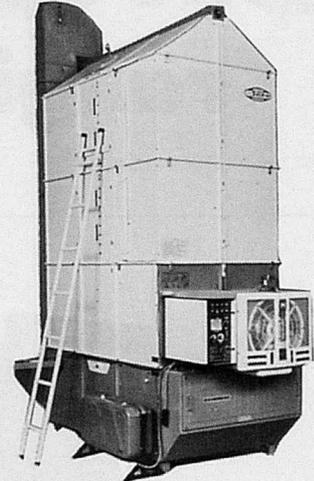


2 Models — 2.8t. and 3.3t.

Grain Holding Capacity/Paddy.

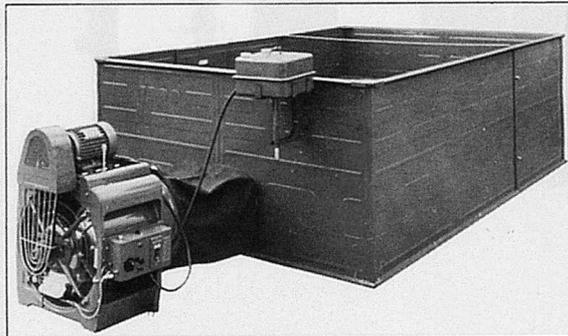

Flat Type Ventilation Grain Dryer-Model HD Series

Anyone can operate easily in complete safety. Compactly constructed.

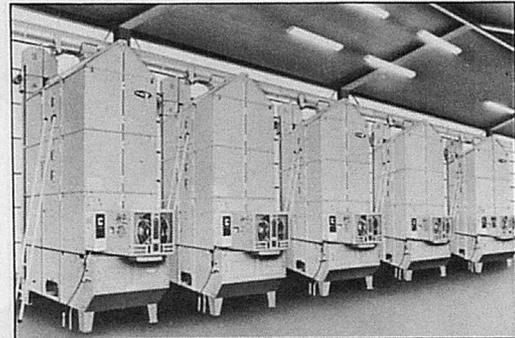

RICECON System—Rice Conditioning System

is small-size grain drying and conditioning facilities marked by the separate operation of each dryer and a variety of application.

KANEKO, with sixty years of experience to its credit, is a leading manufacturer of a wide variety of drying machines and related equipment and facilities.

Whether the climate is hot or cold, arid or with plenty of rain, whether the land is at high or low attitude, KANEKO farm products, with their applications of new scientific theories, guarantee the optimum in efficiency and work rationalization wherever used.



Sell the Post-harvest System.

KANEKO AGRICULTURAL MACHINERY CO., LTD.

Overseas Division


9-12, Asakusabashi 1-chome, Taito-ku, Tokyo 111 Japan
Phone: (03)862-2459 Cable: AGRIKANeko Tokyo
Telex: 0265-7165

Headoffice

21-10, Nishi 2-chome, Hanyu, Saitama 348 Japan
Phone: (0485)61-2111 Telex: 2942-462

Catalogue available upon request.

The quality tractor Series ranging 13HP to 40HP

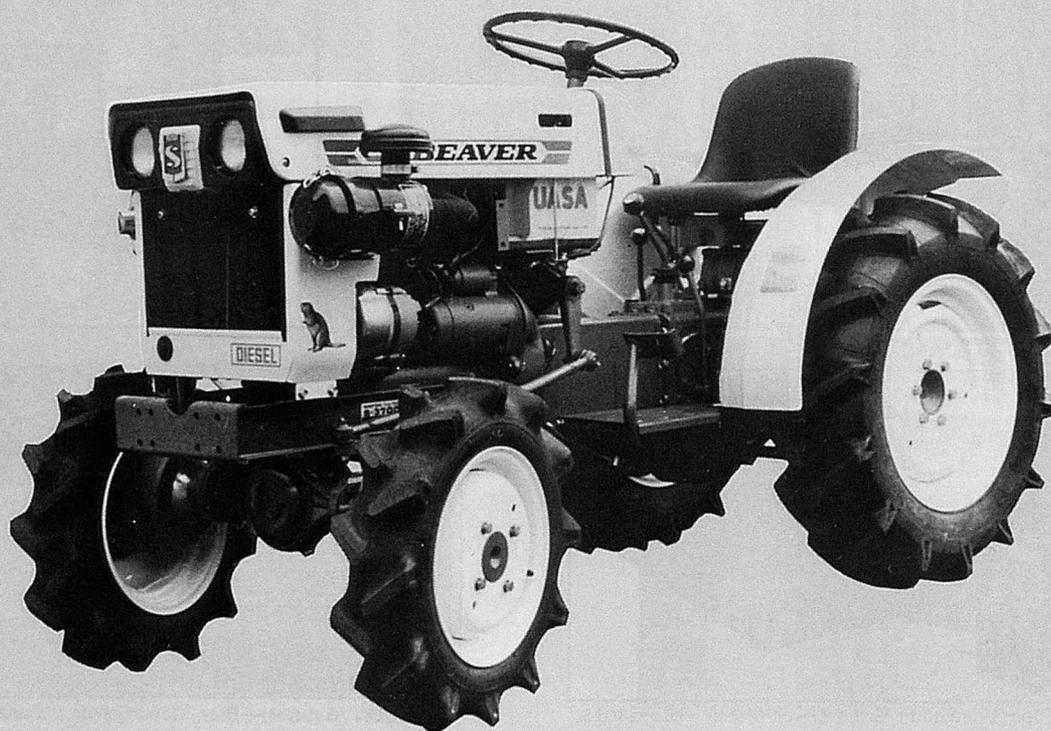

SATOH

SATOH AGRICULTURAL MACHINE MFG. CO., LTD.

Kanda Mitsubishi Building, 6-3, 3-chome Kanda Kaji-cho, Chiyoda-ku, Tokyo, Japan
Tel.: (03) 258-1927 Telex: TOK 222-2567 Cable: "SATOZOKI" TOKYO

International specialized media for agricultural mechanization in Asian developing countries.

AMA

AGRICULTURAL MECHANIZATION IN ASIA

VOL. IX, NO. 3, SUMMER 1978

Edited by

YOSHISUKE KISHIDA

Published quarterly by

The Farm Machinery Industrial Research Corp.

in cooperation with

The Shin-Norinsha Co., Ltd.

and

The International Farm Mechanization Research Service

TOKYO

Yoshisuke Kishida, Publisher & Chief Editor
Yoshikuni Kishida, Advisory Director
Morio Kamijo, Advisor

Contributing Editors and Cooperators

Abdoun, Abdien Hassan (Sudan)
Bala, Bilash Kanti (Bangladesh)
Bedri, Mohamed A. (Sudan)
Chancellor, William J. (U. S. A.)
Choudhury, Md. Shahansha ud-Din (Bangladesh)
Chung, Chang Joo (Rep. of Korea)
Esmay, Merle L. (U. S. A.)
Gurung, Manbahadur (Bhutan)
Hanna, George B. (Bgypt)
Ilyas, Mohammad (Pakistan)
Khe, Chau Van (R. Vietnam)
Lee, Chul Choo (Philippines)
Kilgour, John (U. K.)
Michael, A. M. (India)
Moens, Adrian (Netherlands)
Mughal, A. A. (Pakistan)
Pedersen, T. Touggaard (Denmark)
Pellizzi Giuseppe (Italy)
Peng, Tien-song, (Taiwan)
Sakai, Jun (Japan)
Shrestha, Bala Krishna (Nepal)
Soepardjo, Siswadhi (Indonesia)
Venturina, Ricardo P. (Phillippines)

EDITORIAL STAFF

(Tel. 03/291-5717)
Yoshisuke Kishida, Chief Editor
Kensuke Sakurai, Managing Editor
Noriyuki Muramatsu, Assistant Editor
Kichinori Kon, Assistant Editor

ADVERTISING

(Tel. 03/291-3672)
Shuji Kobayashi, Manager (Head Office)
Hiroshi Yamamoto, Manager (Branch Office)
Advertising Rate : 250 thousand yen per a page

CIRCULATION

(Tel. 03/291-5718)
Soichiro Fukutomi, Manager
Editorial, Advertising and Circulation Headquarters,
7,2-chome, Kanda Nishikicho, Chiyoda-ku, Tokyo, 101 Japan

Copyright © 1978 by
FARM MACHINERY INDUSTRIAL RESEARCH CORP.
SHIN-NORIN Building
7,2-chome, Kanda Nishikicho, Chiyoda-ku, Tokyo, 101 Japan
Printed in Japan

This is the 20th issue since the issue, Spring of 1971.

Preface

The Special International Conference on "AGRICULTURAL TECHNOLOGY FOR DEVELOPING NATIONS : Farm Mechanization Alternatives for 1-10 Hectare Farms" was held in the University of Illinois in U.S.A. from May 23 to 24. There attended over 300 specialists in various fields including farm machinery industry, and, despite of such a short term as only two days, many problems of very wide range were discussed during the meeting.

One of the most remarkable point of this conference is that such a great conference on the problem of small-sized farm machinery was held in the U.S.A. where they had developed the large-sized farm mechaization by now, and another is that Deere & Company took part as one of the co-sponsors of this conference.

Almost all farms of the world are small farms. In this sense, the problem of farm mechanization for the small farms is the greatest one in the world.

However, because of the lack of purchasing power, such mechanization has made very slow progress, and so the big manufacturers of farm machinery in advanced countries have hardly took interest in this problem by now.

But at this conference we found that these manufacturers of large-sized farm machinery in advanced countries began to show their constructive manner to wrestle with this problem in earnest. This is a very good news, because it will be a great power to develop the farm mechanization in developing countries of the world for the future.

And besides, they debated also on energy which is the very current problem. I am sure that all the people concerned must recognize again that there are still more difficulties in farm mechanization in developing countries concerning the energy problem, such as the possibility of use of the fossil energy in the future in developing countries, the problem of the alternative energy in case of the drain of the fossil energy, etc.

In order to develop the farm mechanization in developing countries in considering together these problems, I will like to keep much more active communication among the specialists of the world through "AMA" for the future.

I sincerely hope the cooperation of all the readers of "AMA"

Chief Editor
Yoshisuke Kishida

July, 1978
Tokyo

CONTENTS

AGRICULTURAL MECHANIZATION IN ASIA

Vol. IX, No. 3, Summer, 1978

Yoshisuke Kishida	9	Preface
Merle L. Esmay	11	Intermediate Agricultural Mechanization in East Asian Countries
Bilash Kanti Bala	19	Farm Size, Labor Employment and Farm Mechanization in Bangladesh
A. H. M. Sakhawat Hussain		
Raymond Crotty	24	Economies and Diseconomies of Scale in Malaysian Agriculture
A. G. Rijk	33	Guidelines for Agricultural Mechanization in Northern Thailand
Ungthip Chinapant	39	Demand for and Marketing of Domestically Produced Small Farm Tractors in Thailand
Noboru Kawamura	46	Japanese Small Tractor
Md. Daulat Hussain	55	Performance Studies of Country Ploughs in Bangladesh
Md. Rafiqul Islam Sarker		
A. P. Sharma	61	Design and Development of a Paddy Winnower
N. C. Shrivastava	63	Development of a Single-Row Safflower Harvester
F. B. Dyck		
Harry van Ruiten	66	A Description of the Intergrated Rice-Processing Complex of the Kamol Kij Company, Ltd. in Thailand
A. K. Goyal	69	Process Development and Testing of Ceramic Materials from Rice Husk-Ash
R. C. Maheshwari		
H. S. Maiti		
M. A. Mazed	73	Introduction of Decortication of Green Jute Plants in Bangladesh and Its Prospect
M. S. Rahman		
B. N. Lohani	75	Statistical Modelling of Tapioca Drying in Thailand
N. C. Thanh		
R. T. Lewis	81	Engineering for Food Production in Developing Countries — Are Small Tractors Appropriate?
<hr/>		
New Products	90	
New Publications	92	



Index to Advertisers38
Back Issues96

Co-operating Editors.....87

Intermediate Agricultural Mechanization in East Asian Countries



by

Merle L. Esmay

Professor of Agricultural Engineering
Michigan State University
East Lansing, Michigan 48824, USA

The following observations and impressions are presented as a part of the survey of agricultural mechanization for semi-arid tropical crops undertaken for ICRISAT (International Crop Research Institute for Semi-Arid Tropics) in the countries of Japan, South Korea, Taiwan, Indonesia and the Philippines in October and November, 1977. The five-country study is a part of the worldwide survey undertaken by Mr. Gerald Thierstein of ICRISAT. The objective is to bring together information on locally manufactured and utilized machinery as well as those being developed in various countries of the world. The focus was on agricultural machinery applicable to rain-fed agriculture and appropriate for small farms in the range of 10 hectares and less. Major emphasis was placed on animal and small mechanical power equipment for tillage, planting, seeding, fertilizer application and harvesting.

The five East Asian countries included in this portion of the overall survey have wetland paddy rice as the major crop. Because of this some of the machinery development was not directly applicable to dry land crops. Much of the equipment for tillage, plant protection, harvesting and post harvesting processes

was, however, also applicable to upland crops as well as wetland paddy. A few specific rice crop machines such as the mechanical rice transplanter was not included in this survey. Small two-wheeled power tillers and walking tractors can, however, be equipped with paddy wheels for wetland mobility or with regular wheels with tires for dry land cultivation.

The five countries surveyed were in various stages of mechanization development for agricultural production. In Japan, for instance, agricultural mechanization is now designed mainly for labor efficiency. Some such equipment was then inappropriate for the focus of this survey towards small farms in the semi-arid tropics of the world. Selective impressions for each country are summarized briefly in this report. The five countries are reported in the order they were surveyed.

Japan

Agricultural mechanization in Japan has progressed to a high level of sophistication. The mechanical horsepower available per hectare of cropland is the highest in the world at about four (Giles, 1975). This high level of

mechanization is, however, utilized on small farms that average slightly above one hectare. Even though the various machines are quite labor efficient in themselves, the labor input per hectare of cultivatable land in Japan is comparatively high: about 800 hr per ha for rice. At the same time, the mechanized agriculture payoff has been exceptionally high: average rice yields at five tons per hectare (Sakai, 1977). High yields have not been necessarily brought about by mechanization, but rather by the combination of mechanization along with other inputs of water control, high yielding varieties, plant protection, fertilizer application and good cultural practices. The high governmental subsidization of a guaranteed rice price to the farmers at a level two to three times the world market price has been successful in stimulating increasingly higher total production levels of rice each year (it was about one U. S. dollar per kg of brown rice in 1976). The success of subsidization not only made the farmers fairly prosperous, but stimulated rice production beyond the point of self-sufficiency for the country since some years ago. Japan was then confronted with decelerating the production of rice and diversification to other crops. They are still working on

this program.

Japan mechanized agriculture through the 1950's and 60's with the two-wheeled power tiller and walking type tractor. Power tillers in the 10-horsepower range were first introduced. The introduction of smaller power tillers in the four, five and six horsepower ranges came later as they were more applicable to the individual farmers. The smaller power tillers made it possible for the majority of farmers to own their own mechanical power unit for primary tillage (about five million farmers owned 3.4 million power tillers in 1974). The policy of providing mechanization appropriate, feasible and economically suitable for small farmers was also responsible for the introduction of tens of thousands of stationary threshers and small, simple, box-type grain dryers (3.3 million power threshers in 1967 and 1.74 million grain dryers in 1975).

Today a vast majority of all the rice produced in Japan is transplanted with mechanical rice transplanters and harvested with small, self-propelled combines and dried mechanically under controlled conditions. (In 1976 there were one million transplanters and nearly two million combines on farms.) The introduction of the two-wheeled tractors peaked first in 1962 at about 500,000 units per year and again in 1968 at the same level (Sakai, 1977). Now four-wheel tractors are being manufactured and introduced at about 300,000 units per year. The four-wheeled tractors run in the range of 15 to 35 horsepower and 80 percent is delivered with the rotary tiller. Consequently, much of the manufacturing in Japan and all of the research and development in agricultural machinery is focused towards four-wheeled mechanical powered equipment. For example, the agricultural machinery research station at Ohmiya, near Tokyo, is concerned mainly with

the development of bean and rape seed harvesters, along with fruit harvesting and handling equipment. These specialty machines are all adaptable to four-wheeled power units and designed for labor efficiency with little concern for the initial high capital cost.

The Agricultural Machinery Research Station library at Ohmiya was undertaking the annual accumulation of all manufacturers technical and sales bulletins for agricultural equipment produced in all countries. The program has been underway since two of years ago and thousands of folders and brochures have been accumulated from companies around the world. The library now has on file of essentially all the Japanese manufactured equipment specifications and is contacting other manufacturing companies in other countries. The aim is to obtain catalogs and leaflets that provide technical specifications for equipment along with prices. The procedure is for information to be obtained first from larger companies around the world that generally produce equally large equipment. Obtaining side information from small companies that produce appropriate mechanization for small farms will be more difficult and time consuming. Therefore, it is important for the ICRIASAT to develop a linkage with the director of the Research Station library in order to complement the survey of intermediate technology for semi-arid topical cropland.

A number of individual agricultural machinery companies in Japan were visited. The Mametora Company was, for example, manufacturing and exporting the power transmission assembly for small power tillers in the 6- and 7-hp range. They have set up technical assistance programs with a few companies in other Asian countries which are capable of manufacturing most of the

framework for a power tiller, but not the gears necessary for the transmission assembly. This approach can benefit some other Asian countries for a few years. The Otake Company is still emphasizing the manufacture of small threshers, forage cutters, weeders and cultivators. The smallest cultivator is a modification of one originally designed at the International Rice Research Institute (IRRI). It is powered by a very small 3-hp engine and is adaptable to upland cultivation. The Takakita Company is innovative in developing different kinds of equipment, particularly pertaining to livestock production such as equipment for forage cutting and handling, and animal waste disposal. Originally the company was a plow manufacturer and still continues to manufacture plow and cultivator equipment for two-wheel as well as, now, four-wheel power units.



Fig.1 At the Takakita, Agricultural Machinery Company in Japan. President Takakita right, Professor Merle Esmay, in center, and Dr. Makoto Hoki left.

The Sukigara Company also manufactures very small mechanically powered cultivation equipment. The small machines range from a 1 to 1.5hp mono-

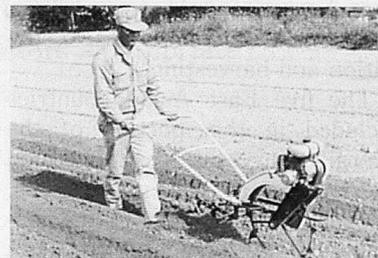


Fig.2 This is a small 1-1/2 hp mono-wheel cultivator produced by the Sukigara Company of Japan. It is low cost and should have application in small upland fields.

wheel cultivator to 5-8 hp two-wheeled units. The Sukigara Company still shows a hand, push-type cultivator in their brochures even as they have not manufactured many in the last few years, they would manufacture large number when orders are received.

All of the agricultural machinery companies visited emphasized interest in export markets and were willing to make various arrangements of joint technical programs with companies in other countries. The export prices for agricultural equipment are considerably below domestic prices. Domestic list prices were readily available, but export prices were difficult to obtain as they vary with time, place and conditions.

South Korea

Power units for agricultural mechanization in South Korea have been focused mainly towards the 10-12-hp tillers in the past 10 years. The quasi-government Dae Dong Manufacturing Company is by far the largest agricultural machinery company and manufactures some 80 percent of the locally-made power tillers in the country. The company started over 10 years ago with a joint venture technical assistance program with Mitsubishi of Japan. However, Dae Dong is now operating independent of Mitsubishi, the parent company. I talked to various officials of the Dae Dong Company and other Koreans in government and university in 1971 and 1972, while working with the Exotech team study of agricultural mechanization, about manufacturing smaller power tiller that would be less expensive, more maneuverable in small fields and that small farmers could more readily afford. In 1977, there was no evidence of the manufacture of smaller

power tillers. The Dae Dong Company did show a lower horsepower unit on one sales leaflet, but when questioned about it said were not producing any. The Agricultural Machinery Research Station at Seuwon did indicate however that they were giving some attention to the development of a smaller power tiller, and had a prototype of the IRRI designed unit in their shop for evaluation and modification for Korean conditions. There was some evidence at the developmental planning level that possibly there was a place for the smaller power tillers for the small farmers. There seems to be a compulsion for modifying the IRRI unit even though it was engineered, designed and tested in the Philippines for wet paddy and dry land conditions. It is somewhat questionable whether modifications add or detract from the capability and quality of the original unit. While some countries have special conditions and requirements for machinery and qualified engineers for redesigning, the original design need not necessarily be modified for each country.

The Korean Agricultural Machinery Research Station was also working on an attachment-type reaper for rice: another type of machine that I advocated in 1971 and 1972. I did not, however, find evidence of any Japanese company that had manufactured one in the past before going to binders and combines. An attachment-type reaper for a power tiller would be considerably less expensive than the self-propelled units now being manufactured by the Japanese companies as it would only reap and lay the stalk paddy down in uniform, unbound bunches. This step would adapt well to threshing in the field with a portable drum-type unit. The reaper would adapt well to the Taiwan system where the small bunches, cut by hand sickle, are picked up by

hand and carried a few steps to the portable drum-type thresher. The Korean Research Station had a prototype model of the experimental unit that still needed some further development, but had possibilities. However, officials said they were giving up on its development because it was too late. It did not fit into the pattern of combine harvesting which is being promoted and considered by the planners. Some combines for custom operators may be in order, but it seems that there still is an interim period of a number of years before combines can totally take over or should totally take over with their high capital investment requirements. In general, there seemed to be little concern for the small one-hectare farms which is typical for Korea. The larger machinery companies, such as Dae Dong, were not interested in producing small equipment; and ironically even the small, somewhat primitive shops (of which I visited a couple) were also not satisfied to produce small equipment for the average sized farmer. One small shop in the edge of Seoul was making some small hay crushers for small livestock farmers, but was obsessed with development of sophisticated dryers and hay pelleters. The shopowner had plans for the IRRI dryer and had made a few, but was instead producing a few much more sophisticated upright circulating grain-type dryers with sophisticated controls. The pelleting was even a more expensive and, of course, power requiring type of machine which he was attempting to develop from scratch.

One of the most interesting small shops visited was producing simple, low-cost, drum-type threshers. The threshing units were made of plywood over a wood frame for housing the engine powered cylinder. The operator produced two different sizes of threshers. One, he said,

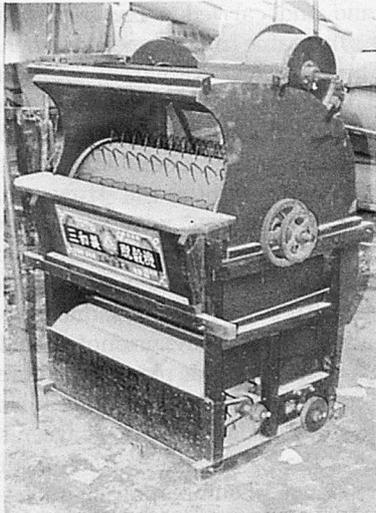


Fig.3 A small low-cost drum-type thresher still being developed by a Korean small shop for sale to individual farmers.



Fig.4 A custom operator threshing crew at work in South Korea. The larger machines can only be purchased and operated by custom operators.

was for the individual farmer and the other, a bit larger, was for custom operators. He was indeed providing a service for the small farmers and small custom operators in producing threshing machines that had good capacity, but were still not overly expensive. The units were light enough to be portable so they could be moved around in the field. The units were not, however, moved continually behind the harvesting operation as the Taiwanese do. This shop manager was also building some rice-straw-twine making machines that were foot pedal operated, and some rice-straw-twine bag making machines. The bag making machines were powered by a small engine. These machines were being used by some farmers of custom work during off seasons as an addi-

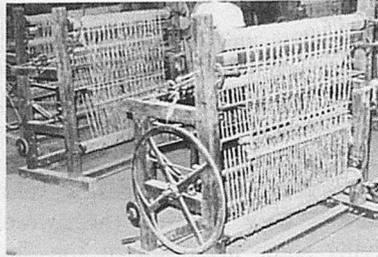


Fig. 5 These are looms for making rice straw bags. A small Korean shop makes them and sells to farmers for off-season enterprises.

tional source of income.

The Korean agricultural machinery manufacturing companies belong to an agricultural machinery association which controlled and coordinated production and marketing of the various agricultural machines through the farmers' associations.

All of the agricultural machinery manufacturing companies except the smallest shops were very actively interested in exporting machinery. Each of the larger companies visited had beautiful multi-color leaflets in English that had been put together for publicity and promotion. Exportation is a national policy that is being extended to the agricultural machinery industry even though it is quite new in Korea. A few companies were already exporting some products and others were negotiating with companies in other countries to set up joint ventures. I had previously heard of some concern by various Japanese manufacturing companies about the Korean companies moving into the export business with essentially Japanese designed equipment and, of course, providing considerable competition. Many of the Korean companies have initially obtained basic designs and technical know-how from Japanese companies and can now possibly produce low-cost machines because of lower labor costs and sell them on the international market at a lower price than the Japanese.

Taiwan

In 1962, when I first became acquainted with Taiwan, their economy might be described as depending upon the four B's, Bicycles, Buffalo, Bamboo and Babies — Bicycles for transportation, Buffalo for tillage and hauling, Bamboo for most everything, and Babies for population growth. By 1977, Taiwan had changed greatly and seemed to be dependent upon the four M's, Motor bikes, Mechanization, Migration and Matriculation — Motor bikes for transportation, Mechanization for agriculture, Migration of rural youth to the cities, and Matriculation for education.

This possibly over simplifies the changes in Taiwan, but does reflect to some extent the transition that has taken place in the past 15 years. From a transportation standpoint, there are many other vehicles now, including cargo trucks, pickups, and panel wagons; but motor bikes seem to dominate the roads, particularly in the rural areas. Mechanically powered machines are rapidly replacing the water buffalo in agricultural production, although there are still many draft animals (417,000 draft animals in 1960 and 188,000 in 1976; 3,700 power tillers in 1960 and 56,000 in 1976) (Pang, 1978). Migration to the cities, particularly by the rural youth, is a predominant trend. The industrial development in Taiwan has provided job opportunities and the migration has brought about labor shortages in agriculture, which is now forcing labor efficient mechanization. Bamboo is still used as a versatile material and you still see bamboo scaffolding many stories high on all sides of some new construction of multi-story structures, but its use has tapered off somewhat in the last 15 years. As for babies and the population, there has been some concern about population growth, and its growth has been curtailed some-

what. Insofar as education is concerned, the Chinese have always been interested, but now with a better financial means, for most families in both urban and rural areas, Education is taking on a new dimension at both the middle school and the higher educational level.

The shortage of rural labor is beginning to take some toll insofar as agricultural production is concerned. The multi-cropping index for Taiwan, for example, has dropped from a high of 185 in 1965 to 175 in 1976, which may, in part, be a reflection of the lack of labor to follow up with sequential crops. Intercropping is also diminishing because of labor shortage and the necessity to mechanize. Taiwan agriculture has had one of the lowest total power inputs per ha (about 1/4 hp per ha in 1965 and still less than 1/2 hp) with one of the higher production levels per hectare (about 3.5 tons per ha). On the power versus production graph developed by G. W. Giles (1975) for various countries of the world, Taiwan is an exception because it had attained the highest production with the lowest power input. The power includes hand, animal and mechanical power, and the level of production of 3.5 tons per ha was aggregate for all crops. The power/production index for most



Fig.6 The combine assembly line of a new Taiwan company just beginning production of these Japanese-type combines. The expensive combines run by custom operators is a change being resorted to in Taiwan to overcome the labor shortage in the rural areas. They represent a drastic change from the individual farmer-owned drum threshers which have been operated by farm families for the last decade or two.

other countries fell quite neatly onto either one of two straight lines. Taiwan successfully developed a very intensive, mostly irrigated agriculture.

Shortages of labor that have developed in the past five years have caused the development of mechanization for the purpose of labor efficiency. I was surprised to see a number of Japanese-type combines in the harvest fields as I rode a train through one of the harvest areas in Southern Taiwan. The jump to combines from the portable drum-type thresher, which most farmers owned and operated themselves, was a great change. (In 1965 there were 205,784 threshers in Taiwan — mostly the foot pedal drum type. By 1976 threshers had dropped to 128,232 and combines increased to 2,811.) (Peng, 1978). Not only was it a change from the standpoint of mechanization, but also in that the combine is generally custom operated while harvesting before had been a family operation.

The mechanization of harvesting with expensive machines that are custom-owned and operated is one way to approach mechanization and has some merit, particularly for the harvesting operation. I was surprised, however, to find that the Taiwan manufacturers of power tillers were only making the large ones that run from 10 to 19 horsepower in size. These large power tillers can be purchased and operated only by custom operators. In 1976 there were 55,748 power tillers for 870,000 farms that average about

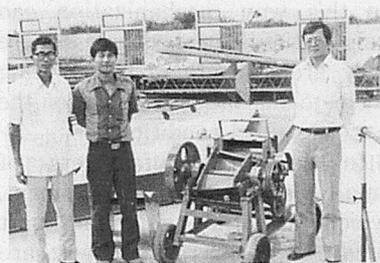


Fig.7 This is a small forage cutter produced by the Chung-Yuan Company in Taiwan. Mr. C. D. Cheng, in dark shirt, is the manager.

one ha each. This is one for each 15.6 farms as compared to Japan's peak of one for each one and one-half farms. (Peng, 1978) It would appear then that the government policy is not only to make small farmers dependent upon custom operators for combining their crop after it is grown, but also for primary tillage in preparing the land. Mechanical rice transplanters are also coming into use, but they are not as large and expensive as combines (6,108 transplanters in 1976).

Some of the smaller manufacturers in Taiwan, as those in Korea, seemed not to be content with developing and manufacturing small machines of the type that might be purchased and operated by individual farmers. For example, two manufacturers that were making rice dryers were visited ; however, not the small, simple, flat-bed dryer, but rather the more expensive, complex, upright, circulating-grain type. The Tatelin Company, somewhat like the Dae Dong Company in Korea, was manufacturing power tillers of a Japanese company design. This Taiwan company, located in Kaohsiung, has a tremendous manufacturing capacity that officials said would be adequate to produce at least 7,000 power tillers a year, which is the total number now being marketed annually in Taiwan. I believe that with a little effort, output could probably be pushed to 10,000 units. Tatelin, however, was only producing 2,000 units per year, as there are other companies in the business of helping supply the 7,000 units to the Taiwan agricultural sector. The management of the Tatelin Company, as well as some of the others visited, complained of the very limited market for their equipment. The 7,000 power tillers marketed annually was an example. Taiwan is a small country, but the Tatelin Company as well as

others, and including some policy-makers, were totally ignoring the market for 870,000 individual Taiwan farmers. The individual farmers provide a tremendous market for smaller, less expensive equipment. Japan, as opposed to what both Korea and Taiwan are now doing, did manufacture and market equipment for the individual use of farmers of that country (see the Japan portion of this report). Although the early manufacturers of power tillers and walking tractors in Japan started out with the 10- and 12-hp units, they soon changed to the smaller ones of the 5-hp range which the small farmers could and did buy throughout the country.

The Taiwan agricultural machinery manufacturing companies, as those in Korea, are all looking outward for export markets and, in a number of cases, are exporting a good deal of equipment. One exception to the trend of large equipment has been the manufacture and marketing of small, hand-type sprayers for plant protection. These have been manufactured by Taiwan companies by the tens of thousands and sold domestically, and now a number of companies are manufacturing them for export. Two or three Taiwan companies visited were exporting then products to Indonesia.

Indonesia

Indonesia is a country of many paradoxes. One can oversimplify and make many quick conflicting judgements such as : there is a high rate of under-employment and unemployment so agricultural mechanization should not be introduced. The country is not self-sufficient in food grain production, thus there is a need of more inputs—possibly mechanical power for primary tillage. Rural people, particularly the young, are flocking to the cities, Jakarta

mainly ; so there is a need for improved rural condition to slow down this movement. Transmigration programs back to the rural areas, particularly onto other islands, may never be able to keep up with the rural-to-city movement. A country that is introducing one-half million motor bikes per year should be thinking about improved mechanization for their basic industry—food production.

Indonesia, needless to say, is just in the beginning phases of agricultural mechanization. In that respect it is an ideal time to plan for the type of mechanization appropriate for the country in the coming decade. In-country research and development as well as local manufacturing should play a critical role in the process. All possible information on appropriate mechanization should be obtained from around the world, and local manufacture developed so as not to be dependent on the importation of machines from any other country on a long term basis.

During three days of travel by automobile, in the rice production areas of west and Central Java I observed just one power tiller being used ; even though it was the beginning of the monsoon period and primary tillage was underway in many fields. Appropriate mechanization can be selected so as not to replace and increase unemployment, but rather increase overall production and improve the living conditions and optimism of the rural people. In this way mechanization can help satisfy rural people where they are at, rather than forcing them to the cities because of the hopeless rural conditions.

Indonesian manufacturers of small agricultural equipment, which are for the most part small companies and shops, are having difficulty getting started and maintaining a viable business. This is true, for example, of manufacturers of back-pack



Fig.8 This is a small labor-intensive shop in Indonesia. Back-pack, hand-operated sprayers were being fabricated for local use. Quality control is a problem for these small shops. They need help for the production of durable products to meet the competition of imports.

sprayers even though thousands are being regularly imported from Taiwan. The small manufacturers have both engineering and marketing problems and will not survive, as they have not in Taiwan, unless help is provided. Production of quality products is difficult for the small shops to achieve. This has been particularly true in the past few years while they were getting started. Some of the locally made products may now be as good as the imports, but unfortunately the farmers are not convinced, hence prefer imports even though more expensive.

All the agricultural equipment manufacturers visited, both large and small, were having marketing problems. They did not seem to have dependable orders even though there may have been a broad general demand for the equipment. Some of the agricultural equipment manufacturers have had to revert to sidelines in order to survive. One in Surabaya, for example, had reverted to truck and trailer steel box fabrication. Another in Yogyakarta was relying on the production of nuts and bolts for continued production income. Introduction, manufacturing and marketing of agricultural equipment is under considerable government control, thus the small shops are dependent upon programmed orders. Some agricultural equipment are manufactured by quasi-government com-

panies. One, in particular, is operated by the military. This company occasionally sub-contracts equipment orders they cannot handle to privately operated shops.

A cooperative organization of manufacturing shops was visited in Central Java. There is some specialization among them. For example, one specializes in foundry work. The cooperative shops are only beginning to go into the production of farm machinery in a small way at this time. One shop was visited which was filling an order for water pumps. This cooperative approach appeared to be effective and practical.

Kubota of Japan has in 1977 put up a local factory near Semarang in cooperation with an Indonesian firm for the manufacture of small diesel engines. They plan to go into power tiller production within another year or two. A similar enterprise by Mitsubishi is planned near Surabaya. Under government regulations 30 percent of the components must be locally produced.

Some IRRI designed equipment (the power tiller in particular) was observed at three to four small shops; however, only a few units had been manufactured. There was little market available to these small manufacturers for such machines. The small manufacturers seemed overly concerned, however, about redesigning the IRRI machines. Granted the machines may not be perfectly designed by IRRI for every location, but it is questionable whether the small shop owners without engineers have the expertise to improve them appreciably.

Philippines

The Philippines have (within a one day driving radius of Manila) a full range of manufacturing capabilities and facilities, from modern sophisticated plants to

small shops with only welders and no power operated equipment. Manufacturing in the Philippines cannot be appreciated without understanding the phenomenon of the "jeepney". Following World War II a number of small entrepreneurs procured army surplus jeeps and remodeled them as small bus-type personnel carriers. The bodies were refabricated to provide a rear entrance with a bench on either side. The capacity of each is from 10 to 20 people. They became available at a time when transportation vehicles were scarce and have flourished ever since, particularly in the Manila area. The jeepney's run regular routes as buses and it costs little to ride them. A part of the phenomenon, and possibly a factor related to their acceptance, has been their extensive decorations and ornamentations. Each is brightly painted with individualized designs.

The small roadside jeepney fabricators provide training, or many skilled people in metal work and engine reconditioning, as repair and maintenance. The army surplus jeeps are long gone, but the innovative fabricators have continued by importing various needed components, mainly engines and power chains. At least one jeepney fabricator is importing used Japanese diesel engines. Most of the jeepneys now being made have diesel engines for fuel economy. The largest jeepney manufacture has gone completely modern and now has a new mechanized and automated assembly plant in which they are fabricating four or five types of vehicles along with the jeepneys. This large company is installing all new Japanese components in all of the vehicles.

A number of the jeepney manufacturers have ventured into the manufacture and fabrication of various types of agricultural equipment. The manufacturing

skills they acquired from the jeepneys help considerably in manufacturing other equipment. The availability of local manufacturers combined with the machine designs available from nearby IRRI have played a significant role in the accelerated introduction of agricultural mechanization. In the Central Luzon area, IRRI designed equipment, particularly power tillers and threshing machines, dominate the agricultural equipment now in use. From the roadside it appeared that at least half of the power tillers in the rice paddy fields were of the IRRI design. It was observed in visiting a number of small agricultural equipment manufacturers that they were fabricating essentially an IRRI design, but had their own patents on them. IRRI patents their newly designed machines, but evidently it is quite easy to obtain another patent on a similar machine by making a few changes. There is natural pride in manufacturing their own identifiable machine; however, one manufacturer answered my question about such patenting by stating that he could with a patent include research and development in his sale price. This, to me, indicates a controlled market through government programs in which free market competitive pricing is not a factor. The manufacturers then must, as was the case in Indonesia, depend on

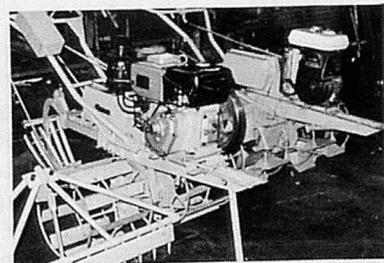


Fig.9 These are two IRRI designed (with some modifications) power tillers manufactured in a small Indonesian shop. There was not, however, a market for them as government programs do not promote them. The small shop has had to resort to truck body fabrication to stay in business.

sporadic government programmed orders to stay in business.

Only the smallest shop visited was fabricating a simple a foot-pedal drum thresher which many individual farmers could afford. The more prevalent IRRI designed threshers being fabricated included the mini-portable one and a trailer mounted axial flow, through-put type. Only custom operators could afford these power threshers. Custom threshing is becoming more popular in some areas. This is in spite of a fairly universal custom of small groups contracting with rice growers to weed, harvest, thresh and clean the paddy rice for a percentage of the crop (six percent in some areas). One custom operator stated that he had labor groups hire him to thresh with his mechanical equipment. According to this custom operator the rice grower also favors mechanical thresher because of reduced losses. The labor groups traditionally thresh by hand beating, which can prolong threshing,

cleaning and drying.

A few hundred flat-bed rice dryers have been introduced around the Philippines through government agricultural programs. These have been mainly the plywood box unit designed by the Institute of Agricultural Engineering and Technology of the University of the Philippines, Los Banos. IRRI has nearly completed the design and development of a new upright fixed-bed dryer. It can be fabricated of low-cost local materials, and in particular does not require the expensive perforated metal floor needed for the horizontal box units. A few small companies are fabricating dryers of their own design, but at least in one case it appeared to be very expensive for just being a fixed bed horizontal type unit. Some of these expensive units were purchased by rice processing plants. The expensive unit did have a rice hull burner attachment for heating the drying air which made it somewhat more attrac-

tive. It was observed at one mill that sun-drying was still practiced even though they had one of these rice hull dryers. The dryer was evidently just for emergencies during wet, cloudy weather when sun-drying is not possible.

REFERENCES

1. Peng, Tien-Song, 1978. "Problems and Solutions : Development of Farm Mechanization in Taiwan", Taiwan Agricultural Machinery Guide, J. C. R. 37, Nanhai Road, Taipei, Taiwan, R. O. C.
2. Sakai, Jun, 1977. "Development Current of Agricultural Machinery for Japanese Rice Cultivation and Farming Structure", Agricultural Mechanization in Asia, Tokyo, Japan, Volume VIII, No.4, Autumn, pp.66-78.
3. Giles, G. W., 1975. "The Reorientation of Agricultural Mechanization, Part I, Policies and Attitudes for Aciton Programs", Agricultural Mechanization in Asia, Tokyo, Japan, Volume VI, No.2, Artumn, 1975, pp.1-16.



Farm Size, Labor Employment and Farm Mechanization in Bangladesh



by
Bilash Kanti Bala **A.H.M. Sakhawat Hussain**
 Associate Professor Lecturer
 Department of Farm Power & Machinery
 Bangladesh Agricultural University
 Mymensingh, Bangladesh

Introduction

Bangladesh is a predominantly agricultural country. Economic development of Bangladesh is largely dependent on its agricultural development and this development must have the objectives of increasing agricultural production and increasing labor utilization. The average size of land holdings is very small. Bangladesh has a surplus labor and its land resource is limited. The distribution pattern of farm sizes in Bangladesh is shown in Table I.

Farm size, labor employment and mechanization have long been a debated issue. Some mechanization experts (A.U. Khan, 1975) believe that mechanization technologies must be developed to meet the requirements of the small farmers in the tropics. The development of mechanization technologies for small farms has been strongly criticized by W. S. Weil. (1976) for the following defects: mechanization technologies of small farm sizes can be helpful for short term, ranging 1-5 years and cannot utilize the potentials of the farmers and the country to the fullest extent. Weil suggests that the living standard of rural population and the economic situation of the country can be

Table 1. Percentage distribution of farms and cultivated area according to size group

Size Group (Acres)	Percentage of farms	Percentage of land cultivated	Ratio
0.01 - 2.49	57	21	0.37
2.50 - 4.99	26	30	1.15
5.00 - 7.49	9	18	2.00
7.50 - 12.49	5	16	3.20
12.50 and above	3	15	3.00

Source: Government of East Pakistan, Ministry of Agriculture, Master Survey of Agriculture, 1968.

improved through: first and foremost, education; gradual and planned changes of traditional farm and village structure; planning and follow up of agricultural production; agricultural processing; organized purchasing and marketing; organized services; creation of additional income sources, etc.

Iftikhar Ahmed (1977) in his paper "Appropriate Rice Production Technology for Bangladesh" suggested that the use of HYV technology in conjunction with bullock can maximize output and employment. He further adds "The use of tractors/power tillers cannot be justified not only on the grounds of displacing labor but also on the grounds of reducing output (or at least not producing any output advantage)". He has also tried to validate his ideas through case studies. The authors fully support the idea of using HYV technology but they do not believe that tractors/power tillers can be blamed for reduction in production as

shown in his case studies. This paper aims i) to find the relationship between farm size and labor employment for different degree of mechanization, ii) to study the role that farm size plays in modernizing agriculture; iii) to find the conditions and situations required for exploiting the potentials of the farmers and the country.

Theoretical Concepts

Meaningful mechanization must increase land and/or labor productivity. Standard of living and per capita income will increase with the increase of labor productivity. Agricultural output Y can be changed by varying the proportions of the land resources A, labor L, and capital C. Labor productivity can be defined as $\frac{Y}{L}$. The increase of $\frac{Y}{L}$ will increase the standard of living and per capita income. Labor productivity can be expressed (P.A. Cowell,

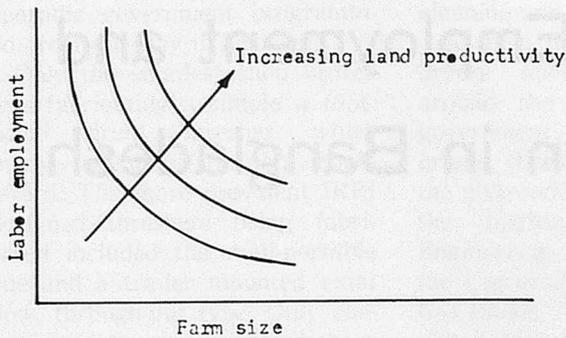


Fig.1 Relationship between labor employment and farm size.

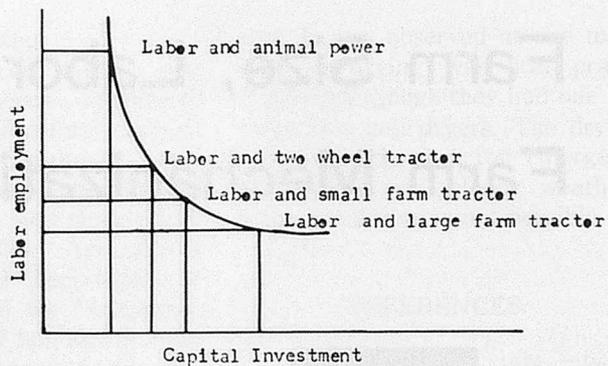


Fig.2 Relationship between labor employment and capital investment

1973 and B.K. Bala, 1978) as Y/L
 $= Y/A \times A/L = \frac{Y}{A} \cdot \frac{L}{A} \dots\dots\dots (1)$

Where Y/A
 = Land productivity,
 yield/acre.

Where L/A
 = Labor employment,
 labor/acre.

For developing countries farm size is directly related to labor productivity. Therefore, from equation, (1), farm size

FS can be expressed as
 $FS \propto \frac{Y}{A} \cdot \frac{L}{A} \dots\dots\dots (2)$

or $FS = K_1 \left(\frac{Y}{A} \cdot \frac{L}{A} \right) \dots\dots\dots (3)$

Where, K_1
 = constant of
 proportionality.

$\frac{Y}{A}$ can be expressed as $\frac{Y}{A}$
 $= \frac{Y}{C} \times \frac{C}{A} \dots\dots\dots (4)$

Where Y/C
 = Capital productivity.

Where C/A
 = Capital intensity.

From equation (3), it is quite clear that farm size is directly related to land productivity and inversely related to labor employment. For constant values of land productivity, the relationships between farm size and labor employment can be represented by a family of hyperbolas as shown in Fig.1.

For each constant value of land productivity, there are a number of different combination of farm sizes and labor employment. When farm size is large, labor employment will be less and level

of mechanization will be high. When farm size is small, labor employment will be higher and the level of mechanization will cover only crude or intermediate technology. It is important to note from equation (4), that the land productivity can be increased by the introduction of improved varieties and seeds, by use of fertilizers and pesticides. Land productivity can be further increased by better water control and management and multiple cropping in conjunction with seed and fertilizer technology. From Fig.1 it is quite obvious that land productivity will increase the demand for labor, and both land and labor productivity are influenced by the timelines of operation. Peak labor requirement will make the farmers justify the introduction of agricultural machinery. Labor productivity is desired in agricultural mechanization. Lower labor productivity at the expense of small farm sizes will lower the standard of living of rural population and calls for land reform. Farm sizes are very small in Bangladesh and some people think that small farms should be consolidated for efficient production. Large farm sizes are beneficial if they increase the productivity. According to T.W. Schultz. "The size of farms may change as a consequence of transformation. They may become either larger or smaller—but changes in size are not the source of the economic growth to be had from this modernization process". There

are also small farm sizes where productivity is high. Japan is an example.

The equation (1) can be expressed as :

$$\begin{aligned} \frac{Y}{L} &= \frac{Y}{A} \cdot \frac{L}{A} \text{ or } \left(\frac{L}{A} \right) = \frac{Y}{A} \cdot \frac{1}{L} \\ &= \frac{\left(\frac{Y}{A} \right)}{\left(\frac{Y}{C} \right) \times \left(\frac{C}{L} \right)} \\ \text{or } \left(\frac{L}{A} \right) &= \frac{\left(\frac{Y}{A} \right)}{\left(\frac{Y}{C} \right)} \cdot \left(\frac{1}{\left(\frac{C}{L} \right)} \right) \\ &= K_2 \times \left(\frac{1}{\left(\frac{C}{L} \right)} \right) \dots\dots\dots (5) \end{aligned}$$

Where $K_2 = \left(\frac{Y}{A} \right) / \left(\frac{Y}{C} \right)$
 = Constant and $\frac{C}{L}$
 = capital investment.

For constant land productivity and capital productivity, the relationship between labor employment and capital investment is a hyperbola as shown in Fig.2. The optimum technology and farm units are determined by means of capital investment. Thus the optimum farm size and technology will change with economic growth.

Case Studies

A. Farm Size, Labor Employment and Net Farm Income

Farm size is directly related to land productivity and inversely related to labor employment. For a constant land productivity,

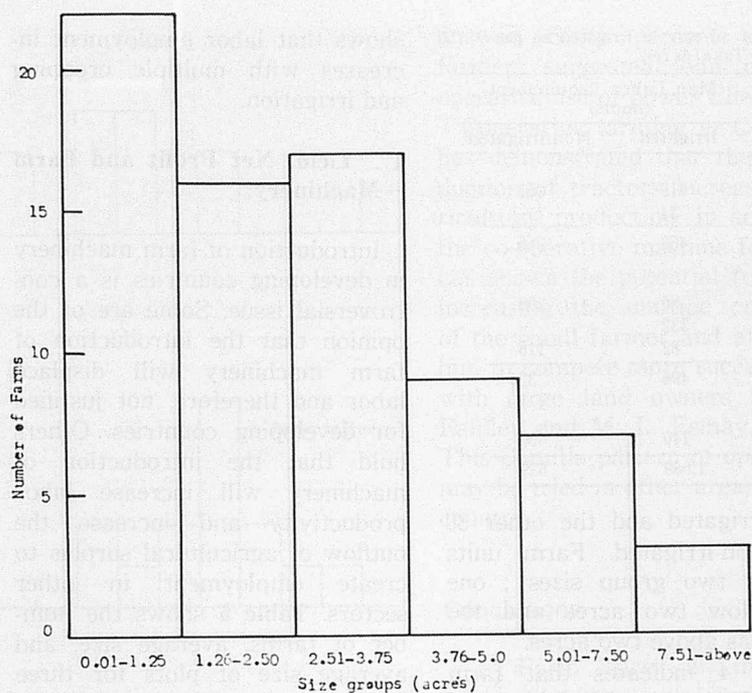


Fig.3 Distribution pattern of farm size

Table 2.

Size Groups (Acres)	No. of Farms	Average size of Land cultivated (Acres)	Working Member/acre of Net Land Area
0.10-1.25	22	0.50	2.62
1.26-2.50	16	1.85	0.94
2.51-3.75	17	3.22	0.56
3.76-5.00	9	4.42	0.55
5.01-7.50	7	5.90	0.31
7.51 and above	3	8.60	0.31
All Farms	-	2.73	0.64

Source : Islam, Md. Nazrul. Farm Size Efficiency And Effect of Different Inputs on Farm Income In a Selected Area of Bangladesh. M.Sc. Ag. Econ. Thesis, 1974.

this relationship can be

$$\text{expressed as: } Y = \frac{k}{x} \dots\dots\dots (6)$$

Where y

= Labor employment,
(Member/Acre)

Where x

= Farm size, (Acre/Farm)

Where k

= Constant.

To test this hypothesis, two selected villages of P.S. Saria-kandi, Dist. Bogra, Bangladesh will be considered. The distribution pattern of farm sizes is shown in Fig.3. Table 2 shows the size group, average size of cultivated land and employment.

To find the relationship between farm size and labor employment the data of Table 2 was fitted to the equation (6). The fitted curve can be expressed as

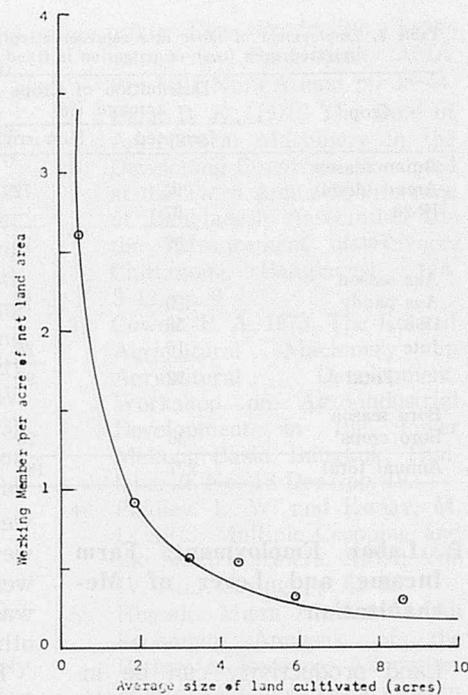


Fig.4 The fitted curve and observations

Table 3.

Size Group (Acres)	Net Income (Taka)
0.10-1.25	90.04
1.26-2.50	143.13
2.51-3.75	242.49
3.76-5.00	50.60
5.01-7.50	176.73
7.51 and above	359.05

Source : Islam, Md. Nazrul. Farm size efficiency and effect of different inputs on farm income in a selected area of Bangladesh. M. Sc. Ag. Econ. Thesis, 1974.

Table 4. Income of a representative farm of an acre in the irrigated and non-irrigated area. (Deep tube-well irrigation).

Crop	Distribution of Crop acreage (%)		Farm Income(Taka)	
	Irrigated	Non-Irrigated	Irrigated	Non-Irrigated
Aman (deshi)	92	74	451.37	237.77
IR-20	7	-	66.01	-
Aman session total	99	74	517.38	237.77
Aus	20	71	46.02	225.29
IR-8	56	-	485.32	-
Jus session total	16	26	15.16	41.04
Boro crops ¹	92	97	546.50	266.33
Boro crops ¹	36	20	230.42	9.73
Boro session total	36	20	230.42	9.73
Annual total	227	191	1,294.30	513.83

¹Boro crops include boro paddy for irrigated area hence consider wheat, oil seeds, pulses, sweet potato etc. for non-irrigated area.
Source : Hussain, Mirza Altaf. An economic analysis of the pattern of resource allocation, enterprise combination, labor employment and farm income in farms using alternative technologies in selected area of Sherpur Thana of Mymensingh District, M. Sc. Ag. Econ. Thesis, 1974.

$Y = 1.713$. The fitted curve and observations are shown in Fig.4 and this curve is statistically quite significant. Table 3 shows

that net income is highest for farm size 7.51 acres and above, and the next to the highest is 2.51-3.75 acres.

Table 5. Employment of labor in a representative farm of an acre in irrigated an non-irrigated area (cost of irrigation is fixed @ 50 Taka/Acre).

Crop	Distribution of Crops acreage (%)		Man Labor Requirement (hours)	
	Irrigated	Non-irrigated	Irrigated	Non-irrigated
Aman season				
Aman (deshi)	92	72	419	265
IR-20	07	—	34	—
Total	99	72	453	265
Aus season				
Aus paddy	20	71	80	208
IR-8	56	—	332	—
Jute	16	26	82	116
Total	92	97	496	324
Boro season				
Boro crops ¹	36	20	140	50
Annual total	227	189	1,089	639

B. Labor Employment, Farm Income and Lever of Mechanization

Land productivity can be increased by increasing capital intensity in the form of agricultural inputs. This can also be further increased by better water control and management. In addition, labor productivity will also increase with increased land productivity.

To consider the impact of irrigation three villages of P. S. Sherpur, Mymensingh district will be considered. Total number of farms was 60, of which 30

were irrigated and the other 30 were non-irrigated. Farm units were of two group sizes ; one was below two acres and the other was above two acres.

Table 4 indicates that farm income increases with the level of mechanization. Further, more multiple cropping with irrigation increases employment. Table 5

Table 6. Power sources and coverage

Source	Average Size (acres)	Number of Farms	Average No. of Plots	Average Size of Plots(acres)
Bullock	7.62	13	21.38	0.36
Power tiller	8.50	14	18.64	0.42
Combined	5.25	16	15.25	0.38

Source : Main, Md. Shahjahan. A comparative study of the economics of cultivation by bullock and power tiller in the production of transplanted aman saddy in selected Areas of Bangladesh, M. Sc. Ag. Econ. Thesis, 1972.

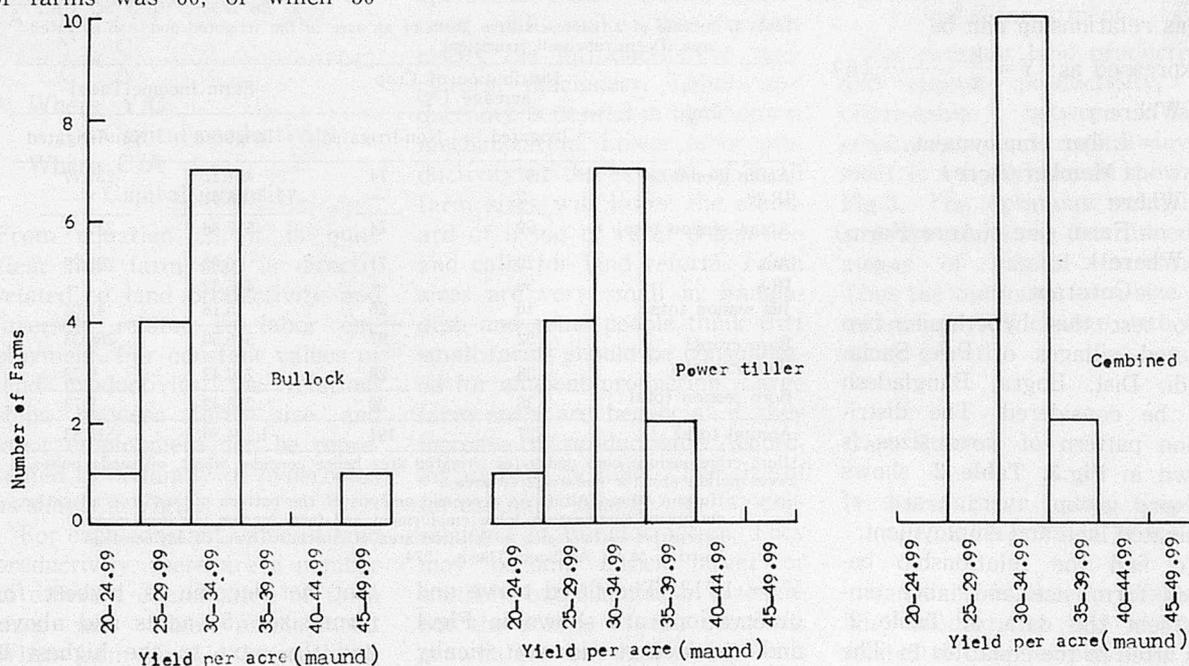


Fig.5 Distribution patterns of yield per acre for different sources of draft power (Note : One maund = 82.286 pounds)

shows that labor employment increases with multiple cropping and irrigation.

C. Yield, Net Profit and Farm Machinery.

Introduction of farm machinery in developing countries is a controversial issue. Some are of the opinion that the introduction of farm machinery will displace labor and therefore, not justified for developing countries. Others hold that the introduction of machinery will increase labor productivity and increase the outflow of agricultural surplus to create employment in other sectors. Table 5 shows the number of farms, average size, and average size of plots for three power sources namely ; bullock, power tiller and their combination for some selected areas in the districts of Mymensingh and

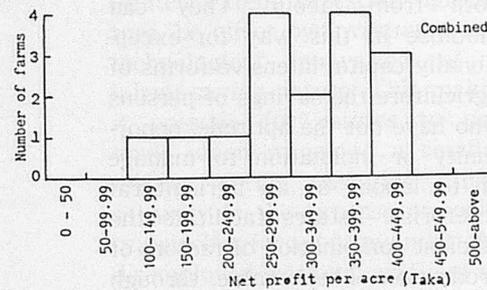
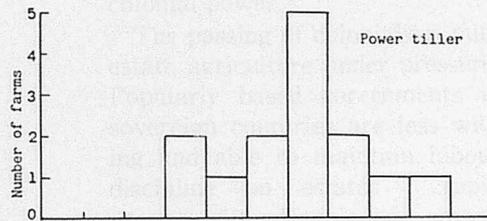
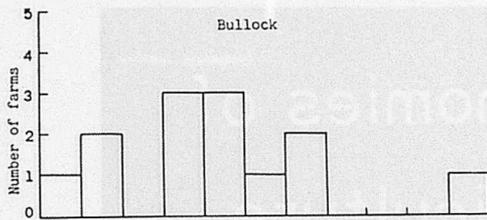


Fig.6 Distribution patterns of net profit per acre for different sources of draft power

Tangail.

Fig. 5 shows that the yield per acre is highest for combined bullock and power tiller as draft power.

Fig. 6 indicates that net profit per acre is also high for combined bullock and power tiller suggests the desirability of selective mechanization.

The average size of farm under power tiller was comparatively larger than those for either source of power. Fifteen percent of the farmers purchased power tiller jointly with two partners and the rest purchased and owned them individually in the study area. Half of the farmers reported that their income has increased with the use of power tiller and the rest gave negative

answer. Sixty percent of the farmers suggested joint or cooperative use of power tillers.

Cooperative farming at Comilla, has demonstrated that the introduction of tractors increases agricultural production. In addition, the co-operative machine farming has shown the potential for both increasing the multiple cropping of the small farmer and allowing him to compete more successfully with large land owners (L. W. Faidley and M. L. Esmay, 1973). This Comilla pattern of operation may be tried in other areas of the country.

Conclusions

- i) Farm size is inversely related to employment for constant land productivity.
- ii) Optimum farm size and technology change with capital investment and economic growth.
- iii) Multiple cropping with better irrigation and water management increases land productivity and employment.
- iv) Introduction of farm machinery increases land productivity and labor productivity even as it displaces some labor.
- v) Farmers in the study areas have shown interest in machine farming rather than walking behind animals.
- vi) Labor productivity can be increased with the introduction of machinery and increasing farm size and these will cause farm capital movement to non-farm sector to provide employment for surplus agricultural labor. Selective mechanization is justified in Bangladesh


REFERENCES

1. Ahmed, Iftikhar, 1977. Appro-

appropriate Rice Production Technology for Bangladesh. AMA Vol. VIII, No. 4 Autumn, pp. 38-44.

2. Bala, B. K., 1978. The Role of Agricultural Machinery in the Developing Countries. Presented at the Third Annual Conference of Bangladesh Association for the Advancement of Science, Chittagong, Bangladesh. Jan. 8-12, pp. 9.
3. Cowell, P. A. 1973. The Role of Agricultural Machinery in Agricultural Development. Workshop on Agro-industrial Development in the lower Mekong Basin, Bangkok, Thailand. 26 No.-18 Dec., pp. 10.
4. Faidley, L. W. and Esmay, M. L., 1973. Multiple Cropping and the Small Farmers. AMA, Vol. IV, No.1, Spring, pp. 62. 65.
5. Hussain, Mirza Altaf, 1974. An Economic Analysis of the Pattern of Resource Allocation, Enterprise Combination, Labor Employment and Farm Income in Farms Using Alternative Technologies in Some Selected Areas of Sherpur Thana of Mymensingh District, M. Sc. Ag. Econ. Thesis, Bangladesh Agricultural University, Mymensingh.
6. Islam, Md. Nazrul, 1974. Farm Size Efficiency And Effect of Different Inputs of Farm Income in a Selected Area of Bangladesh, M. Sc. Ag. Econ. Thesis, Bangladesh Agricultural University, Mymensingh.
7. Khan, A. U., 1975. Mechanization Technology for Tropical Agriculture. AMA Vol. VI. No. 1, Spring pp. 30-37.
8. Mian, Md. Shahjahan, 1972. A Comparative Study of the Economics of Cultivation by Bullock and Power Tiller in the Production of Transplanted Aman Paddy in Selected Areas of Bangladesh, M. Sc. Ag. Econ. Thesis. Bangladesh Agricultural University, Mymensingh.
9. Schultz, T. W., 1965. Transforming Traditional Agriculture. Yale University Press, pp. 110.
10. Weil, W. S. 1976. Mechanization of Agriculture in Relation to Development in Developing countries. AMA Vol. VIII, No. 1, Winter. pp. 32-37. ■■

Economies and Diseconomies of Scale in Malaysian Agriculture



by

Raymond Crotty

Research Fellow
The Institute of Development Studies
at the University of Sussex
England

It is generally if indeed not universally, accepted in Malaysia that treecropping, in general, and rubber and oil-palm production in particular, are enterprises appropriate to estate agriculture, while padi-growing is the proper domain of smallholding agriculture. Estates have higher rubber yields than smallholdings; they account for virtually all the palm-oil output. Padi-growing is practiced only by smallholders. This difference in the emphasis on enterprises as between estates and smallholdings has been recognised at policy-making level from early colonial times and has influenced policy in various ways. It is an important consideration underlying the policy on padi-growing, which regards the attainment of self-sufficiency in rice and the measures directed to that end to a large extent as a means of increasing smallholders' incomes in compensation for their inadequate share in rubber and palm-oil production. Both the superiority of estates in tree-crop enterprises and the superiority of smallholdings in padi-growing need to be challenged.

Estates and Tree Crops

Economies of scale are normally less in agriculture than in manufacturing. Tree-crop agriculture, especially, has few economies of scale. The labour required to tap 1,000 rubber trees is approximately ten times as much as that required to tap 100 trees. Labour and other resources to perform a given husbandry operation on a 1,000 acre tree-crop holding is approximately 1,000 times as great as those needed on a 1 acre holding. There are scale economies to be realised at the collection and processing stages, but smallholders can get the benefit of these by using services provided cooperatively or by public agencies like RISDA.

The superiority of estates in tree crop production, as reflected in higher yields, more rapid expansion and a larger share of the output, stems from their ability to mobilise and to use effectively the large capital on which tree crop enterprises are peculiarly dependent. Estates are functionally specialised; they divorce ownership from management and

both from labour. They can mobilise in this way for exceptionally capital-intensive forms of agriculture the savings of persons who have not the aptitude, opportunity or inclination to manage or to labour at an agricultural enterprise. Estates facilitate the efficient combination of factors of production. They enable, through the stock exchange, savers to invest or disinvest at will; they have evolved, through rigorous selection, an efficient management hierarchy; through various incentives and disincentives, reinforced by a large reserve army of unemployed, they maintain an efficient labour force. Estates, because of their ability to mobilise capital and to use it effectively, are superior to capital-starved smallholdings in agricultural enterprises which are exceptionally capital-intensive, as most tree-crops are.

Estate agriculture, producing commodities cheaply and profitably, is peculiarly appropriate to colonialism. It provides for the metropolitan country low cost commodities and, simultaneously, a profitable outlet for surplus capital and for surplus manufac-

tured goods.

Economies of scale in agriculture do not usually outweigh the inefficiencies of centralized management, so that the one-family farm is, in most cases, the most efficient farm firm. Estates prosper under exceptional conditions which, in addition to engagement in exceptionally capital-intensive enterprises, normally also include a labour force held docile by a colonial power.

The passing of colonialism puts estate agriculture under pressure. Popularly based governments in sovereign countries are less willing and able to maintain labour discipline on estates; rapid growth of trade unionism among estate workers is a characteristic of most former colonies. The growth of trade union power under native government can, to a limited extent in estate agriculture, be offset by investment and technological innovation of a labour-saving nature. This makes it possible for estates to pay trade union wages to a smaller labour force, securing their solvency at the expense of society, which is forced to maintain the unemployed workers, who join an existing and already increasing supply of surplus workers.

The ability of estates, which do not enjoy manufacturing industry's economies of scale, to pay trade-union-determined wages is limited. Estate agriculture, as a result, has been losing its market share in the postcolonial era. Estate-dominated sugar production in the former British West Indian Federation has been losing ground to smallholder producers of cane and beet sugar in other countries. Production there declined from an annual average of 823,000 tons in 1956-58 to 699,000 tons in 1973-75, while annual world sugar production increased from 44.8 m. tons to 78.5 m. tons during the same period. (1. FAO. 1959 and 1975). The share of Malaysia's estate-dominated industry in the world rubber

market declined from 31 per cent in 1950 to 15 per cent in 1975, (2. International Rubber Study Group) the loss of market share in this case being to synthetic rubber manufacturers enjoying manufacturing's economies of scale, which are not available to estate producers.

Proposals have been made for mobilising capital for its efficient use by Malaysian smallholder tree-crop farmers. (3. A. Crotty, 1978). An effective combination of inexpensive and efficient smallholder labour and capital promises to increase output at lower cost and to increase employment at higher incomes than are now generally available in rural Malaysia. The proposals involve the replacement of estate agriculture, which is increasingly anachronistic in the post-colonial era, by a smallholding agriculture, supported by appropriate institutional arrangements for supplying, and ensuring the efficient use of the large capital required for tree-cropping.

Smallholdings and Padi-Growing

Traditional Malay smallholder padi-growing, located in riverine areas subject to periodic inundations, is unproductive. Adequate for a small, stable population, it has been chronically unable to meet the needs of a rapidly expanding population. This became most painfully obvious during the Second World War, but the spectre of cereal shortages has persisted. Malaysia, located in one of the great grain-deficit regions of the world, continues to import large quantities of grain.

Malaysia's grain deficits persist notwithstanding major efforts to expand local production. These efforts include especially the provision of irrigation facilities, which have enabled most traditional padi-growing locations to switch to double-cropping. Exten-

Table 1. Malaysian Rice Production and Net Cereal Imports, 1966-1973

Year	Rice Production (000 tons)	Net Cereal Imports (000 tons)
1966	667	610
1967	659	709
1968	780	798
1969	867	722
1970	915	796
1971	989	665
1972	1,002	670
1973	1,106	765
1974	1,164	844

Note: "Cereals" are all items included in the S. I. T. C. codes 041000 to 048300.

Source: Malaysia Department of Statistics, External Trade Statistics, annually 1973; and Monthly Statistical Bulletin, June, 1975.

Table 2. Area of Padi Planted ('000 acres)

Item	Wet Padi Main season	Wet Padi Off season
Average 1965/66 to 1969/70	913	210
Average 1970/71 to 1974/75	913	509

Source: Department of Statistics, Monthly Statistical Bulletin of West Malaysia June, 1976, Kuala Lumpur.

sion, credit and marketing services have also been provided.

Double-cropping, while making possible a very considerable expansion in grain production, has also made explicit serious limitations in traditional smallholder methods of production. These limitations arise from the slowness of the methods and the problems this causes in adhering to a tight double-cropping schedule. There was, with traditional single-cropping, a lag of about 150 days from the harvesting of one crop to the planting of the succeeding one. The maturation period for quick-maturing varieties used in Malaysia for double cropping is from 120 to 150 days. Allowing five days for planting and ten for harvesting, the maximum lag between the completion of harvesting and the commencement of planting consistent with double-cropping is around 30 days, or a fifth of the time lag between crops with single-cropping. Land, therefore, has to be prepared for crops twice annually in a shorter total time and by draft animals that are deprived of the nutritious grazing which they used to get

Table 3. Summary of Survey Results on Use of Labour in Padi Production, Malaysia

Location	Padi Acreage per Farm	Family Workers per Farm	All Operations		Harvesting	
			Man-days per Acre	of which Hired(%)	Man-days per Acre	Of which Hired(%)
Province Wellesley	na	na	33.8	55.0	14.5	75.9
Kemubu	na	na	39.5	12.9	10.7	18.7
Malacca north	1.3	1.7	na	16.2	na	na
Malacca south	1.6	1.3	na	9.7	na	na
Malacca central	3.5	3.0	na	37.4	na	na
Sungai Manik	3.2	3.8	27.4	13.5	8.2	29.3
Seberang Perak Stage I.						
a) Total sample	2.8	2.6	29.2	22.6	10.1	29.7
b) Sub-sample	3.4	2.6	24.9	33.7	9.3	68.8

Source: Various Reports by Ministry of Agriculture and Cooperatives, 1967-1975.

Table 4. Production costs on 2- and 5-acre Padi Lots on a FELCRA scheme in Southwest Perak in 1975.

Cost Items	2 Acres ₹	5 Acres ₹
Seeds, fertilizers and insecticides	136	340
Quit rent and water rent	6	15
Nursery work	7	18
Land preparation*	40	235
Transplanting	8	200
Weeding	6	15
Harvesting and bagging	15	550
Field transport	40	100
Zakat (religious toll)	100	250
Total	358	1,723
Marginal cost per acre:	$\frac{1,723-358}{3} = ₹ 455$	

* Land preparation on two-acre plots are assumed to be made by family labour, using draft buffaloes. The actual hire-cost of tractors is taken for five-acre lots. Family labour is charged at S 1.50 per hour.

from stubble-grazing. This accounts in part, at least, for the decline in buffalo stocks in Malaysia and other South East Asian countries (4. R. Crotty).

Other operations have also to be performed more expeditiously. Harvesting, which normally lasted from February to May in Tanjong Karang in the State of Selangor prior to the introduction of double-cropping, has now to be concentrated into February-/March for the main season and for the off-season crop into October, a month with one of the highest average rainfalls. (5. Narkwasdi and Selvadurai). Double-cropping thus requires twice as much padi to be harvested in little over half the harvesting days.

The severity of the constraints of seasonal labour shortages on double-cropped padi using traditional methods is evidenced by the heavy reliance on hired labour (Table 3).

The most common form of payment for harvest labour in Malaysia is the "10-2" system. That is, of every 10 bags of padi harvested, the harvesters get two. It was observed by the writer in southwest Perak State in 1975 that the proportion taken by hired harvesters rose to 30 per cent where the crop was light. The cost of harvesting cereals mechanically in temperate countries, by contrast, normally does not exceed 5 per cent of the value of the crop.

The need to hire expensive off-farm facilities to adhere to a double-cropping schedule with smallholder padi-growing technology causes the marginal cost of padi production to rise sharply beyond about two acres per holding. Table 4 shows the costs of growing padi on 2 and 5 acre padi lots on a FELCRA scheme in Southwest Perak in 1975, as indicated by the Manager.

The marginal cost of padi-growing rises sharply on lots over about two acres and ap-

proaches or exceeds the value of the crop on five-acre lots.

Seasonal labour and draft-power shortages rather than the shortage of irrigated land can, with double-cropping, be the effective constraint on padi production. Though the irrigated acreage available for main and off-season padi production has been increasing consistently in all Malaysian States, of the 220 observations of main and off season padi acreages for Peninsular Malaysia's eleven States over the decade, 1965/66 to 1974/75, 50 register declines on the acreage planted in the preceding year. That is, in nearly 23 per cent of cases, the State acreages of padi planted were less than in the preceding year, though the acreage available for planting was in all cases at least as great. In the virtual absence of rotations on padi-land, it is clear that substantial acreages of irrigated padi land fail frequently to get planted and are left idle.

Smallholders in Southwest Perak who, in 1968, were allocated five-acre lots of drained and irrigated swamp forest and a subsidy of \$80 per acre for clearing the land for padi-growing, in all cases cleared the land and collected the full subsidy, but in no

case levelled more than three acres, which appears to be the maximum area of double-cropped padi land which an individual can handle profitably with existing smallholder technology.

Part of this area was subsequently further developed by FELCRA, which levelled all the land, put it under cultivation and returned it to the original allottees. FELCRA's manager on the scheme reported (6. Private) that the grantees were sub-letting cleared lots in excess of the 2 acres which they could operate profitably.

Adherence to a double-cropping schedule may, in these circumstances, reduce output. If existing labour and draft facilities are insufficient to double-crop all the land, production can be increased by reverting to single-cropping, which allows the land to be occupied for a longer period by a slow-maturing, heavier yielding variety. The labour and draft bottlenecks can be widened by allowing operations to be carried out over protracted periods. However, while post-hoc the reversion to single-cropping may be warranted when there is insufficient labour and draft power to cope with the seasonal peak requirements of double-cropping,

the capital cost of irrigation for single-cropping is likely to be, ante-hoc, prohibitively expensive.

These problems may worsen in time as, to meet expanding grain requirements, more new areas, like Southwest Perak, are irrigated for padi-growing. Large numbers of smallholders will need to be moved to these areas. If some irrigated land is unworked, or only partly worked now, the new lands will be fully cultivated only if rural incomes are reduced to force more people to migrate to the new areas, or padi-prices are raised to induce them to do so.

Using smallholder technology, increasing labour costs with double-cropping or increasing capital costs with single-cropping, will make it difficult for Malaysia to meet its expanding cereal requirements. A large and growing labour surplus, with possibly declining incomes, as now exists in at least parts of rural Malaysia, may, nevertheless, cause smallholdings to be the most efficient producers of the country's padi requirements. But measures which mobilise capital for, and cause its efficient use by, smallholder tree-croppers, will raise the value of smallholder labour. These measures, if successfully implemented, will therefore raise the cost of padi produced by traditional methods. It is in this context that it becomes relevant to consider alternative methods of production.

Advantages of Mechanization

Grain-growing is an agricultural enterprise that lends itself peculiarly well to mechanisation. Mechanization enables tasks to be performed more expeditiously, more timely, and, frequently, better. Moreover, double-cropping, which causes difficulties with traditional padi-growing methods, enhances the attractions of mechanisation. It permits season-

al equipment, like ploughs, drills and harvesters, to be used twice as intensely and thus halves their capital cost, which is frequently the principal cost in mechanised cereal-growing. Well paid, skilled operators can also be employed more fully and more effectively when double-cropping is practised.

Some mechanisation of smallholder padi-growing has occurred in Malaysia, mainly in the form of tractorised ploughing and cultivations. This has relieved the draft problem referred to and has expedited cultivations. It has, however, realised few of the economies of scale attainable with mechanised grain production. Tractors that are small enough to operate efficiently in small padi-fields are less efficient sources of draft power than large ones, but large tractors that are efficient sources of draft power work inefficiently in small fields where an unduly large proportion of their time is spent turning on, and impacting headlands, and where impacted headlands represent an unacceptably high proportion of the total area. Much grain-growing equipment cannot be, or has not been, effectively adapted for operation on small padi fields. Grain harvesters are a case in point, and harvesting is an increasingly severe constraint on smallholding padi-production. The realisation of the benefits of mechanised grain production in large measure depends, like the realisation of the benefits of steam-power in manufacturing, on reorganising production from small to large scale; few of the benefits of mechanisation can be realised in small padi fields, just as few of the benefits of steam power were realised by cottage industries.

Large scale production, as well as being conducive to the efficient use of the machinery which has exceptional advantages when land is double-cropped, has other important attractions for

irrigated padi-growing. Efficient synchronising of cultivation, irrigation and drainage is more likely when all operations are controlled by a single firm than when cultivation is carried out by many small firms and the crucially important irrigation and drainage services are supplied by a different organisation. The pests and diseases to which double-cropped padi in the rain-forest tropics appears to be peculiarly prone, are likely to be better controlled by a few large firms than by a multiplicity of small ones. There will, for example, be fewer bunds to shelter rats on large padi fields. The prevention of rat infestation from the periphery is more economical for large growers for whom the periphery is shorter relative to the area worked than for the small grower. Again, for example, the large grower can use aerial spraying for disease and pest control, when this would be impractical for small growers.

A Feasibility Study of Small and Large Scale Padi Growing

The foregoing considerations underly a study of the feasibility of two alternative ways of developing for padi-growing 19,000 acres of swamp forest on the west bank of the River Perak in Southwest Perak. One way, referred to as Alternative A, was by smallholder settlers and the other, referred to as Alternative B, was as a single, large scale padi-growing enterprise. Alternative A was conceived on lines which were felt to be most favourable to padi-growing by smallholders on newly settled areas. Bearing in mind the limited padi acreage which numerous surveys suggest can be handled by smallholders, Alternative A envisaged that a further 19,000 acres of available swamp forest, which is out of irrigation command, would be cleared and

planted to rubber, oil-palm, cocoa or coconut with a view to providing 9,500 settlers each with 2 acres of padi-land and two acres of crops.

Particulars of both projects are given in Appendix Tables 1 to 7.

The indicated investments, internal rates of return (IRR) and the present discounted values (PDV) at 10 percent rate of discount are :

Item	Investment Required \$ mn.	IRR %	PDV \$ mn.
Alternative A	44.6	15.0	24.144
Alternative B	11.9	46.3	90.681

The total net revenue from the projects over a 33-year period are \$328mn for Alternative A and \$449mn for Alternative B. Alternative B would, therefore, be superior even if capital were free.

Alternative A gives more employment than Alternative B. In so far as the level of employment is regarded as a proxy for a preferred, more equitable allocation of income, Alternative A may be preferable in this sense. But employment creation, as distinct from the the income-distribution associated with a given employment level, cannot plausibly be regarded as a policy objective. Using the profits from Alternative B, larger incomes could be given to more people, without requiring them to work or to move from their present places of residence, than if Alternative A were adopted.

The issue does not, however, end there. Alternative B, as noted, requires less capital than Alternative A. A complete comparison of the development of new padi areas by labour-intensive smallholdings or by machinery-intensive large farms must consider also the returns from capital saved by adapting Alternative B instead of Alternative A in the next most productive outlet available. This is done in Appendix Tables 8 to 11.

The most productive use for capital in Malaysia after mechanised padi growing, is considered to be rehabilitating smallholder tree-crops on the lines suggested A Crotty, 1978. Using the same capital over the same period in Alternative B with supplementary "second generation" projects, as in Alternative A, the results are :

Item	IR %	PDV \$ mn.	PDV of Value Added \$ mn.
Alternative A	15.0	24.144	141.415
Alternative B with "second generation" projects	24.9	125.678	244.548

Alternative B with second generation projects employs more labour virtually at all stages than Alternative A. It requires, over a 33-year period, on average 5,039 thousand man-days, or 2 times as many as Alternative A, which requires on 2,317 thousand man days annually.

Conclusion

An effective marriage of capital with smallholder labour for tree-crop production is likely to raise the cost of labour in Malaysia to a level which makes padi production with traditional smallholding technology prohibitively expensive. Large scale mechanised padi-growing is likely, under these circumstances, to be the most efficient means of meeting Malaysia's growing requirements. The efficient organisation of Malaysia's agriculture requires smallholdings to concentrate on tree-cropping and padigrowing to be undertaken by large farms, which is the reverse of the accepted view of the respective roles of small and large firms in Malaysian agriculture.

REFERENCES

1. FAO Production Yearbooks, 1959 and 1975.
2. International Rubber Study Group, World Rubber Statistics Handbook, 1946-1970, Vol. 1, and Rubber Statistical Bulletin, Vol. 31, No.3, December, 1976.
3. A. Crotty, "The Rate of Time Discount as a Constraint on Smallholder Tree-cropping", B. A. dissertation, Trinity College, Dublin, Ireland, May, 1978.
4. R. Crotty, Principles of Cattle Economics (In press).
5. U. Narkwasdi and S. Selvadurai, Economic Survey of Padi Production in West Malaysia, (Kuala Lumpur, 1968), pp. 34-5.
6. Private communication, August, 1975. ■■

Appendix Table 1. Alternative A: Development of 19,000 Acres of Swamp forest for Padi Growing and 19,000 Acres for Rubber Growing by Smallholders

	Year 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33		
1. Number of settlers introduced		1500	1500	1500	1500	1500	1500	500																											
2. Land developed for padi, acres	3000	3000	3000	3000	3000	3000	3000	1000																											
3. Acres of padi grown, single crop equivalent	6000	12000	18000	24000	30000	36000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	38000	
4. Padi development: 2800 acres S1260; balance S1500/acre	S000	3828	4500	4500	4500	4500	1500																												
5. Roads, surfaced, 7 miles	S000	500	500	500	250																														
6. Road, gravel and earth, 77 miles	S000	350	350	350	350	1350	350	448																											
7. Public cost of introducing settlers	S000	1500	1500	1500	500	1500	1500	500																											
8. D.I.D. maintenance @ \$25/acre	S000	75	150	225	2300	375	450	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475	475
9. Direct costs of padi-growing @ \$108/acre	S000	648	1296	1944	6582	3240	3888	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104	4104
10. Settlers' maintenance, @ \$1.100/annum	S000	1650	3300	4950	15600	8250	9900	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450	10450
11. Total of above costs (4 to 10)	S000	4678	11596	13719	12842	18215	37588	15977	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	15029	
12. Padi revenue @ 500 gantangs/acre @ \$1/gantang	S000	3000	6000	9000	-3000	15000	18000	10000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000
13. Net padi revenue	S000	-4678	-6223	-5596	-4719	1842	-3215	412	3023	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	3971	
14. Labour available, mandays	000	390	780	1170	560	1950	2340	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	2470	
15. Labour required for padi @ 30 days/acre, mandays	000	180	360	540	720	900	1080	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	
16. Surplus labour (14-15), mandays	000	210	420	630	9840	1050	1260	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	
17. Land under development for, or growing rubber, acres	000	2000	6000	12000	000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	19000	
18. Mandays required for rubber	000	160	386	636	870	483	424	546	566	708	955	1136	1294	1363	1418	1494	1556	1692	1863	2015	2115	1938	1858	1773	1768	1633	1557	1480	1429	1370	1257	1201			
19. Labour surplus or shortfall (-), (16-18), mandays	000	50	34	-6	-30	567	836	784	764	622	375	194	36	-33	-88	-164	-226	-362	-533	-685	-785	-608	-528	-459	-443	-438	-303	-227	-150	-99	-40	73	129		
20. Cost of non-settler labour @ \$4/day	S000	120	642	1358	2330	2915	2491	2734	2439	2130	1843	1843	1847	1855	1865	1873	1863	1916	2029	2203	2388	2322	2294	2257	2249	2244	2191	2167	2148	2129	2107	2076	2060		
21. Rubber expenses, other than labour	S000	400	800	1200	1400																														
22. D.I.D. costs on rubber land @ \$/200/acre	S000	400	800	1200	1400																														
23. Total rubber costs (20+21+22)	S000	400	920	1842	2782	2450	2915	2491	2734	2439	2130	1843	1847	1987	2217	2529	2767	3364	4161	4943	5528	4754	4406	4093	4021	3996	3403	3075	2748	2525	2267	2076	2060		
24. Rubber revenue	S000																																		
25. Net rubber revenue	S000	-400	-920	-1842	-2782	-2450	-2915	-2491	-2228	-655	1914	5316	7165	8522	9353	9987	10853	11616	13128	14975	16584	17621	15801	14943	15253	14156	14088	12707	11893	11126	10717	10263	8660		
26. Net project revenue (13+25)	S000	-5078	-7143	-7438	-7501	-6292	-6130	-2079	795	3316	5885	9287	11136	12493	13324	13958	14824	15587	17099	18946	20555	21592	19772	18914	18224	18127	18059	16678	15864	15097	14688	14234	12816	12031	

Notes: 1. National average padi yields are assumed.
 2. Padi production costs are those reported by the manager of the FELCRA padi-land rehabilitation project in southwest Perak.
 3. Settler maintenance and casual labour costs, at \$4/day, are slightly less than those reported by FELDA for settler labour.
 4. Rubber input/output days are as in Crotty, 1978 except that settler labour is budgetted to cost S/4.23/day, while kampong labour is budgetted to cost S/3/day.

Appendix Table 2. Alternative B: Development of 19,000 Acres of Swamp Forest for Mechanised Padi-Growing

Year	DID Development	Land Development	Road Construction	Buildings	Machinery Purchases	Machinery Maintenance, Repairs, etc.	Fuel	DID Maintenance	Salaries and Wages	Seed, Fertilizers and Other Inputs	Total Outlay	Padi Gross Revenue	Net Revenue
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)
1.	3190										3190		-3190
2.	1958	4042	1000	110				136			7246		-7246
3.	2897	1944	1000	110	506	217	66	201	165	738	7844	6511	-1333
4.	2888	2877	1000	110	853	322	98	297	210	1093	9748	9643	-05
5.	2888	2868	1000	110	1204	470	145	394	276	1618	10973	14278	3305
6.		2423	648	110	1551	616	192	475	360	2142	8869	18898	10381
7.					1782	726	231		416	2584	6215	22800	16585
8.					1844						6277		16523
9.					1847						6280		16520
10.					1834						6267		16533
11.					1836						6269		16531
12.					1815						6248		16552

(Costs and returns are repeated in five-year cycles as in years 8 to 12.)

Notes: Columns 2, 3, 4 and 5: See Appendix Table 3.
 Column 6: See Appendix Tables 4, 5 and 6.
 Column 7: Taken as 7½% of the purchase price of the machinery in hand.
 Column 8: See Appendix Table 7.
 Column 9: Taken as S 25/acre/annum
 Columns 10 and 13: See attached note.
 Column 11: Costs reported by FELCRA for padi-growing in southwest Perak.

Notes on Appendix Table 2, Columns 10 and 13. Salaries and Wages: Staff requirements at full production are:

	\$/Annum
70 tractor operators @ \$300/month	: 252,000
7 foremen tractor operators @ \$450/month	: 37,800
3 executives @ \$1,500/month	: 54,000
1 manager @ \$3,000/month	: 36,000
Total of above	: 379,800

30 temporary tractor drivers are employed for 1 month during harvesting, at a cost for two seasons, annually, of \$36,000.

Salaries of mechanics and fitters are included in the item "machinery, maintenance, repairs, etc."

Padi Gross Revenue: Output is assumed to be 600 gantangs/acre @ \$1per gantang for each of two crops annually. The assumption of a yield higher than the national average of 500 gantangs/acre rests on:

- i) centralised control of drainage and irrigation services;
- ii) better, more timely cultivations with high quality equipment;
- iii) combine drilling of seeds and fertilizers
- iv) centralised control of disease and pests;
- v) reduced grain losses due to combine harvesting, bulk transport of grain, and centralised drying and storage.

Appendix Table 3. Alternative B: Land Development Costs.

Drainage, irrigation, clearing and levelling costs are assumed to be 11 per cent less than for smallholder development. The land would be laid out in 50-acre, instead of 7-acre lots, requiring fewer drainage and irrigation canals.

Roads.

Surfaced link road, 7 miles @ S 250,000/mile	: \$ 1,750,000
Arterial gravel roads, 18½ miles @ S 125,000/mile	: \$ 2,312,500
Other gravel roads, 58½ miles @ S 10,000/mile	: \$ 585,000
Total	: \$ 4,647,500

Buildings.

Bulk grain store, workshop, spares and general stores	: \$ 450,000
Office and canteen	: \$ 100,000
Total	: \$ 550,000

Appendix Table 4. Alternative B: Equipment Requirements

Equipment	Number	Unit Cost \$	Total Cost \$
Tracked combine harvester, 12 ft. cut	48	90,300	4,334,400
Large tractor	20	76,000	1,520,000
Medium-sized tractor	50	26,550	1,527,500
Special disc plough	2	4,365	8,730
Disc plough	20	5,175	103,500
Disc harrow	17	5,670	96,390
Scraper/leveller	16	13,410	2,141,560
Combine corn-drill	14	15,030	210,420
Trailer, 8 ton	45	7,500	337,500
Road grader	5	25,000	125,000
Land rover	6	15,000	90,000
Fans and ducts to aerate stored grain	10	5,000	50,000
Total			8,418,000

Unit Cost list price, which includes a 5 per cent sales tax and a 4 per cent surcharge on harvesters and trailers, and a 4 per cent surcharge on other equipment.

Appendix Table 5. Alternative B: Schedule of Equipment Acquisition

	Yr.3	Yr.4	Yr.5	Yr.6	Yr.7
Combine harvesters	14	7	10	10	7
Large Tractors	6	3	4	4	3
Medium sized Tractors	15	7	10	10	8
Special Disc Ploughs	2				
Disc Plough	6	3	4	4	3
Disc Harrows	5	3	3	4	2
Scraper/levellers	5	2	4	3	2
Combine corn-drills	5	2	2	3	7
Trailers	14	6	9	9	1
Road Graders	2	1	1		1
Land Rovers	2	1	1	1	1
Fans and Ducts	3	2	2	2	1

This schedule is repeated in every subsequent quinquennium

Appendix Table 7. Alternative B: Fuel Consumption for 19,000 Acres Padi, Double-cropped

Operation	Days in two seasons	Hours/Day	Gallons/Hr.	No. of Units	Fuel per Annum
Ploughing	100	x 10	3.5	x 20	70,000
Discing	60	x 10	2.5	x 16	24,000
Plaining/levelling	60	x 10	2.5	x 16	24,000
Drilling	60	x 10	1.8	x 14	15,120
Combine harvesting	40	x 10	2.5	x 48	48,000
Haulage	40	x 10	2.5	x 30	30,000
Landrovers, aerating fans, etc.					19,000
					231,000

Cost of fuel: \$ 1 per gallon, Cost per annum: \$ 231,000

Appendix Table 9. Alternative B: Net Revenue from "Second Generation" Projects

Year	Smallholder Rubber Rehabilitation, financed by mechanizing padi-growing (Year of Planting)	Net revenue per acre of rubber by year of planting	Net revenue from rehabilitated smallholder rubber	Alternative B Projects	
				Net revenue from Padi	Total net revenue padi and rubber
	acres	\$	\$ 000	\$ 000	\$ 000
1	2975	-300	-893	-3190	-4083
2		-890	-893	-8139	-8139
3	19031	-133	-6105	-1333	-7438
4	3103	-254	-7396	-105	-7501
5	18219	-225	-9597	3305	-6292
6	17306	-204	-16511	10381	-6130
7	19227	39	-18664	16585	-1752
8		144	-10850	16523	-327
9		201	-10345	16520	6175
10		251	8886	16533	7647
11		265	2086	16531	14445
12		333	5767	16552	23319
13		363	13806	16523	30329
14		392	19146	16520	35666
15		477	22397	16533	38930
16		526	25630	16531	42261
17		890	30413	16552	45965
18		726	33477	16523	5 000
19		676	43035	16520	59555
20		569	43646	16533	60179
21		510	51125	16531	67655
22		652	53609	16552	70161
23		535	55055	16523	71578
24		488	51467	16520	67987
25		403	45540	16533	62073
26		367	43684	16531	60215
27		421	41273	16552	57825
28		301	39816	16523	56339
29		276	36046	16520	52566
30		241	30795	16533	47328
31		182	28498	16531	45029
32		183	25813	16552	42365
33		208	23162	16523	39685

Appendix Table 6. Alternative B: Annual Outlay on Machinery Purchases and on Interest on Outstanding Balances

Year	Machinery Cost \$ (1)	Down Payments \$ (2)	Subsequent Payments \$ (3)	Balance Outstanding \$ (4)	Interest \$ (5)	Total Payments (2+3+5), less trade-in value \$ (6)
3	2,528,780	505,756		2,023,024		505,756
4	1,230,365	246,073	404,605	2,602,711	202,302	852,980
5	1,711,410	342,282	601,463	3,370,376	260,271	1,204,016
6	1,693,700	338,740	1 875,289	3,850,047	337,038	1,551,067
7	1,253,745	250,749	1,146,281	3,706,762	385,005	1,782,035
8	2,528,780	505,756	1,346,880	4,382,906	370,676	1,843,995
9	1,230,365	246,073	1,346,880	4,020,318	438,291	1,846,689
10	1,711,410	342,282	1,346,880	4,042,566	402,032	1,824,483
11	1,693,700	338,740	1,346,880	4,050,646	404,257	1,835,822
12	1,253,745	250,749	1,346,880	3,706,762	405,065	1,814,632

Payments are made in every subsequent five years according to the years 8 to 12. 20 per cent of the list price is paid on purchase. The balance is paid in 5 equal instalments, with interest at 10 per cent per annum paid on the outstanding balance. All equipment is sold 5 years after purchase and has a trade-in value 15 per cent of purchase price.

Appendix Table 8. Capital Made Available for "Second Generation" Projects by Adopting Large Scale instead of Small Scale Padi-Growing (Unit:'000 \$)

Year	Alternative B		
	Alternative A Capital Requirements	Capital Requirements for Padi	Capital Available for "Second Generation" Projects (1-2)
	1	2	3
1		3,190	
2	7,143	7,246	-103
3	7,438	1,333	6,105
4	7,501	105	7,396
5	6,292	-3,305	9,597
6	6,130	-10,381	16,511
7	2,079	-16,585	18,664

Appendix Table 10. Labour Requirements for Alternatives A and B for Alternative B with "Second Generation" Projects

Year	Mandays/Acre of Rubber/Annum by Year of Planting	Alternative A ('000 Mandays)			Alternative B		
		Padi	Rubber	Total	Padi	Rubber	Total
1	-	-	-	-	-	238	238
2	-	180	160	340	-	98	98
3	-	360	386	746	10	1558	1568
4	32	540	636	1176	13	971	984
5	26	720	870	1590	17	1866	1883
6	22	900	483	1383	23	2697	2720
7	39	1080	424	1504	26	3038	3064
8	48	1140	546	1686	"	2067	2093
9	64	"	566	1706	"	2259	2285
10	69	"	708	1848	"	2706	2732
11	70	"	955	2095	"	3166	3192
12	76	"	1136	2276	"	3710	3736
13	78	"	1294	2534	"	4525	4551
14	80	"	1363	2503	"	5189	5215
15	87	"	1418	2558	"	5679	5705
16	91	"	1494	2634	"	5958	5984
17	123	"	1556	2693	"	6352	6378
18	108	"	1692	2832	"	6592	6618
19	104	"	1863	3003	"	7402	7428
20	95	"	2015	3155	"	7421	7447
21	89	"	2115	3255	"	8068	8094
22	102	"	1938	3078	"	8280	8306
23	91	"	1858	2998	"	8388	8414
24	87	"	1789	2929	"	8083	8109
25	80	"	1773	2913	"	7551	7577
26	77	"	1768	2908	"	7392	7418
27	80	"	1633	2773	"	7165	7191
28	69	"	1557	2697	"	7040	7066
29	67	"	1480	2620	"	6674	6700
30	64	"	1429	2569	"	6212	6238
31	58	"	1370	2510	"	5990	6016
32	58	"	1257	2397	"	5721	5747
33	70	"	1202	2341	"	5464	5490

Appendix Table 11. Value Added, Alternatives A and B

Year	Per Acre of Smallholder Rubber by Year of Planting			Total Value Added, Padi and Rubber	
	Materials purchased \$	Gross output \$	Value added \$	Alternative A \$ 000	Alternative B \$ 000
1	12		-12		-36
2	94		-94	-24	-280
3	81		-81	2356	4623
4	101		-101	4574	5311
5	86		-86	6602	8768
6	86		-86	8648	10563
7	45	253	208	11271	14801
8	45	386	341	14401	13248
9	45	491	446	16812	19679
10	45	554	509	19318	22926
11	45	572	527	22720	31035
12	47	660	613	24569	35239
13	47	695	648	25926	43446
14	46	730	684	26889	48951
15	46	836	790	27743	52546
16	45	897	852	28911	56302
17	78	1389	1311	29920	60781
18	72	1173	1101	31974	63974
19	72	1111	1039	34504	75321
20	67	972	905	36728	74172
21	65	895	830	38165	82518
22	70	1080	1010	35637	77677
23	65	926	861	34459	83087
24	63	864	801	33493	79622
25	62	756	694	33332	74468
26	61	710	649	33244	73433
27	61	772	711	31323	67238
28	58	617	559	30205	67965
29	58	586	528	29130	64099
30	56	540	484	28517	59294
31	55	463	408	27827	57079
32	55	463	408	26249	52511
33	56	525	469	25464	51737

Appendix Table 11. Explanatory Notes

1. Smallholder rubber, materials purchased : As in Lim Seu Ching and Chong Kow Ming, "Merits of estate participation and incentive wage system in public sector land development", *Kajian Ekonomi Malaysia*, Vol.XI No.1. An additional \$12 of "miscellaneous costs" in Lim and Chong are assumed to be in respect of purchased materials.
2. Value added, smallholder padi : Gross output less cost of seed, fertilizers and insecticides, \$68/acre. (Page 5. above)
3. Value added, mechanised padi : Gross output less cost of materials, fuel, machinery purchases (including interest on outstanding debt), and half the cost of machinery maintenance.
4. Value added by rubber in any year (VAR) : The value added per acre of smallholder rubber in any year, *i*, (values 1 to 33) is rr_i , and is given in Column 3. Recalling the rubber planting schedules as :

Year.	Alternative A (acres)	Alternative B (acres)
1		2975
2	2000	
3	4000	19031
4	6000	3103
5	7000	18219
6		17306
7		19227

VAR_{*i*} (the total value added by rubber in year *i*) is for Alternative A :
 $\$ 1,000 (2nr_{i-1} + 4nr_{i-2} + 6nr_{i-3} + 7nr_{i-4})$
 and for Alternative B :
 $\$ 1,000 (2.98nr_{i-1} + 19.0nr_{i-2} + 3.1nr_{i-3} + 18.2nr_{i-4} + 17.3nr_{i-5} + 19.2nr_{i-6})$

Guidelines for Agricultural Mechanization in Northern Thailand



by
A. G. Rijk
Agricultural Engineer
Hill Agriculture Development Project
Project Nepal 73/004, UNDP/FAO
Kathmandu, Nepal

Introduction

Northern Thailand in this article covers the eight provinces of Chiang Mai, Chiang Rai, Lamphoon, Lampang, Phrae, Nan, Mae Hong Son and Tak. The total area is about 65.6 million rai* (105,093 square kilometres) which can be divided into three main land forms: 40 million rai of highlands, 19.8 million rai of Uplands and 5.8 million rai of lowlands. About 1.6 million rai are at present under irrigation (2). Single cropping is commonly practised in the area. The total population in 1973 was 4,158,855 (3). The climate is tropical wet and dry. The rainy season starts normally in the middle of May and ends at the end of October. The average annual rainfall ranges from 950 to 2,000 mm in the lowlands and uplands. About 85% of the total precipitation falls during the rainy season. The temperature regime is suited for crop growth throughout the year with favourable conditions for cultivation of some temperate crops in the cool and dry season. A growing group of farmers practice the slash-and-burn technology (shifting cultivation).

These farmers are non-Thai ethnic groups and an increasingly large number of Thai who are forced into the hills by population pressure in the valleys. The number of the non-Thai hill dwellers is estimated at about 400,000.

The Present Situation

The northern Thai farmers are facing at least one of the following problems (4):

- their farm size is too small to support their family;
- there is lack of sufficient irrigation water;
- there is a need for cheap and easily obtainable credits;
- although the individual farmer has labour peaks certain periods, in general, there is a lack of productive employment possibilities.

There is a fairly large number of farmers with less than 10 rai**.

Especially those small farmers who are mono-cropping (mainly due to lack of irrigation water) are living on a subsistence level. There are even many farmers who have to buy supplementary

food to feed their family. Subsistence farming means often (also due to lack of sufficient job opportunities outside their own farm) lack of cash income. Lack of sufficient cash income makes it impossible to apply improved farm inputs which are necessary for a more productive form of agriculture. Higher price for agricultural products by-pass the subsistence farmer also because he is not producing for a market. This means that in the process of agricultural modernisation the subsistence farmer is most likely to become landless. As the following paragraph will show, it is not yet likely that these landless farmers will be able to find other productive job opportunities in (Northern) Thailand.

Although it is not easy to find exact figures about under-employment in Thailand, the problem is already well recognised. The prevailing mono-cropping system is mainly responsible for this. Seasonal fluctuations are very high and about 25% of the

* 1 rai = 1600m²

** A survey shows that in the Chiang Mai Valley 2.2% of the farm households have less than 5 rai of land while 64.7% had less than 10 rai (5).

Table 1 Seasonal Rural Employment Pattern in Purely Agricultural Activity by Regions

Month	Percentage of agricultural labour force without work or fully employed					
	Northeast (1968)		North (1969)		South (1970)	
	(a)*	(b)**	(a)*	(b)**	(a)*	(b)**
June	13.9	14.0	11.4	17.4	8.1	27.6
July	10.1	11.5	8.1	16.4	5.4	18.2
August	9.6	12.7	14.8	20.7	5.2	16.7
September	16.6	14.9	24.3	32.7	4.2	22.1
October	25.8	16.8	27.6	32.7	7.2	29.8
November	14.9	12.8	18.8	20.5	16.9	30.6
December	8.7	10.4	10.0	15.9	22.1	36.9
January	15.6	14.2	16.8	19.5	17.5	34.4
February	38.2	20.4	32.7	25.1	7.7	20.9
March	48.3	15.6	49.2	24.7	4.7	24.5
April	47.5	16.3	51.7	21.2	16.7	39.4
May	9.3	12.7	30.4	24.3	9.7	39.0
Average	21.5	14.4	24.7	22.6	10.5	28.3

*(a) = no work ***(b) = not fully employed

Source : Fuhs, F. W. and J. Vingerhoets; "Rural Manpower, Rural Institutions and Rural Employment in Thailand"; Manpower Planning Division; National Economic Development Board; Government of Thailand; 1972.

working time available during the year is not utilized as is shown in **Table 1**.

There might be temporary shortages locally but this seems to be more a problem of labour mobility than of absolute shortages. The unsatisfactory employment situation in (Northern) Thailand will become worse because the labour force is assumed to double in the next 25 years. Industrialisation will not absorb the expected increase of labour force of 400,000 labourers per year. The industrial sector and services absorbed only 34% of the increased labour force from 1960-1969(6). This means that most of the additional workers will have to find productive employment in agriculture. The above explained situation asks for an employment creating development strategy because unused labour forces are not only a loss for the nation but for the people concerned, it means no income and poverty which may cause social unrest. However, increasing employment without regard to its productivity is a wrong approach. Agricultural mechanization is an important possibility to improve the productivity of the labour force.

The population growth in Northern Thailand is estimated at about 2.5%-3%. This creates

an increasing population pressure on the already overpopulated lowlands. Increase in land productivity as a result of construction of irrigation works and the introduction of better farming techniques and new technology is certainly possible. However, to feed and employ the increasing population the opening up of new farm land will also be necessary. Northern Thailand has the possibility to expand its agricultural area by developing uplands since the uplands make up about 30% of total area of Northern Thailand and represents areas with suitable slopes and accessibility for agriculture.

The previously explained situation in Northern Thailand asks for a low-cost type of mechanization which increases the agricultural production, creates more employment and improves labour productivity. Different types of mechanization will be needed for wet land and dry land farming.

Some Aspects of Mechanization, Labour Expenditure and New Agricultural Technology

Impact of Mechanization on Crop Yield

Farmers and farm management economists are interested in fac-



Fig.1 Demonstration and Research Farm of NADC for improved upland farm practices. After construction of terraces upland rice is planted on ridges.

tual and quantitative data on differences in yield that can be expected if farm operations are done with mechanical power and suitable implements, instead of being carried out by hand or animal power with traditional tools and implements.

Quantitative data of the effects of mechanization on yield can be obtained from field experiments at agricultural research stations, or by measuring yields on fields managed by farmers using either mechanical or traditional methods. Data obtained from farmers' fields are often not comparable because farmers who can afford mechanization may also use more fertilizer, pesticides, insecticides and better seeds than farmers who have only traditional power sources and implements.

In the past, several studies on both research stations and farmers' fields have been carried out in other countries and regions than Northern Thailand. Investigation of these studies led to the conclusion that there is little evidence that the mere substitution of animal power by mechanical power in farm operations can effect a significant increase in crop yields (7). For instance, it is often assumed that the deeper ploughing of tractors is an important explanatory factor for higher yields but several studies have shown that deeper ploughing may also decrease yield.

The availability of mechanical power for high rates of appli-

cation enables the farmers to use time-tight multiple cropping systems. These multiple cropping systems can result in increased annual production per unit of land area. The same situation might appear by using mechanical power for irrigation purposes. But using more efficient hand-tools, more animal power, introduction of animal-drawn equipment and other cultural practices might give the same result.

One has to be very careful to describe merely or even partly higher yields as the result of tractorization. A mathematical correlation does not have to be casual. A poorly carried out investigation is able to show that a certain type of mechanization results in higher yields while in fact the reverse is true; higher yields result in mechanization.

Higher yields are certainly not achieved by mechanical power only: fertilizer, insecticides, improved animal-drawn equipment or other new farm practices will result in higher yield, probably against lower social costs and with lower initial cash requirements.

Impact of Labour Expenditure on Crop Yield

The assumption that there is a relation between labour expenditure and crop yield is acceptable. The farm management economist is interested in the yield increase as a result of the labour increase for different farm jobs (marginal labour productivity). However, it is difficult to quantify this relation. For example, the labour productivity of fertilizing is influenced by the amount and type of fertilizer, the timing of application and the water supply afterwards. The higher yield is often not only the result of labour input but also of management. A certain labour input for a specific task will also affect the labour input later on. For example, fertilizing does not

Table 2 Relationship between Yield and Labour Expenditure on various crops in Sansai (Chiang Mai Province, Northern Thailand)

	N=Sample size	Low yield	Medium yield	High yield
Early rice crop:	N=12		N=28	N=16
Mean yield (buckets/rai)		30.6	46.8	66.8
Total mandays/rai		21.71	23.19	28.48
Late rice crop:	N=25		N=46	N=22
Mean yield (buckets/rai)		12.3	26.0	48.2
Total mandays/rai		20.55	21.98	23.88
		Low input	Medium input	High input
Carlio crop:	N=31		N=36	N=15
Mean yield (kg/rai)		418	759	1440
Total mandays/rai		53.6	61.04	80.14
Watermelon crop:	N=20		N=15	N=6
Mean yield (fruits/rai)		631	1190	2110
Total mandays/rai		55.36	61.05	65.51

Source: Calavan, M. M. "Decision against nature: Crop choice in a Northern Thai village"; Ph. D. Anthropology; University of Illinois at Urbana-Champaign; 1974.

Note: The source specifies the labour expenditure for the various tasks per crop.

only ask for labour to apply the fertilizer but as a result of the higher yield, it will also affect the labour needed for harvest, threshing and transport. Table 2 shows the relationship between yield and labour expenditure on some crops in Northern Thailand.

Impact of New Agricultural Technology on Employment

The gloomy employment situation in Northern Thailand should raise question whether improved or new agricultural technology will increase or decrease the employment possibilities. The most important ingredients of improved agricultural technology are cropping intensity, high yielding varieties, use of fertilizers, insecticides, pesticides and farm mechanization.

Intensive agriculture (multiple cropping and relay cropping) has

high potential for providing employment and increase of land productivity in Northern Thailand. The results of a Linear Programming model to derive optimal multiple cropping systems for the Chiang Mai Valley shows in table 3 the employment potentials for several systems.

In estigations of studies on mechanization shows that tractorization influences the employment of farm labour negatively as is shown in table 4.

It is likely that mono-cropping rice farms in Thailand can also employ more labour. Transplanted paddy farming in Japan requires 22.5 man-days per rai. The difference between the figures in table 4 and Japan is mainly a result of different inputs for weeding, fertilizing and water control (8).

Sometimes studies show that tractorization can create more

Table 3 Employment Potentials for Several Multiple Cropping Systems

Farm size 10 rai Cropping System	Family Labour				Labour bought	
	Used on Farm		Sold off Farm		Stor- able Crops	Vege- table Model
(Crops/year)	Storable Crops	Vegetable Model	Storable Crops	Vegetable Model		
2 Crop Budgeted**	131	160	169	140	2	3
2 Crop Optimal	190	220	110	80	17	11
2.5 Crop Optimal	214	242	86	58	34	46
3. Crop Optimal	240	263	60	37	29	80
Unlimited	240	277	60	23	29	119

* One man-year(100) equals 313 working days or 2,191 working hours.

** Currently common rice-soybean cropping system.

Source: Alan R. Thodey and Rapeepun Sektheera, "Optimal Multiple Cropping Systems for the Chiang Mai Valley" Agricultural Economics Report No.1; Chiang Mai University; Thailand; July 1969.

Table 4 Labour Requirements for Rice Growing by Operation and Type of Technique (Man-days per Rai)

Operation	Type of farming techniques*			
	TB	TT	BB	BT
Land preparation(including nursery)	4.5	1.5	3.0	0.5
Sowing/planting	3.5	3.5	0.25	
Care	1.5	1.5	1.0	1.0
Harvesting and threshing	4.5	4.0	4.5	4.0
	14.0	10.5	8.75	5.5

TB=Transplanting with buffalo farmings;
 TT=Transplanting with tractor farmings.
 BB=Broadcasting with buffalo farming;
 BT=Broadcasting with tractor farmings;

Source : NEDECO: Project of land consolidation: Phase I (Bangkok, Royal Irrigation Department); Singburi Province; Central Plain; 1968.

employment opportunities but whether the use of tractors will increase labour requirements or not depends on the possibility of using new farming techniques. Suppose the farmer is preparing his field by buffalo which results is not enough time left for transplanting. By tractor tillage, he is able to change from broadcasting into transplanting. Table 4 shows that this will increase his labour input with 1.75 man-days rai (20%). Therefore, tractorization results in an increase of labour utilisation because a change of growing technique is possible. However, the real problem in this example is the limited amount of available buffaloes. If sufficient buffaloes were available, the timing problem would not occur and transplanting would be possible. This would increase the labour input by 5.25 mandays/rai (60%) or three times more than tractorization does. This example should emphasize that tractorization might increase employment opportunities if compared with traditional farming practices but intermediate types of mechanization might result in a higher increase.

With the introduction of new agricultural technology it must be avoided that the large farms are intensifying their operation by large scale mechanization which results in a decline of agricultural labour employment.

Agricultural Mechanization as a Complementary Input

In order to raise the land productivity in Northern Thailand, modern agricultural production methods are necessary. For this reason, there will be a need for increased power input and improved agricultural tools and equipment complementary to, for instance, multiple cropping technology. However, reasons for mechanization should be studied carefully. Not always is mechanization the best and only solution. The following examples may explain this:

- A classic argument about the introduction of tractors is that the soil is often too hard after the dry season for animal tillage. However, in East Africa, introduction of a mulch-type fallow tillage, which could be carried out by animal traction, proved to be a more appropriate solution than the introduction of tractors (9).
- Labour peaks do not necessarily have to be removed by mechanization. Using varieties with different planting and harvesting times might be a solution as well as a varied cropping pattern. The cultural practice also affects the labour input. Wider spacing will decrease the labour input during planting, weeding and harvesting while the yield does not necessarily have to decrease and might even increase.
- Introduction of different types of animal-drawn equipment can also speed up farm operations. The only animal-drawn equipment available in Northern Thailand is the paddy field plough and comb narrow. Farmers do not know of the existence of animal-drawn equipment such as disc harrows, cultivators, peed drills, and inter-row cultivators.

Guidelines for Realistic Choices for Northern Thailand

The economy of Northern Thailand is based on agriculture and the Government is aiming to improve the level of living of its rural population. It is clear that because of the high rate of under-employment, sophisticated capital intensive western-type mechanization is not appropriate because this type of mechanization is designed mainly to replace expensive human labour. The 5-year plans of the Royal Thai Government mention job creation as an important task and therefore emphasis should be given on a labour-intensive development policy. To solve the problems of labour surplus regions, there is a need for a specific mechanization pattern which is adjusted to the local problems and which fits the socio-economic and agricultural needs of Northern Thailand. Besides that, for a highly sophisticated mechanization programme there is a need for credit, dealers, spare parts' supply, mechanics and skilled operators and it is not likely that this can be acquired quickly in the northern rural areas. There is also the question of "Who gets the Benefits?". The costs of imported equipment (depreciation) are exported as income to factories in the developed countries, but wages paid to local labourers are spent on locally-produced items which have a positive effect on the national economy.

As explained previously, the mechanization pattern adopted should aim to maximize the productive labour absorption capacity of agriculture and to improve productivity. Especially improved handtools, animal-drawn equipment and 2-wheel tractors can meet these goals. Any form of mechanization which is aiming to displace human labour should be avoided.

A recent survey of buffaloes in Thailand shows that the buffalo

Table 5 Working Periods of Thai Buffaloes

Zone	Months Worked per year		Days worked per month												Total days per year
	Range	Average	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
North	2-8	3.3	0	1.1	0.9	0.7	4.3	17.3	19.3	16.1	1.8	2.9	0.7	1.1	66.1
Korat	4-12	5.6	3.9	3.9	3.9	3.9	15.2	25.2	25.9	28.3	15.0	3.9	3.9	3.9	
Tha Pra-Udom-Ubol	1-12	5.3	0.9	0.8	2.2	3.5	22.3	25.2	26.7	26.9	20.7	6.3	1.9	0.9	138.3
Central Plain and southeast	3-10	7.9	10.3	7.8	3.0	4.1	17.4	22.8	22.2	21.8	11.3	8.8	6.6	10.0	146.1
Average	—	5.5	3.8	3.4	2.5	3.0	14.8	22.6	23.7	23.3	12.2	5.5	3.3	4.0	122

Source: Ros Cockrill, W. (editor), *The Husbandry and Health of the Domestic Buffalo*. FAO Rome, 1974, pp. 317.

is far from being employed to its fullest capacity (Table 5). The same situation exists for most of the cattle. The main reason for this is the mono-cropping of paddy: the animal are only used for preparation of the paddy fields and left idle for the rest of the year.

The tillage of permanent upland fields is mainly done by tractor contractors and hardly any animals are used for this purpose. The main reason for this seems to be that suitable animal-drawn equipment for soil tillage, seeding and inter-row tillage have not been introduced. Introduction of animal powered water lifting devices would employ the animal also during the growing season. The manure could be used for gas production in family size biogas plants to reduce the need for fire wood for cooking.

It is interesting to note that the much-needed animal-drawn equipment and handtools are easy to fabricate in small workshops without the need for complicated technology and big investment. The production of these locally-made tools and equipment is of great importance for the de-

velopment of small-scale decentralised labour-intensive industry in Northern Thailand.

The improvement of the employment possibilities in Northern Thailand should not only be labour-intensive farming techniques. Rural employment programmes should also be strated on land clearing, road construction, terrace-making, construction of irrigation systems and other rural construction activities especially during the agricultural off-season. Often this work is carried out with expensive imported equipment. The operation of, for instance, a medium size bulldozer with equipment costs at least 500 Baht per hour while a labourer earns about 2.5 Baht per hour. This means that 200 labourers could be hired for the same amount of money. If the bulldozer does the job for a cheaper market price it should be clear that rural employment programmes should be judged by real costs for society. Even if labour intensive programmes results in higher real costs but create more employment (and hence income for low income groups), these higher real costs

might be worthwhile to improve income distribution and social equity.

In a report by the Manpower Planning Division of the National Economic Development Board (NEDB), recommendations have been made to ensure maximum employment in the rural areas for the fast growing labour force. Recommendations directly concerning agricultural mechanization on are (6):

- design and implement a selective farm mechanization policy geared to the system of small peasant farmers who are naturally inclined to be very selective in their choice of mechanized farm equipment;
- put heavy import duties on the import of farm machinery which is not suited for the development of a labour-intensive peasant agriculture;
- create a central agency dealing with farm mechanization, possibly through a merger of the Rice Engineering and the Farm Machinery Division."

These (and nearly all of the other) recommendations of the above mentioned report are applicable to Northern Thailand and should get full consideration for implementation.

A study on labour-intensive road construction in Chiang Mai province shows that labour-intensive and/or intermediate methods used in the construction of a typical gravel feeder road are technically close to being socially feasible. If such methods were adopted, approximately 90,000



Fig.2 Thai-made Diesel Tractor with PTO and Hydraulic Lift built from used truck components.



Fig.3 Construction of 2-wheel tractor (so called "Iron Buffalo") in Central Thailand.

more man-hours of unskilled labour per kilometer road construction would be required (10). The study will be even more valid now since fuel prices have more than tripled and also equipment prices have been raised considerably. The "Fang River Catchment Development Project" in Chiang Mai province is carried out as a labour-intensive project. Experiences and findings from this project should be evaluated carefully and be used for other labour-intensive projects. To improve the productivity of unskilled labour, appropriate handtools, good management and supervision, good nutrition and payment in a piece rate have proved to be very effective.

REFERENCES

1) Krui Panayasingh, "Role and

Responsibilities of the Northern Region Agricultural Development Centre (NADC)", Chiang Mai, 19 May 1976.
 2) NADC National Resources Branch, Internal Memorandum, Chiang Mai, 14 June 1976.
 3) National Statistical Office, Royal Thai Government, Bangkok, 1973.
 4) Rijk, A.G., "Orientation Survey on Employment and Mechanization in the Northern Region", Internal Report, NADC, Chiang Mai, 7 December 1976.
 5) Benchavan Tongsiri, Pichit Lerittamrab and Alan R. Thodey, "Agro-Economic Characteristics of the Chiang Mai Valley, 1972-73", Agro. Ec. Report No. 5, Chiang Mai University, Thailand, January 1975.
 6) Fuhs, F.W. and J. Vingerhoets, "Rural Manpower, Rural Institutions and Rural Employment in Thailand", Manpower Planning Division, National Economic Development Board, Government of Thailand, Bangkok,

1972.
 7) Rijk, A.G., "Policy aspects of Employment and Agricultural Mechanization for the Northern Region of Thailand", Internal Paper, NADC, Chiang Mai, December 1976.
 8) Inukai, I., "Farm Mechanization, Output and Labour Input: A case study in Thailand", International Labour Review, May 1970, pp. 453-473.
 9) Mc Robie, G. "An approach for appropriate technologists", Lectures on socially appropriate technology, Committee for International Cooperation Activities, Technische Hogeschool, Eindhoven, The Netherlands, 1974.
 10) Mc Cleary, W.A., et al. "Equipment Versus Employment", International Labour Organisation, Geneva, 1976, pp. 87-92. ■■

INDEX TO ADVERTIZERS

EIMA.....	98	Ochiai Hamono Kogyo Co., Ltd.	54
Hasebe Co., Ltd.	97	Ohtake Mfg. Co., Ltd.	98
Iseki & Co., Ltd.	2	Sasaki Noki Co., Ltd.	51
Kaneko Agricultural Machinery Co., Ltd.	4	Satake Engineering Co., Ltd.	52
Kett Electric Laboratory	100	Satoh Agricultural Machine Mfg. Co., Ltd.	6
Kyodo Seiko Co., Ltd.	100	Shiroishi Koki Co., Ltd.	99
Mametora Agricultural Machinery Co., Ltd.	102	Sumitomo Chemical Co., Ltd.	101
Matsuyama Plow Mfg. Co., Ltd.	99		

Demand for and Marketing of Domestically Produced Small Farm Tractors in Thailand



by
Ungthip Chinapant
Second Year Student (Doctoral Course)
Department of Farm Management
Faculty of Agriculture
Kyoto University
Oiwake-cho, Kitashirakawa, Sakyo-ku,
Kyoto, Japan

Introduction

Prior to 1950, the use of farm tractors in Thailand was almost unknown. Farmers relied upon human labor, animal power and a few simple tools. After 1951, farm machines such as tractors and harvesters were introduced into Thailand for use at experiment stations, but these machines did not generate much public interest at that time. Not until almost a decade after the second World War did farm mechanization become better known to farmers. More tractors were bought for private use as well as for hire, but only a limited number of farmers could afford to buy them. Starting from near zero in 1950, the farm tractor population in Thailand rose to 17,500 units of the four-wheeled tractor and 2,040 units of the two-wheeled tractor in 1967.¹

Since there was no local manufacturer in Thailand during this early period, and even though some local manufacturers emerged later, there is no legal record of the production. Imports alone reflected the market for tractors. Examination of Thailand's import statistics

Table 1. Lists of leading Thai imports of farm tractors, farm equipments and parts.

Company	Brand
Anglo-Thai	Ford
Louis T. Leonovens	Massey Ferguson
Mechanical Equipment Co. Ltd.	International Harvester
John Deere Thailand Ltd.	John Deere
Ua Withaya Phanit Co. Ltd.	Nuffield
Yip In Tsoi & Jacks Ltd.	David Brown
Bara Windson Co. Ltd.	Hanomag
CKR Motors Ltd.	Case
Minsen Co. Ltd.	Zetor
Minsen Machinery Co. Ltd.	M. T. Kubota
Thai Machinery Industry Co. Ltd.	Steyr
The Mechanized Equipment Co. Ltd.	Valmet
Young Teng Sue Co. Ltd.	B. M. Volvo
Asian Honda Motor Co. Ltd.	Honda
Nichimen Co. Ltd.	Yanmar
Nakorn Luang Motor Co.	Iseki
Bangkok Motor Works	KOMatsu
Bangkok United Mechanical	Mitsubishi, Hitachi

Source : Survey 1968 (1, p3)

therefore was made as the first step in the market evaluation. The lists of leading tractor importers are given in Table 1. Tractor import statistics by the Customs Department show that farm tractor imports gradually increased from 1963, reached a peak in 1967, and have declined since² (Table 2). The decline in tractor importation is possible because the Thai farmers have substituted the small local tractors for the expensive imported one. The small locally manufactured tractors are also called "power tillers". So far we can conclude that the small tractors are most suited for the paddy

Table 2. Imported tractors (1963-1972)

Year	Amount	Value(baht)
1963	2,247	194,227,197
1964	3,864	283,660,136
1965	5,200	322,419,302
1966	4,577	408,317,130
1967	5,698	567,607,388
1968	5,104	477,713,352
1969	3,631	326,738,986
1970	2,305	314,075,816
1971	2,662	359,272,414
1972	1,809	289,074,652
Total	37,097	3,543,106,273

Source : Custom Department.

farm, and the use of mechanized equipment in rice farming is now increasing and spreading rapidly.

Like most of the Southeast Asian countries, Thailand has attempted to become more developed, especially in the way of production technology. Until now

agricultural products have played a significant role in the Thai economy. Thai farmers, the "back-bone" of the country, are regarded as the people in the low income group. The reasons for low income are numerous, but the relevant evidence is basically low yield and under utilization of resources. To provide a better standard of living for the rural population, it is necessary to increase farm income and productivity of land and labor. In rice cultivation, double cropping techniques have been introduced. They can be more successful perhaps if the conventional farming practices were replaced by improved technology.

In reality, although the introduction of agricultural mechanization provides many good prospects for farm development, there are also many problems. It offers a greater production output and reduces human drudgery. However, if the market cannot absorb the increase in output, and the labor displaced by mechanization cannot find employment elsewhere, then the condition of agriculture is not really improved. Moreover, when machinery has to be imported, problems may be that the machines are too complicated and costly. The way to increase the adoption of agriculture machinery is to assure the farmers that the new technical equipment can provide them with a high income. Recent advances in plant breeding have demonstrated that it is possible to raise the crop yield significantly. The rise in the income of farmers who have adopted new varieties has stimulated the employment of the farm machinery even further.

Review of Literature

A field survey of the market for farm machineries in Thailand was conducted throughout all

regions of Thailand by a working team from five Thai government agencies in 1968. The survey interviewed 323 custom service operators, farmers, equipment dealers, importers, manufacturers and assemblers. The equipment owners and operators interviewed were selected on a random basis in predetermined provinces to represent the varying agricultural production and practices in all regions. The study divided Thailand into 10 regions and focused on primary sources of mechanical farm power tractors and related auxiliary equipment. There are as many as 27 different brands of farm tractors, imported from 22 countries.

Based on the survey, farm mechanization has grown significantly since 1963. Almost 15 percent of the farm households in Thailand used mechanical power of some sort. It was estimated that tractors were used on over half the paddy fields in the central plains, East and South regions. Tractor use was estimated to reach 80 percent in the Bangkok Metropolitan area. Tractor use in other regions for rice production was found to be small and lowest in East-Northeast where it was estimated to be only 3 percent. The use of tractors expanded farm productivity and was lower in unit cost than hand labor and draft animals. The hourly land tilling capacity of tractors was a minimum of 24 times that of farm labor and draft animals in paddy fields and a minimum of 36 times higher in upland farming. The cost of farm tractor services, according to the study, was found to be lower than the cost of hiring farm labor and draft animals.

Scope and Objectives

The overall objectives of this paper are to describe and analyze

the marketing of small farm tractors that are produced in Thailand. Marketing is used in the broad sense; namely, all aspects of the movement of products from the producers to the final consumers. In this case, the producers are the firms which manufacture the small two-wheel and four-wheel tractors in Thailand, and the consumers are the Thai farmers who purchase these tractors.

Procedure

The general procedure followed in this study is that of tracing the marketing channels for small tractors from two directions; namely, from producers to farmers and then from farmers back to the producing firms. The research started with a survey of all firms in the Central Plain. Some firms then deliberately selected for studying the firm-to-farmer links. Then two rice producing areas, Supanburi and Chacheongsao, were selected for studying the farmer-to-firm links.

Marketing of Small Tractors from the Viewpoint of Firm

The Initial Industry-Wide Survey

In order to conduct a sample survey of the farm machinery manufacturing firms for her research, Waranya Rewan³ spent considerable time and effort in constructing a consolidated list frame. Names and addresses of firms were obtained from the following four sources: Division of Factory Control; Ministry of Industry Department of Labor; Ministry of Interior; Division of Commercial Registration, Ministry of Commerce and Division of Agricultural Engineering, Ministry of Agriculture and Cooperatives.

These government offices keep the lists of these firms for various reasons, such as requirements for factory registration, labor law enforcement, etc. Thousands of names were listed, hence each list which was thought to be somehow associated with production of agricultural machines had to be inspected.

The lists were re-examined and a final list frame was prepared. About 270 firms in 26 provinces in the Central Region were thought to be manufacturing agricultural implements, but field investigation showed that the list was inaccurate. Hence the procedure changed to using informants consisting of managers of the firms themselves, plus knowledgeable local officials, to help in searching out the firms. The following are the main conclusions.

First, firms in the industry were classified into 2 types :

1. General repair shops. These are small firms generally employing less than 10 workers. Their main business is repairing, components and produce complete machine on order although not more than 10 units per year.

2. Manufacturing firms. They employ more than 10 workers, but usually not more than 60. Their main business is the manufacture of farm machineries and they do not have to wait for orders before starting production. They also produce more than one kind of machinery.

This study concentrated on type-2 firms which represent the early stages of the development

Table 3. Distribution of firms surveyed in 9 provinces (1973)

Province	Number of Firms
Ayudhaya	3
Chacheong-sao	8
Chonburi	1
Lopburi	2
Metropolis	3
Nakorn-Sawan	3
Patum-Thani	1
Ratburi	1
Saraburi	4
Total	26

of an industry with potentially great importance to agriculture. The lists of the 26 firms are shown in Table 3.

Second, most of the 26 firms are located in the major changwad towns (Ampur Muang) or in an ampur nearby. Only a few firms were owned by the indigenous Thai. Most were owned by Chinese-Thai families. The firms had usually been in business for 8 to 10 years.

Third, the products manufactured by type-2 firms are as follows : (rank from highest to lowest in terms of number produced). four-wheeled tractor (small) two-wheeled tractor (small) disc plow (for big tractor) mold board plow (for big tractor) corn sheller, sorghum thresher hay and grass mower (for big tractor) seed cleaner rice mill (small) other equipment for big tractor' such as dozer blade.

Selection of Firms for Further Study

The result of the first round survey led to the decision to concentrate further on two products : the small two-wheeled and four-wheeled tractors. This decision was made because these products are potentially of great importance to the typical Thai rice farmer. The price of small tractors is within reach of most rice farmers, whereas the big tractors are more suited for custom work and ownership by large wealthy farmers.

Out of the 26 firms found in the survey, 6 were selected as representative firms for the purpose of this study. There were two large firms (50-55 workers), 2 medium firms (30-35 worker) and 2 small firms (10-15 workers). The classification and selection was based on the relative size of firms and their co-operation. The data collected were not relevant in some cases and hence further

adjustments were made.

Characteristics of Firms

It is interesting to note that among the 26 firms which were interviewed in 10 provinces in the Central plain, almost all of them sold tractors to Supanburi. On the other hand, the tractor producing firm in Supanburi was of no significance to the market sales in that area.

The farm tractor market in Chachoengsao is much larger. A special characteristic of the firms is that they produce only two-wheel tractors and low-lift irrigation pumps. All of the firms are of small size and their sales are directed mainly to the local farmers, although some also sell to other provinces. There is a tractor implement manufacturing firm which is also a dealer in large imported tractors.

Market Structure

There is no monopoly market for tractors in Thailand. No single firm has reached a size large enough to achieve economies of scale. The comparative costs are similar among firms¹. The machine tools used are different only in quantity, not in type. Only one firm in Chonburi used a hydraulic pump which is more expensive and more efficient than the ordinary type. However, the production of this firm is focused on oil refinery machinery rather than tractor. Some have special tools, such as the sprocket-wheeled cutter. The firm can supply their own sprocket wheels which are important parts of the farm tractor. During the slack months (May to August) of tractor sales, they can rely upon the production of sprocket wheels to keep their labor force busy.

Most farm tractor firms have been in existence for only 2 or 3 years. They started as automo-

bile or bicycle mechanical repair shops. A tractor produced by this kind of shop will be similar in price to one produced by a real manufacturing firm. Some customers prefer the home workshop type as it is nearby, a breakdown in the machine can be easily and conveniently repaired by the local manufacturer.

Due to their recent establishment and financial constraint on the firms, the scale of production has become small (a few thousand two-wheel and about 500 units of four-wheel tractors per annum). Most of the partnership types are for tax reduction and exemption purposes rather than for capital expansion. The firm owners do everything from administration, machine designing, sale promotion to the manual labor. The survey found none of the firms had any branches except for the separation of business between brothers to form a new business.

Employment

From the study of 6 representative firms in 4 provinces, the number of workers employed ranged from 11 to 55 and daily wage-rate ranged from a maximum of 60 baht to a minimum of 5 baht (Table 4). The firms, ex-

Table 4. Daily wage rate paid by small tractor producing firms

Firm	Number of employees			Wage-rate	
	Male	Female	Total	Max	Min
1.	55	—	55	60	—
2.	54	—	54	50	—
3.	35	—	35	50	15
4.	30	—	30	60	15
5.	12	—	12	40	20
6.	11	—	11	50	5

Source : Survey(1973).

cept for firm 4, provided lodging for the workers. The working time was an average of 8 hours per day, 6 days a week. The wage was paid every two weeks.

Usually the workers had been trained within the firm itself. The skilled workers who received higher wages were not graduates of any vocational school but started

out as apprentices of the firms and gained their skills on the job. The firms preferred to train their own workers as they were more available and the relationship between the employee was well established. The workers were from local or nearby regions.

Dealer Networks and Direct Sales

The market for farm tractors has made rapid progress in the last two years. It is interesting to note that in Ayudhaya the number of the two-wheel tractors produced has decreased whereas those of the four-wheel tractors increased. This is different from Chachoeng-sao, Samut-prakarn and Metroplis Bangkok where production is concentrated on two-wheel tractor. Of the 6 firms studied, none of them experienced any sale discrimination against the customers. They sold their products to dealers as well as to individual farmers. The customers were from everywhere. Some were local dealers or farmers, some were from other provinces, sometimes even from provinces where tractor manufacturing firms were situated. This phenomenon can be explained by the fact that some farmers are reluctant to buy a brand new tractor. They rely upon recommendation of friends or relatives who had used a tractor before.

However, the sale pattern of each firm is slightly different due to sizes and locations. If a firm is not situated in the paddy producing region, most of its sale will be directed towards dealers rather than farmers, and more so with large firms.

Credit and Cash Sales

Credit extension by the firm dealer levels depends on the individual rather than a set rule. It

depends on the capital and willingness of the seller and the trustworthiness of the buyer. Generally, there is no legal sale contract between the firms and the dealers. i. e., the business tends to resemble the Chinese commercial types, the businessmen believe in each other and the transaction is carried out by words or by some note-sheet, not for legal evidence but rather for memorandum. The general practice would be for the dealer to pay the producer for the merchandise after the next transaction is made, which means about 1 or 2 months credit. If the payment is due and the dealer cannot repay the debt, the situation will depend on personal agreement and past relationship. Businessmen will try their best not to get involved with the courts of law. In business, ethics are more important than law. However, bad debts are not unknown.

On the other hand, when credit is given to the farmers something has to be taken as collateral, usually their cultivated land, the price of the tractor or other farm machinery sold on credit is higher than the cash price. An example can be given in the case of the low-lift irrigation pump. I met a lady on the morning of my second day in Supanburi. She bought an irrigation pump which cost her 3,200 baht. She had to pay 2.5 per cent interest per month to the dealer until she made the total payment, which would be after harvest. Thus, if she paid off the loan, say, in 4 months, her total payment would be 3,200 baht principal plus 320 baht interest which would sum up to 3,520 baht. However, in the same afternoon, a gentleman came to buy exactly the same type and same brand of irrigation pump at the shop. He offered to pay cash and after the bargaining the water pump was sold for 2,800 baht.

Advertising and Foreign Import Competition

Advertising practices of the firms studied is not at all aggressive. The tractor is often demonstrated to farmers at local fairs and field days. Leaflets are distributed by a few large firms. Radio advertisements are rare, and television advertising is unknown. Most of the firms rely on their reputation, identification and the tractor display in front of their shops.

Although there is no real farm tractor manufacturing firms in Supanburi, there are a few shops and quite a few tractor dealers. Both locally produced farm tractors and imported walking tractors (Kubota) are available. The domestic and imported tractors are not homogeneous in either price or quality. The imported one looks better and is superior in quality, but the price is almost double that of the domestic tractor. Hence, the domestic model is more popular. The high price of the imported two-wheel tractor is due to its model and quality alone: not because of the distortion in the price system. The tariff rate for the two-wheel tractor is only 3 per cent, to add the cost of insurance, freight, transportation and business tax, the price was only 10 per cent higher. One importer noted the significant replacement of imported ones by domestic tractors. Chachoeng-sao was once an important market for Kubota but for the past 5 years there has been no demand for it as there are now about 8 tractor manufacturing firms there.

The imported tractor, especially the big ones with higher power (more than 50 HP), is too expensive for the typical farmers. The imported small four-wheel tractor (21 HP) is about three times more expensive than the local small four-wheel tractor (10

HP), while the price of the imported two-wheel (7 HP) is almost double that of the local counterpart.

Capital Shortage of Manufacturers and Dealers

The tractor industry in Thailand is just 5 years old. Though some firms have been engaged in the tractor business for more than 15 years, it was just an "on order" type. The producers developed from mechanical or automotive repair enterprises. At present, there are approximately 100 small scale manufacturing workshop mostly in the Central Plain region.⁵ It is noticeable that these manufacturing firms grew without any encouragement or promotion from the government. It is not surprising that some of them are deeply in debt even though their current tractor sales are high. This is because the trial-and-error experience in the early production period was expensive. However, the condition of capital soundness varies from firm to firm. Some firms can afford to extend credit to their customers while others could not but rather even have the customers pay in advance.

Demand for Small Tractors from the Viewpoint of Farmers

Why Small Tractors Sell

The price of agricultural products and the cost of farm machinery are important factors affecting development in agricultural mechanization.⁶ For example: 1973 was a good crop year and the paddy price rose sharply, coupled with an irrigation facility which allows adequate water for double cropping, hence encouraged farm mechanization. With the expectation of an even higher price of tractors

and another good crop year, demand for tractor increased even more. Some of the farmers surveyed were buying a tractor for second-crop cultivation (which starts around February). Some were not buying for an intermediate purpose, but were buying it sooner than needed as they were afraid that the tractor price would increase further (between January-March 1974, the price of the two-wheel tractor increases by approximately 10 per cent).

The price of the domestic two-wheel and four-wheel tractor varied from 4,000 to 6,000 baht and 12,050 to 16,500 baht, respectively (Table 5).

Table 5. Tractor price 6 representative firms (1973)

Firm	Two-wheeled (baht)	Four-wheeled (baht)
1.	6,200	—
2.	6,000	13,500
3.	4,200	16,500
4.	4,800	9,500
5.	5,000	—
6.	6,000	12,000

Source: Survey (1973).

The tractor seems to be popular even when double cropping is not a common practice.

It should be noted that both Supanburi and Chachoeng-sao are paddy areas and the use of tractors is wide-spread. The difference between these two provinces is the distance from the Metropolis where the opportunity for urban job exists for the labor released from farm work. Chachoeng-sao is much nearer to Bangkok and the employment of tractor is ubiquitous.

How Individual Farmers Decide to Buy Small Tractor

The need to boost output, employment and income levels in agriculture was readily apparent. The solution would be the introduction of new farm technology. The "miracle-seed" leads to higher yield, more employment and higher income level. For this reason, other inputs have to be

introduced at the same time. Whether or not the farmer can employ the new technology depends on his access to credit, the land tenure system, the availability of technical advisory services, market and distribution channels and the structure of costs and prices.⁷

Intensive cultivation is possible only if the land can be prepared in time. To prepare the land right after the first harvest by the drought power is almost impossible as the straw left over is too dry and hard. The cost of hired tractor service rose from 30 baht per rai in 1973 to 50 baht per rai in 1974. Besides the problem of a high service charge, the farmers also have trouble with the delays of the tractor contractor. Hence the farmers tend to buy their own tractor.⁸

The farmers who buy small tractors finance their purchasing by either selling their buffalos or making loans. Sometimes they pay a down payment and pay-back the rest after harvest, and undoubtedly the price they pay for the tractor is high. The farmers usually rely upon their friends or relatives for the loan. Marcus D. Ingle suggested that the Bank for Agriculture and Agricultural Cooperative (BAAC) credit program can play a direct role in resolving farmer financial problems.⁹

In Supanburi and Chachoeng-sao, the average land holding of the farmers interviewed was approximately 40 rai and 50 rai respectively, and the average number of tractor owned per farmer was 0.80 and 0.40, respectively. The figure of 0.80 may be misleading as most interviews were made at the tractor dealer shops (14 samples in Supanburi and 50 samples in Chachoeng-sao).

What is the relationship between farm size and tractor ownership? In Supanburi, farmers

with a farm size of 30 to 75 rai would own 1 tractor and those with more than 75 rai would own 2 tractors. In Chachoeng-sao, The figures are not clear, but they illustrate the tendency towards tractor ownership in large farm holdings.

In Supanburi, the farm size averaging 40.64 rai has 1 tractor, where in Chachoeng-sao the average one-tractor farm size is 86.85 rai. Jave Hamid,¹⁰ using the Chancellor Formula for studying the tractor demand in Pakistan, after substituting the data concluded that the optimum tractor size was 10 HP which was applicable in the case of farm sizes of 14.50 acres (36.25 rai). A subsistence farm was 12.50 acre (31.25 rai) and the smaller farms tend to be consolidated towards this size.

Cost-Benefit Comparison among Small Tractor, Animal and Contractor Service

When farmers were asked why they sold their buffalos and bought a small tractor instead, the responses were :

- A buffalo works fewer hours compared to a tractor.
- A tractor works faster.
- The land is too hard for animal tillage in the second cropping.
- The hired tractor service fee is increasing and sometimes the contractor is late for appointment.
- Buffalo thieves are common, and the buffalo is very expensive.
- The tractor is a versatile machine.

At Chachoeng-sao, 44 per cent of the farm households used only mechanical power, 30 per cent used animal power and 26 per cent used both mechanical and animal power.

Taking the average farm size of 50 rai, the tillage costs (plow-

ing and harrowing cost) and the percentage of farm income is shown as the following : self-owned tractor, 3.51 percent ; hired tractor service, 4.11 percent ; and animal power, 4.86 percent.

Summary and Policy Implication

1. Distribution of sales. Manufacturing firms distributed their products to both dealers and farmers. The distance between the manufacturing firms the paddy areas somehow determined the proportion of buyers.

2. Price and credit allowance. The tractor price varied slightly among firms. There are "dealer price" and "farmer price". The discount is between 10 and 20 percent. In most cases, the dealers paid in advance while the farmers paid later.

3. Stock and storing. Only the big manufacturing firms can produce some whole tractor bodies for inventory. Some manufacture only parts of the tractor which are more time consuming and demand less space.

4. Promotional activities. The general practice of the firm is a tractor display. Most customers obtain tractor information from friends or relatives.

5. Capital shortage problem of manufacturers. If the tractors can be used as collateral, the firms would be able to overcome the capital shortage and increase the scale of production.

6. Capital shortage problem of farmer. Most tractor dealers were engaged in several products other than tractor. Their financial situation was sound. They served as a main financial source for the farmers in purchasing farm machinery.

7. Design problem. It is necessary for the firm to co-ordinate research with other institutions. Direct support in the form

of technical advice would be the most important. Tax reduction and subsidies are short-run measures, but sound technical knowledge will help the tractor business in the long-run.

8. Foreign import problem. Now that the price of imported tractor is high, opportunity exists for the local manufacturing firms to improve their product and compete with the importers.

ACKNOWLEDGEMENT

This paper is the summary of my master thesis. The assistance of Professor Delane E. Welsh for the initial work is deeply appreciated. The research fund from the International Rice Research Institute is also appreciated. Special thanks are due to Professor Motosuke Kaihara who assisted in the summary of this work and many others whose names the author will always remember.

REFERENCES

1. Royal Thai Government and Industrial Finance Cooperation of Thailand and United States Operations Mission to Thailand, "Thailand Farm Mechanization and Farm Machinery Market", A Co-ordinated Industry Study Project, 1969.
2. Department of Customs, "The Annual Statement of the Foreign Trade of Thailand", (1963-72).
3. Waranya Rewan. Case Study of An Engine Manufacturing Firm in Thailand (Thammasat University, Bangkok, June 1973).
4. Chirmsak Pinthong. Economics of Small Tractor Production in Thailand, Master of Economics Thesis. (Thammasat University, Faculty of Economics, 1974).
5. Samnao Ragtrakul and Chak Chakkaphak. Equipment Used in Thailand's Agriculture and New Developments in Equipment Designed for Rice Cultivation, (Workshop on Agro-industrial Development in the Lower Mekong Basin, 26 November-18 December 1973, Bangkok, Thailand).
6. Wang Jaw Kai. A Multiphase Strategy for Agricultural Mechanization, "Agricultural Mechanization in Asia". (Vol. IV No. 2, Autumn 1973, Farm Machinery Industrial Research Corporation).
7. Morsden, Keith. Technological Change in Agriculture, Employment and Over-all Development Strategy, "Mechanization and Employment in Agriculture". (International Labor Office, Geneva).
8. Chancellor, William J. Survey of Tractor Contractor Operation in Thailand and Malaysia. (Agricultural Engineering Department, University of California, Davis, California, U.S.A).
9. Ingle, Marcus D. Small Farmer Credit in Thailand. (AID Spring Review of Small Farmer Credit Vol XII, February 1973, No. SR 112).
10. Hamid, Javed. Agricultural Mechanization : A Case for Fractional Technology. (Teaching Form A/D/D, Development processes and planning, No. 33, September 1973). ■■

Japanese Small Tractor



by
Noboru Kawamura
Professor
Agricultural Engineering Department
Kyoto University
Kyoto, Japan

Introduction

Two-wheel tractors have played a leading role for the farm mechanization in Japan and about 3 million units are now in use. Recently owing to a high degree of economic growth and shortage of rural labour four-wheel tractors have been extensively introduced and 832 thousand units of them are in use. The percentage of four-wheel tractor use to the total farm households is only 17.2 and the riding tractors are fast taking the place of the walking type. The manufacture of four-wheel tractor in 1976 numbered 235.9 thousand units compared to only 23.9 thousand in 1967, an increase of about 10 times in 10 years. On the other hand, the production of two-wheel tractors decreased to 295.6 thousand units from 477.7 thousand units at the peak production time of 1967. Most of the tractors used in Japan are small ones. The number of tractors under 15 PS account for 47.8 percent ; 15-20 PS, 24.2 percent ; 20-30 PS, 20 percent ; and over 30 PS, 8 percent. The bigger tractors are almost imported and local production is limited to the under-83 PS size. This condition is mainly due to the agricultural

conditions in Japan : small and intensive farming, part-time farming and nature of rice cultivation. The total number of Japanese farm households is 4,953 thousand of which 87.6 percent are part-time farms whose owners depend on employment in industry and/or commerce for supplementary earning, the balance are full-time farmers. The total arable land in the country is estimated at 5,615 thousand hectares, of which 3,209 hectares are paddy fields and the rest are upland fields. The average size of paddy fields is about 10 ares for convenience of irrigation and drainage. Paddy fields are now being consolidated to 20-30 ares or more for improving the field efficiency of the riding type of farm machinery.

Tractor Types and Characteristics

The tractors manufactured in Japan are mostly the 10-30 PS size. They may be classified as small farm tractor but not the so-called garden tractor with gasoline-fed engine and of lighter construction. The main characteristics of Japanese tractors may be indicated as follows : rotary tiller tractor, multiple speeds with creeping speed, multiple PTO shaft speeds, multiple cylinder diesel engine of higher speed and the four-wheel drive. They are very suitable for Japanese farming ; i. e., small and intensive

farming, small field, soft and wet paddy field and higher precision work. They are usually the rotary tiller types of which the main implements are rotary tiller and not the traction type. Rotary tilling is more dominant than plowing in Japanese paddy fields as plowing leaves furrows and ridges and that secondary tillage e. g., harrowing and puddling require longer hours of labor. In addition, rotary tilling results in good soil pulverization and requires harrowing only as puddling with rotary tiller alone simultaneously levels the paddy fields.

As shown in Fig. 1, rotary tilling is more efficient as it is active tillage and the soil reaction R acts with the up-lift force V and horizontal thrust H , a reverse of the plow, type which facilitates the tractor performance. On paddy fields the traction efficiency is lower with higher rolling resistance and slippage of wheels. Much of the engine power is directly transmitted to the rotary blades for tilling the soil. Hence, the active tillage of rotary tiller is more effective than the passive tillage of the plow type of Tractor.

Tractors need more durable engine and construction for

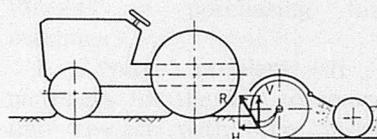


Fig.1 Forces acting on tractor and rotary tiller (Four-wheel tractor)

*Presented at the Spring National Conference organized by The Institution of Agricultural Engineers, held at the National College of Agricultural Engineering, Silsoe, Bedford, U.K., on 21 March 1978.



13 hp tractor




23 hp tractor



17 hp tractor



30 hp tractor

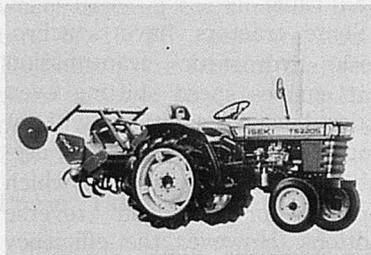

22 hp tractor

rugged and continuous farm use. The diesel engines of multiple cylinders are dominant. Even the 13 PS small tractors have 3 cylinders and the 10 PS 2 cylinders. It is mainly due to the severe ergonomic demands in the domestic use, especially noise and vibration reductions are serious considerations of the tractor design. Multiple running speeds and PTO shaft speeds are suitable for the rotary-tilling operation and other activities on the paddy fields and the upland fields.

Another characteristic of the Japanese tractor is the four-wheel drive feature. Hydraulic position control is also common among the small tractors, which is very suitable for rotary tilling. The draft control is featured only among the bigger tractors over 30 PS. Recently the electronic position control or power control mechanism for rotary tiller and hydro-static drive or power shift transmission have been introduced in the market.

Design and Technical Features

In 1977 about 157 models of locally manufactured tractors with engines ranging from 10 PS to 83 PS were available in the market. Their design and technical features are adapted to Japanese conditions.

The Tractor Weight

The tractor weight and its distribution on the front and rear axles are important factors for the maneuverability of the tractor. The weight per horse power of the small Japanese tractors has lower values than those of European tractors as shown in Fig. 2. The domestic tractors have about 30-55 kgf per horse power, and have the general tendency to decrease their values with an increase of the engine horse power. The main reason for tractors having lower weight per horse power is the need to fit them for the extensive usage of the rotary tiller, i. e. the basic design of the rotary tiller tractor. It needs more power to PTO shaft and less tractive force and power. The lower value of the weight per horse power is achieved by using the high speed diesel engine and lighter construction, and it improves the mobility of the tractor on soft and wet field. Al-

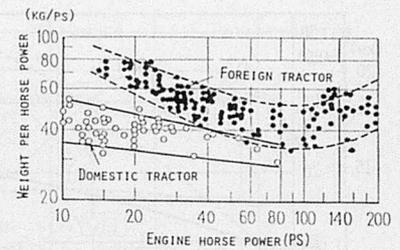


Fig.2 Weight per horsepower of tractors

most all Japanese tractors have two models of the two-wheel drive and four-wheel drive types. The weights of the four-wheel drive tractors are heavier than the rear-wheel drive ones by 40 to 100 kgf. The weight distributions on the front and rear axles for the rear-wheel drive tractors are about 45 percent front and 55 percent at the rear. For the bigger tractors the front weight percentages decrease to 40-42 percent. If the front axle load is light, there is a danger of rising up the front wheel. If it is heavy, on the contrary, steering on soft and wet field is difficult. These values seem a little higher than the conventional tractor, but with the mounting of the rotary tiller on the tractor these values become about 23-28 percent. The weight of the four-wheel drive tractors is almost equally distributed on the front and rear axles.

Engine

Almost all the Japanese tractors even with low horse power are fitted with diesel engine with multiple cylinders. Only a few are fitted with gasoline engine. In recent years some tractors with only one cylinder horizontal engines were manufactured but most of them have since disappeared from the market. The cylinder diesel engine ; 25-35 PS are normally fitted with two cylinder diesel engine ; 25-35 PS three cylinders and over 35 PS four cylinders. Recent trends shows that even the 13 PS class tractor has three cylinder diesel engine. In spite of the popularity of multiple cylinder engines for small horse power tractors

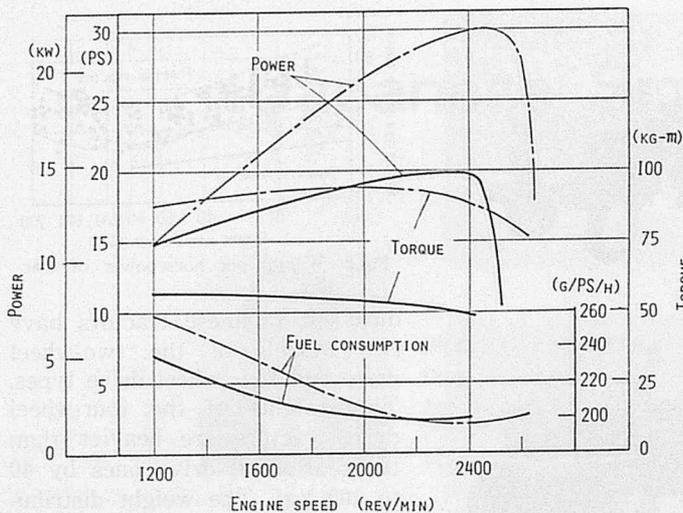


Fig. 3 Characteristic performance curves of tractor engines resulting in smaller cylinder diameter and losing the advantage of elastic torque characteristics of diesel engine and higher cost, the tendency is to aim at adapting them to the demands of lower noise and vibration.

The typical characteristic performance curves of diesel engines are shown in Fig. 3. The torque curve of smaller engines is comparatively flat to the wide engine speed, and this is suitable for heavy rotary tilling work. This means that the smaller engine has less power reservation for heavy work load without being sensitive to speed change. The bigger tractors which are used for tractive rugged, heavy work have torque curves that increase by 20-25 percent with the drop of speed from the maximum horse power.

The speed of engines in Japanese tractors is higher than those of the European and American tractors. This means lighter weight of Japanese engines and higher power output per displacement (Fig. 4) with a rated speed of about 2200-2800 RPM. The minimum specific fuel consumption is about 200 g/PS/h at the speed ranges of the maximum torque. A small turbo super charger of 1500 RPM at maximum has been applied recently to the 30 PS class of 1487 cm³ displacement, which attains 38 PS output with the same engine. The super charger increases the horse

power output per displacement to 25.6 PS/l with improved thermal efficiency as shown in Fig. 4. Another advantage of the turbo super charger feature is that even the operator who is licensed to drive small cars can drive the tractor of which engine displacement is under 1500 cm³ without violating vehicular regulations in Japan.

Travelling Devices

The majority of the tractors used in Japan have six forward speeds from 0.85 to 14.6 KPH, and two reverse speeds. The maximum speeds of the smaller tractors are a little lower to 10 to 12 KPH. New tractors have higher speeds up to 16-24 KPH with creeping speeds. The minimum creeping speeds are about 0.1-0.2 KPH. Normal tilling speed is 1-2.5 KPH, so that six speeds are enough for ordinary tilling work. But lower travelling speeds or creeping speeds are used for fine tilling, deeper tilling, transplanting, etc. These multiple speeds of small tractors enable them to adapt the rotary tilling work for various soil conditions. Many gear ratios are necessary by using the PTO driven equipments which must run at fixed speeds and hence do not require travelling speed change by altering the engine speed. The highest speeds of small tractors whose engine displacement are less than

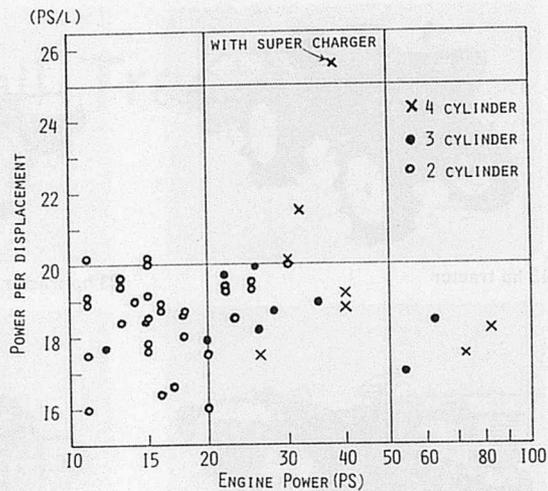


Fig. 4 Power per displacement 1500 cm³ are limited to 15 KPH by Japanese legal restrictions of road traffic.

Some tractors have synchromesh hydrostatic transmission that enables speed shifting even under loaded conditions without stopping. They are also very useful for loader operation which repeats forward and reverse motions. However the efficiency of the hydrostatic transmission is lower than the gear type. Some tractors have power shift transmissions of which the gears are shifted by hydraulic power (Fig. 5). They have better efficiency than the hydrostatic transmission but are not synchromeshed. Continued effort is being devoted to developing the automatic control of travel speed with sensing devices for rotary tilling load or engine output.

For tractor travel on soft soil a differential lock is essential, including many subsidiary devices

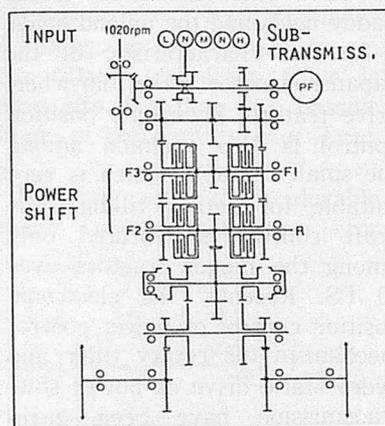


Fig. 5 Power shift transmission

such as girdles, strakes, cage wheel, half track and special pneumatic tyres so-called high lugtyres. At the present time, most country roads in Japan are paved so that high lug tyres have become popular.

The four-wheel drive feature of tractors with smaller front wheels is another effective method of travel on soft soil. It has more tractive force than the rear wheel drive and about 30-40 percent of tractive force increases on the same condition. It is also convenient for the tractor to run over paddy field ditch and is suited for hillside work. The wheel bases of the smallest tractors of 10 PS class are about 1100 mm. ; tyre sizes of the front wheel are 4.00-10 2 pr ; 4.00-12 2 pr for the four-wheel drive ; 7-14 2 pr. for rear wheel.

Power Take-off Shaft

Most of the European and American tractors have only one or two PTO shaft speeds of 540 to 1000 RPM but domestic tractors have usually three or four speeds. Tractors over the 15 PS class have a standard speed of 540 RPM but smaller tractors have speed ranges suitable for rotary tillers. Some examples of PTO shaft speeds are shown in Table 1.

Rotary tilling operations require more rotary speeds according to soil conditions and the degree of soil pulverization. If the change gears are on the tractor, not on the rotary tiller, the gear shift is easily operated from the driver seat not to mention the lighter weight of rotary tiller. Small tractors can be used with the combination of many PTO shaft speeds and many travelling speeds for various farm conditions.

Table 1. PTO shaft speeds

Engine power ps.		11	11	22	30
PTO. shaft speed	1st.	462	540	547	542
	2nd.	765	847	709	685
	3ed.	1280	1320	929	1005
	4th.	—	—	1230	1268

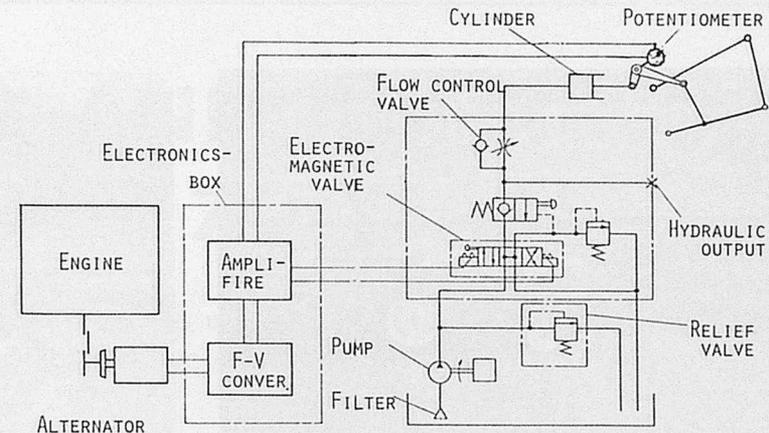


Fig.6 Electronic hydraulic control system

Hitching and Hydraulic System

The tractors over the 15 PS class have usually three-point linkage hitch. The smaller tractors ranging from 10 to 15 PS have special two-point linkage hitch or direct fitting devices for the rotary tiller. The bigger tractors have the three-point linkage hitch of category 1. The smaller tractors have that of category 0. The category 0 in JIS (Japanese Industrial Standard) is almost similar to that of category IN in ISO plan, but with wider hitch point spread of 565 ± 1.5 mm (400 ± 1.5 mm in ISO), longer mast height 410 mm (360 mm) and smaller lift range of 300 mm (420 mm). These differences are mainly due to the fact that the Japanese hitch is intended for the rotary tiller whereas the European hitch is designed for the plow.

The capacities of hydraulic pumps used in the 10 PS class are about 7 l/min. and gradually increase with higher power to 30 l/min. in the 30 PS class. The relief pressures used are about 140-155 kgf/cm² (13.7-15.2 Mpa.) Small tractors have no position control system and the tilling depth is controlled by the gauge wheels attached behind the rotary tiller. The tractors over 15 PS class usually have the position control which gives flat cultivation and more tilling force by combining the weight of the tractor and the rotary tiller when the control valve is in neutral posi-

tion. The bigger tractors over 30 PS have also the draft control system.

Recently the electronic hydraulic position control system or the combination of position and power control system of the rotary tiller was introduced in the market. One position control system has a sensing device attached to the rotary tiller cover touching the ground. Another position control system has a sensing device of potentiometer attached to the lift arm shaft and the rotary tilling is sensed by the drop of engine speed using alternator's electric pulse and converted to electric voltage with electronic circuit (Fig. 6). With electric signal the magnetic valve is activated and lifts the rotary tiller by gradual steps. This system does away with the use of the gauge wheel and is easy to adapt to soil conditions and to do mixing control.

Farm Implements

The rotary tiller is of course the main implement for the small tractors mentioned above. There are many choices of other implements such as plow, harrow, vibrating mole drainer, seeder, broadcaster, pest control machine, hay making machine and front loader.

The rotary tillers for small tractors have relatively shallow tillage depth of about 10 to 15 cm. The tilling widths are usually wider than the outer width of the



Tilling by rotary tiller



Puddling on submerged paddy field




Deep ploughing by bottom plough tyres to achieve higher capacity and better finishing of tillage. The minimum width of the rotary tiller for the 10 PS class tractor is about 900 mm.

The design feature of the rotary tiller for the small tractor is to reduce power consumption in spite of its width, hence the number of tilling blades is reduced, tilling speed is lowered and lower resistant blades are used. Ordinary tilling higher torque and fluctuation of the rotary tilling are the limiting factors of the rotary design.

The deeper tilling rotary tiller is so designed that its shaft sinks down under the ground level with the use of very slow travel speed and special blade arrangement. The front loader is also attached to the small tractors. It is very useful for hay handling in small farms and snow moving. The rotary tiller does not have to be detached during these operations. It also features a quick attaching device of the front loader (docking loader).



Tractor-mounted vibrating mole drainer

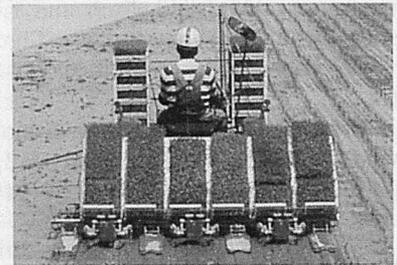

Tractor-mounted rice transplanter (6-rows), at work



Mulching by two-row mulcher

Some Technical Problems

The tractors are often used for puddling on paddy field, hence water-proofing at the brake system, front axle, rear axle, PTO shaft and rotary tiller shaft is an important design factor for rice cultivation. The brakes of domestic tractors are sealed and suited on the shafts in front of the rear axle. Rubber seals and O-rings are fitted at many places of the shaft systems.

Safety and comfort of the driver is a big problem for the small tractor. The safety frame for small tractors which have lighter weight presents hazards and problems for the higher gravity center and the danger of

overturn. Although there are no legal restrictions in Japan to attach the safety frame or cabs, this problem needs to be solved soon. Another ergonomic demand of lower noise and vibration reduction as well as lower emission of CO and NOx are new problems facing the tractor designers and technologists. ■■


THINKING AND THINKING, MORE THAN 70 YEARS

When turn around ourselves, it was absorbed for the development and research since we established in 1901.




FROM NOW ON


We would like to pay our full effort for the development of the new tractor implement to meet various requirement and the plant for re-cycling of the resources such as surplus activate sludge treatment and*alkali treated high quality fodder from rice and barley straw. * Patent



● POWER HARROW

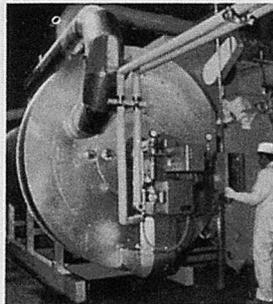

● RE-CYCLING PLANT



● BROADCASTER



SASAKI NOKI CO.,LTD.

HEAD OFFICE/
TOWADA AOMORI JAPAN TELEX 8255-70 SASAKI


TOKYO OFFICE/OVERSEAS DIV.

5F MATSUOKA BLDG.,5-5,YAESU,CHUO-KU,TOKYO 104 JAPAN
TEL 03 - 272 - 2831

TELEX : 2228129 SASAKI. J

FOREMOST IN THE RICE WORLD

SATAKE

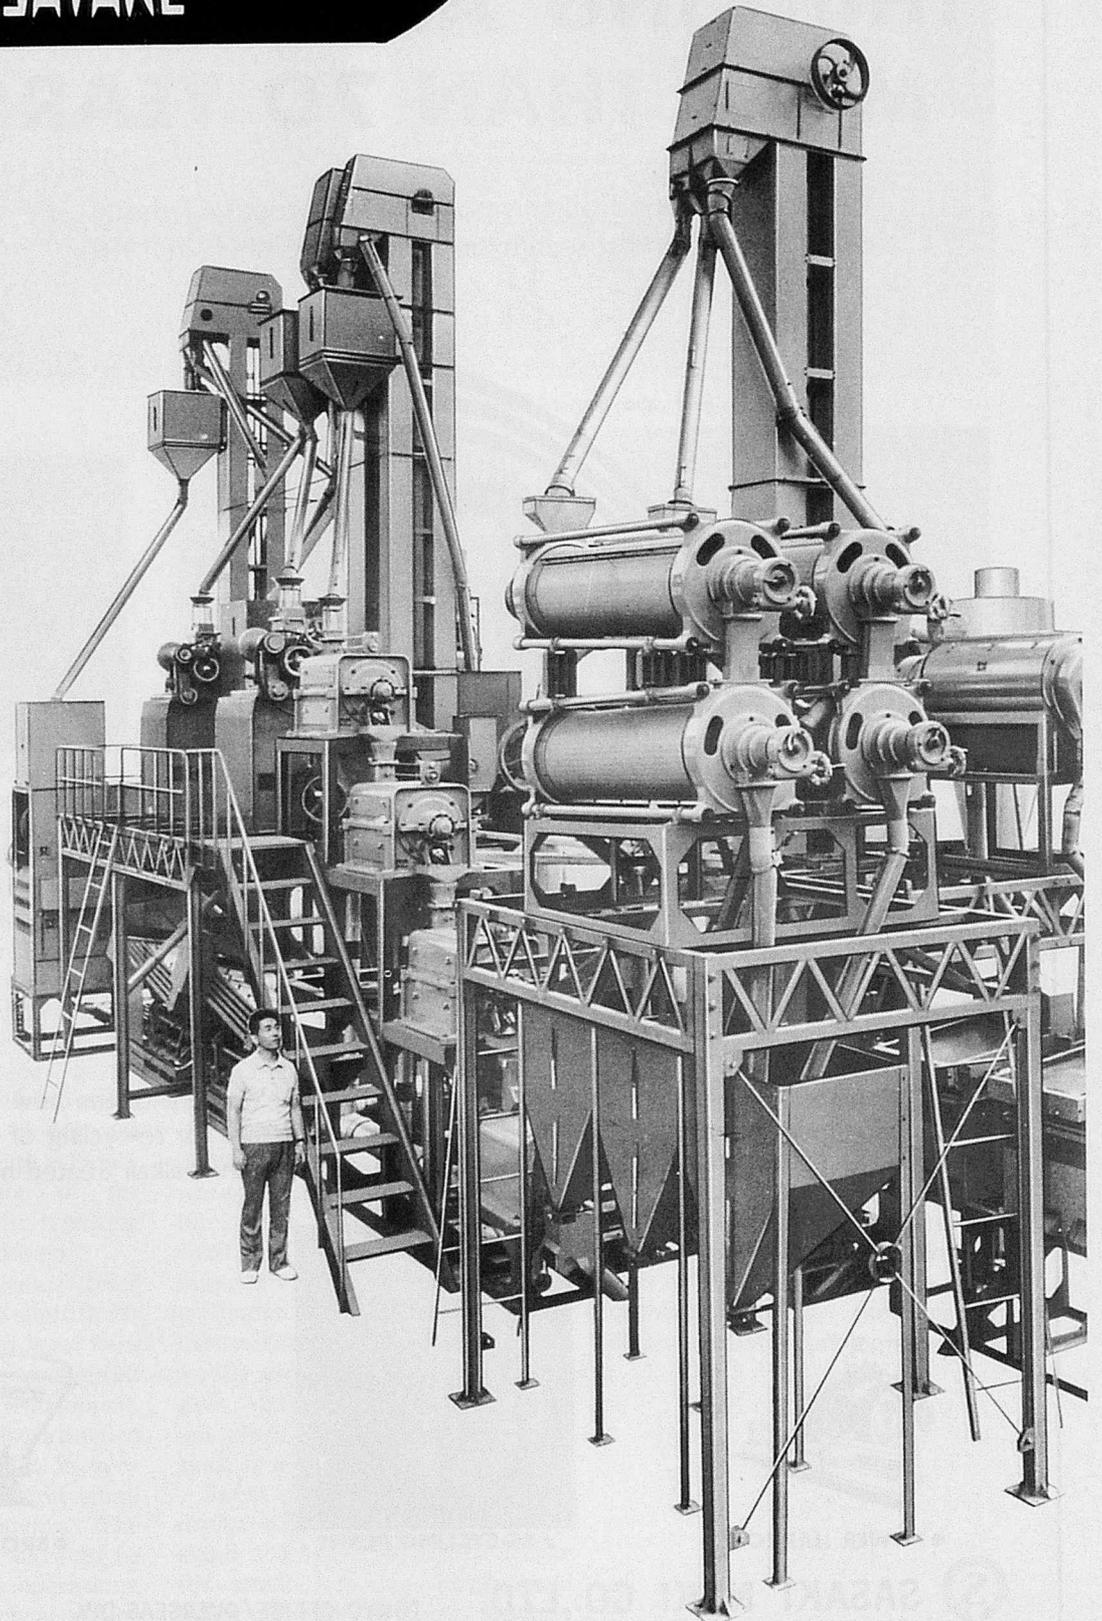

4-TON TYPE RICE MILLING PLANT


WHERE RICE IS, YOU FIND — SATAKE

Satake is a name well known in the broad area of rice processing. Anyone involved, who is interested in the best rice processing, has certainly heard the name "SATAKE".

Satake rice mills can be found in virtually every country in the world where rice is produced.



HIROSHIMA PLANT

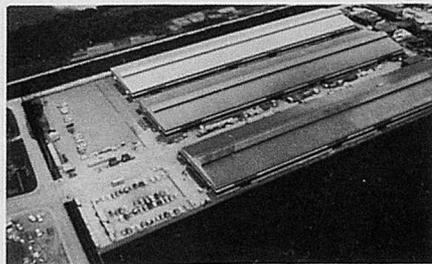


TOHOKU PLANT


The Satake Group of companies has fifteen hundred employees dedicated to the goal of maintaining Satake as the foremost manufacturer of rice drying and milling machinery. They, too, are always seeking ways to improve the old and develop new products.

SATAKE ENGINEERING CO., LTD.

UENO HIROKOJI BLDG., UENO 1-19-10, TAITO-KU, TOKYO, JAPAN

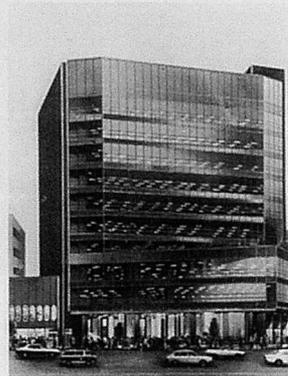


HEAD OFFICE

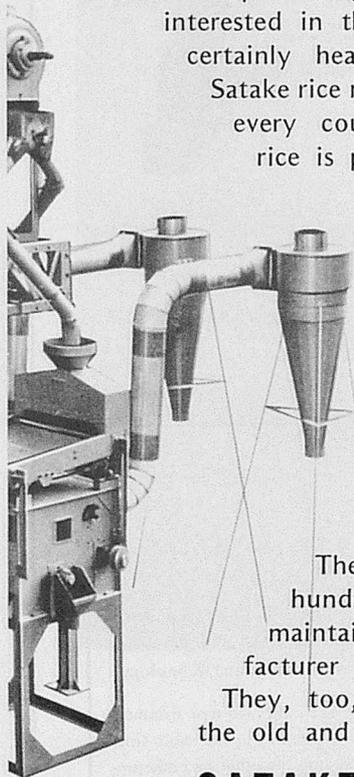

OCHIAI'S


TEA-LEAF PICKERS

TWIG CUTTER & SHEARS

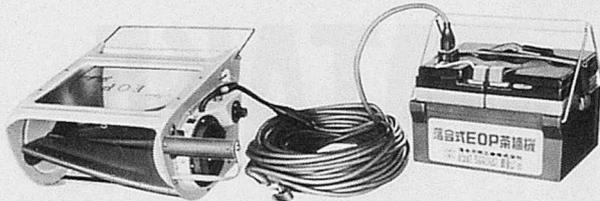


EOPA8

Features:
Light, safe, and efficient.

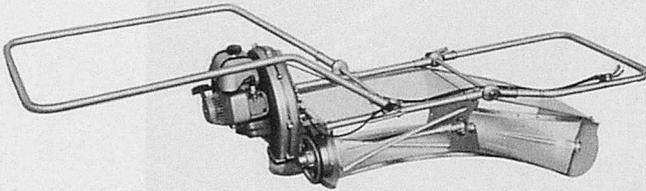


Features:
Light and efficient, making little noise while in operation. In Japan, it is capable of picking tea leaves on 60 to 80 ares of tea plantation in a single day.

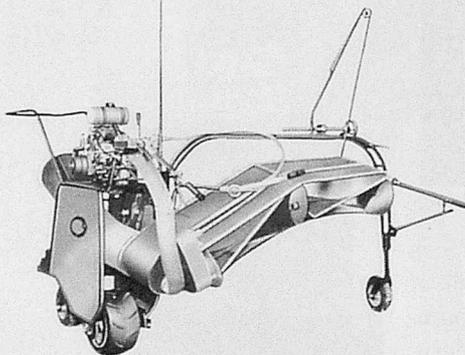

self-propelled tea-leaf picker

Features:
The first self-propelled tea-leaf picker in the world, with an original mechanism, OCHIAI developed, can be operated easily by one person.

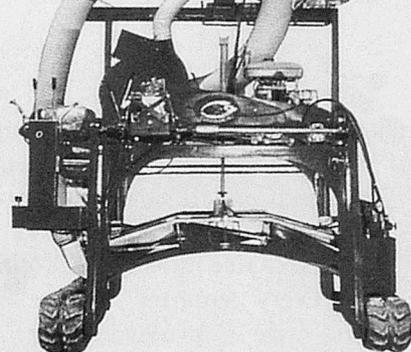

riding typed tea-leaf picker

Features:
The first riding typed tea-leaf picker in the world, with a hydraulic linkage, can reap completely.

GUIDE TO OCHIAI

- Succeeded in devising Japan's first automatic tea-leaf picker in 1959.
- Received the Director of the Board of Scientific Technology Award in 1967.
- During the intervening period (1959-1967) obtained a number of patents, as well as receiving a variety of awards and prizes in the domain of science and technology.
- The top-ranking tea-leaf picker and tea-tree trimmer producer, holding 60% of the shares in the same line of business in Japan, surpassing the other manufacturers in sales and product, and leading the related business worlds in its expansion and development.



OCHIAI HAMONO KOGYO CO., LTD.
OCHIAI SHOJI CO., LTD.

Head Office: 38, Chokaiji, Kikugawa-cho, Ogasa-gun, Shizuoka-ken, Japan Tel. Kikugawa (05373) 6-2161~5

INQUIRY and REQUEST to AMA

Please let us know your need. We shall promptly reply them. Inquire on any catalog listed in the advertisement in this issue. We shall try our best to serve you.

We welcome articles of interest to agricultural mechanization.

Fill in the reverse side of this card and send us by sealed letter.

FARM MACHINERY INDUSTRIAL RESEARCH CORP.

7-2 Kanda Nishikicho, Chiyoda-ku, Tokyo-Japan 101

OCHIAY'S
TEA-LEAF PICKERS
TWIG CUTTER & SHEARS

ADVERTISED PRODUCTS INQUIRY

Product	Advertiser	Vol., No., Page

EDITORIAL REQUEST TO AMA

Your Name :

Address :

Occupation :



OCHIAI HANDING KOSYO CO. LTD.

OCHIAI SHOW CO. LTD.

Head Office: 35, Chiyoda-1-chome, Chiyoda-ku, Tokyo 100, Japan
Tel: 3-3541-1111

SUBSCRIPTION/ORDER FORM

AGRICULTURAL MECHANIZATION IN ASIA (AMA)
Issued Quarterly

Subscription Rate(includes surface mail postage)

Annual(4 issues)-----¥5,000
Single copy -----¥1,500

Back Issues (1971—75, ¥2,000 per copy)
(1976—77, ¥1,200 per copy)

- | | | |
|---|---|---|
| <input type="checkbox"/> Spring, 1971 | <input type="checkbox"/> Vol.5 No.1, Summer, 1974 | <input type="checkbox"/> Vol.7 No.4, Autumn, 1976 |
| <input type="checkbox"/> Autumn, 1971 | <input type="checkbox"/> Vol.6 No.1, Spring, 1975 | <input type="checkbox"/> Vol.8 No.1, Winter, 1977 |
| <input type="checkbox"/> Vol.3 No.1, 1972 | <input type="checkbox"/> Vol.6 No.2, Autumn, 1975 | <input type="checkbox"/> Vol.8 No.2, Spring, 1977 |
| <input type="checkbox"/> Vol.3 No.2, Summer, 1972 | <input type="checkbox"/> Vol.7 No.1, Winter, 1976 | <input type="checkbox"/> Vol.8 No.3, Summer, 1977 |
| <input type="checkbox"/> Vol.4 No.1, Spring, 1973 | <input type="checkbox"/> Vol.7 No.2, Spring, 1976 | <input type="checkbox"/> Vol.8 No.4, Autumn, 1977 |
| <input type="checkbox"/> Vol.4 No.2, Autumn, 1973 | <input type="checkbox"/> Vol.7 No.3, Summer, 1976 | |

(Check issues and number of copies you wish to order)

Back Issues from 1978, ¥1,500 per copy

Vol. _____ No. _____, 197 _____, _____ copy/copies

(check one)

Please invoice me/us

I/We enclose remittance for ¥ _____

Name: _____

Firm: _____

Position: _____

Address: _____

(block letters)

FARM MACHINERY INDUSTRIAL RESEARCH CORP.

7, 2-chome, Kanda Nishikicho, Chiyoda-ku,

Tokyo 101 Japan

Tel. (03)-291-3671-4, 5718

STAMP

FARM MACHINERY INDUSTRIAL RESEARCH CORP.

7,2-CHOME, KANDA NISHIKICHO, CHIYODA-KU
TOKYO, 101 JAPAN


1st FOLD HERE

2nd FOLD HERE



OCHIAI THAI CO., LTD.
OCHIAI THAI CO., LTD.


Performance Studies of Country Ploughs in Bangladesh



by
Md. Daulat Hussain

Assistant Professor

Department of Farm Power & Machinery Bangladesh Agricultural University
Mymensingh, Bangladesh



Md. Rafiqul Isiam Sarker

Associate Professor

Introduction

The country plough is one of the oldest of all agricultural implements throughout the world and it is still the most important tillage equipment in Bangladesh. The use of machine power in agriculture is very negligible. The per acre crop production is 0.421 tons per acre (Choudhury, 1972). Yield studies have indicated that under certain conditions with some crops there is apparent advantage in ploughing (Kepner, 1972). The country plough is still by far the most used implement in primary tillage in seedbed preparation. High yield crop production is based on the stirring of the soil with some type of implement, usually a plough, to provide well pulverized seedbed (Barris, 1955).

Bangladesh has a wider range and greater complexity of soils. To-date, more than 200 soil series have been established, of which about 80 (Brammer, 1975) can be considered important soils. The whole soil series can be grouped into four main divisions: Chittagong hill tracts and related areas; Pleistocene terraces; Himalyan piedmont alluvial plain; and Fresh deltaic flood plain.

Soils are mainly silt, silty clay

loam, clay loam and sandy loam. Depending on the different types of soil structure and texture, the Bangladesh farmer uses different shapes, sizes of tillage implement for tillage operations. The shape, size and weight of country ploughs vary with different localities of Bangladesh.

Heretofore, no comprehensive information was available on the performance of country ploughs. For the proper and suitable design, some basic information is needed on the existing ploughs which are currently being used in tillage purposes. With a view to collecting some information on existing country ploughs, some experimental investigations were carried out at the Bangladesh Agricultural University farm which included the measurement of drawbar horsepower, specific draft, width of cut, depth of ploughing, etc.

Capacity of Draft Animals

Many factors affect the capacity of a draft animal, including the kind and size of animal, condition, training, footing, method of hitching and speed of travel. The normal draft capacity of an animal is approximately on tenth of its weight (Hopfen, 1960).

Table 1 gives the examples of the capacity of various draft animals,

Bullock or cow power is not uniform during the course of its operation in the field. At the beginning the output of power is high but decreases as the duration of working time increases (Fig.30). That is why the tilling work is not up to the required mark. The best tillage provides good yield of crop. It is experimentally found that with proper tillage and land preparation by improved agricultural imple-

Table 1. Capacity of draft animals.

Animal	Average Weight(Kg.)	Approximate Draft(Kg.)	Average Speed(m/sec)	Hp Equivalent
Buffalo or Carabaos	452	55 ¹	1.04	0.75
Cows	400-600	50-60	0.70	0.45
Bullocks	500-900	60-80	0.60-0.85	0.75
Bullocks	980	123 ²	N.A.	N.A.
Bullocks	350	55-70 ³	N.A.	N.A.

Source: S. B. A. Equipment for rice production, FAO. Rome, 1966. pp. 33.

1. The maximum pull recorded in the Philippines during this test was 410kg.

2. Maximum, India.

3. A well fed adult, Senegal.

N.A. = Not available.

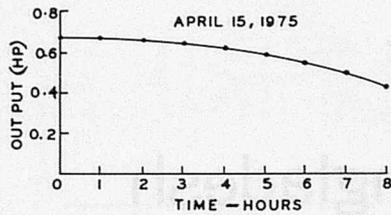


Fig.30 Capacity of one pair of bullocks during field operation

ments, an increased production of crop up to 20 to 25 percent (Haque, 1967), may be obtained.

Country Plough of Bangladesh

Most of the ploughs used in Bangladesh are made by the village blacksmiths. There are many shapes and sizes of which some are big, some medium and some small. Generally, big and medium ploughs are used for dry field

Table 2. Specifications of country ploughs

Item (shown in Fig. 29)	Value *
x	2' - 8" - 3' - 0"
y	1' - 10" - 2' - 6"
z	1' - 2" - 1' - 6"
p	3' - 4'
q	5' - 6'
s	2' - 4" - 4' - 0"
θ	60° - 65°
β	80° - 100°
ϕ	13° - 15°
ϕ'	30° - 35°
Weight	10 - 30 lbs.
I	6" - 10"

*The values are obtained from a survey conducted by the department of Farm Power & Machinery, Bangladesh Agricultural University, Mymensingh in 1974.

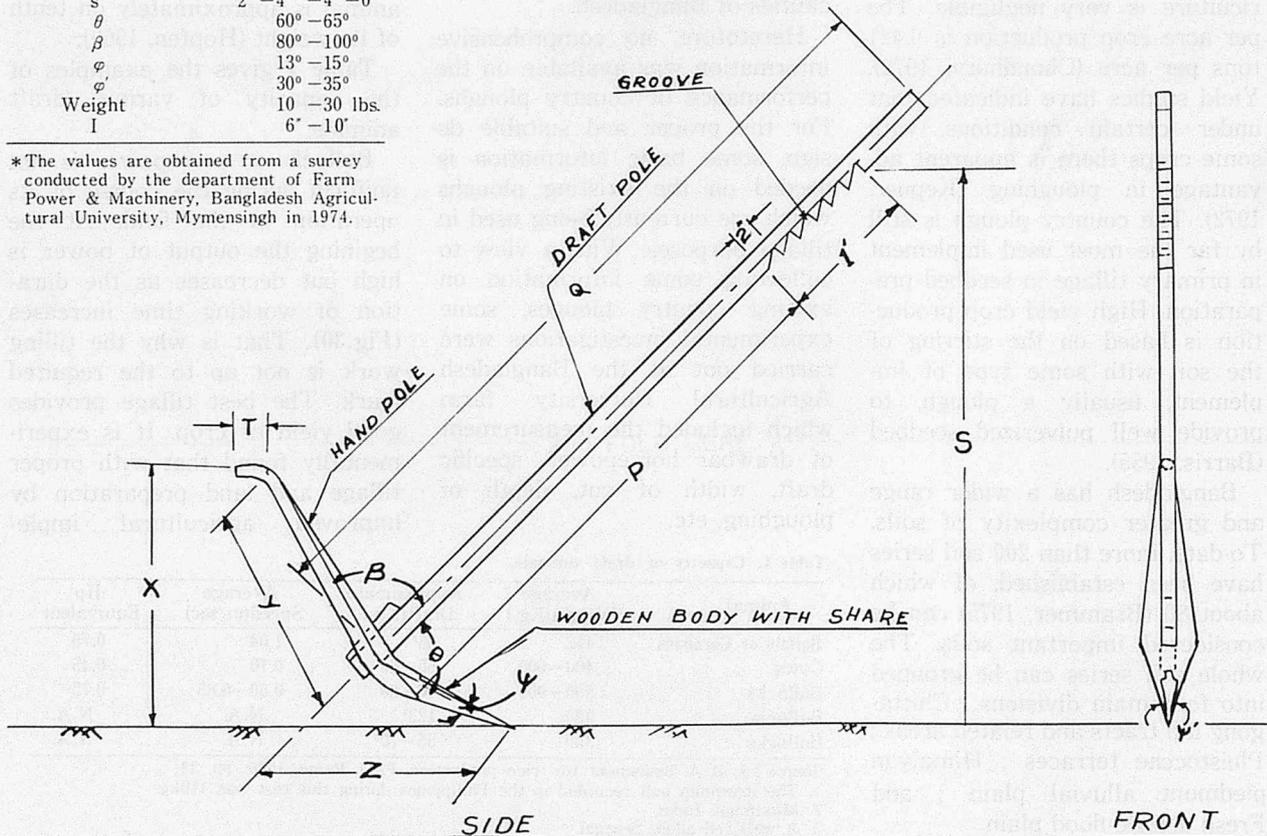


Fig.29 Typical example of a country plough Specifications are shown in Table 2.

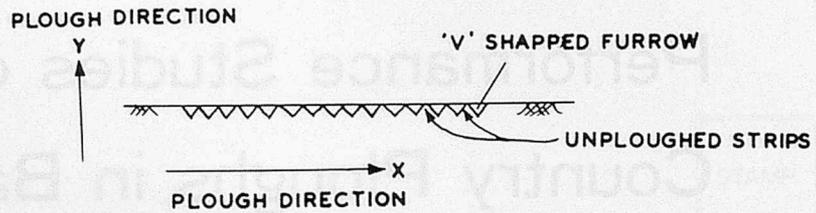


Fig.31 Cross sectional view of land preparation method with country plough work and small are used for wet field cultivation. A typical country plough is shown in Fig.29 The specifications of this plough are shown in Table 2.

Characteristics of Plough

- i) The plough cannot turn the soil over as it has no mold-board.
- ii) The furrows cut by the plough are 'V' shaped and as a result unploughed strips are left between furrows. The land has, therefore, to be ploughed in different directions in order to break up the unploughed strips (Fig.31).
- iii) The depth of ploughing is only 2-3 inches and width of
- iv) It takes more time and labour than that of mold-board ploughing.
- v) During tilling operation, the plough proceeds in series of jumps, doing very poor work and making it harder for bullock to pull.
- vi) The line of draft does not pass through the center of the resistance of the plough and therefore plough does not ride steadily at a uniform depth.
- vii) The ploughs are light enabling ordinary bullock or cow to pull them easily.
- viii) Simple knowledge is required for its manufacture and is very cheap in comparison with imported moldboard ploughs.

Depth Adjustment

The control mechanism of depth in a country plough is maintained by 'Heel toe' principle. If the implement runs deeper than normal working condition, it will pitch backward slightly rotating about the hitch point and an additional soil support force will be induced in the plough. This restores it to its equilibrium depth. Something happens when the implement runs shallow : it will pitch forward hence downward soil force is induced which restores the implement to its normal working depth.

In real practice, depth of ploughing is adjusted by changing the length P (Fig. 29) with the yoke. The range of adjustment is limited.

Draft on Plough

The draft require for country plough is affected by many factors such as the size and shape of the bottom, the overall hitching arrangement, the depth and width of furrow, soil types and its characteristics. The main factor is the speed of the plough in the field. The draft may range from 5 to 12 Psi in case of moldboard plough (Agric. Engg. Year Book, 1954) but with country plough it is 10 to 37.0 Psi.

The draft of the country plough can be determined by a dynamometer which indicates the pull or draft of the plough over a measured distance. Then, knowing the rate of travel, the horsepower as well the specific draft can be determined.

Drawbar Horsepower (DBHP)

$$\begin{aligned} & \text{Pull by the cows or oxen} \\ & \times \text{distance travelled in feet} \\ & = \frac{\text{per minute}}{33,000} \end{aligned} \quad \dots\dots\dots (1)$$

Specific draft

$$\begin{aligned} & \text{Pulling force at a certain} \\ & \text{time} \\ & = \frac{\text{Cross-sectional area of the}}{\text{furrow slice at that time}} \end{aligned}$$

Effective Field Capacity of Country Plough

The effective field capacity of the country plough may be expressed by the following relation (Mckibben, 1930) :

$$\begin{aligned} C_p &= \frac{5280 \times S \times W \times Ef}{43,560 \times 100} \\ &= \frac{SWEf}{825} \end{aligned} \quad \dots\dots\dots (3)$$

Where C_p = Effective field capacity of plough in acres per hour.

S = Plough speed in miles per hour.

W = Rated width of cut of implement in feet.

Ef = Field efficiency in percent.

Field efficiency is the ratio of effective field capacity to theoretical field capacity, expressed as percent. The effective field capacity is the actual average rate of coverage by the plough.

Results and Discussions

Ploughs were collected from 19 districts of Bangladesh. Twenty-eight ploughs were tested of which 7 were from Mymensingh, 3 from Comilla, 2 from Dacca and one plough each from the rest of the districts. The general features of the ploughs are shown in Fig. 1 to 28.

The weight of the individual ploughs were measured in the Agricultural Machinery Laboratory. A 1.5 acre seice of land was selected for test performance of the ploughs. A spring loaded dynamometer was designed and constructed to measure the pulling force required for the ploughs. Performance data were recorded in the field in three replications. Time per bout, depth of cut and width of cut were recorded. The time per bout and total time for field operation were recorded with the help of

a stopwatch. The drawbar horsepower required for each ploughs were calculated from equation (1) and the specific draft also estimated from equation (2). The field capacity of the ploughs were calculated from equation (3).

There were 28 × 3 plots. Area of each plots was 600 ft² and the soil was homogeneous. A local variety of paddy 'Dhariol' was cultivated in each plot. No fertilizer was used to see the tilling effect of the individual ploughs. The minimum and maximum tilling area were 0.042 and 0.077 acres per hour and corresponding drawbar horsepower were 0.27 and 0.40 for the ploughs P₂₂(Fig. 22) and P₁₀ (Fig. 10), respectively. The minimum and maximum specific Draft recorded were 10 Psi and 31.0 Psi for the ploughs P₆(Fig. 6) and P₂₂. The test results are shown in Table 3.

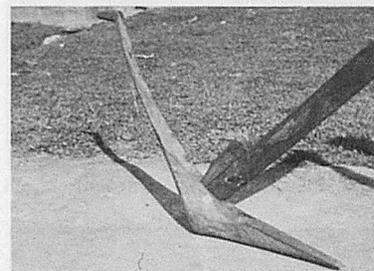


Fig.1 Plough No.1

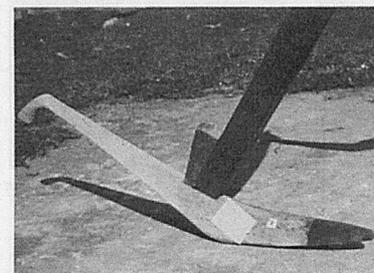


Fig.2 Plough No.2

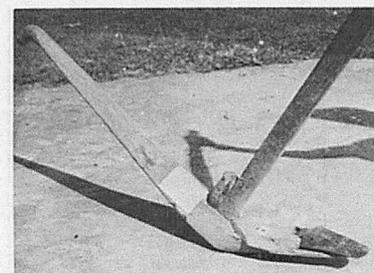


Fig.3 Plough No.3

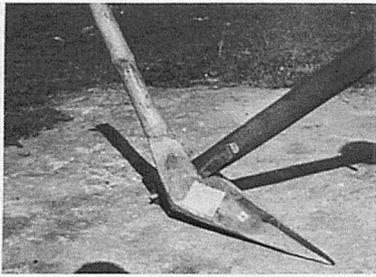


Fig.4 Plough No.4

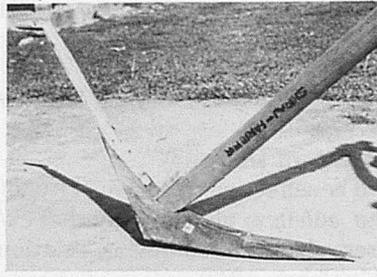


Fig.7 Plough No.7

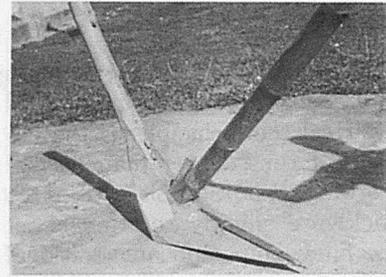


Fig.10 Plough No.10

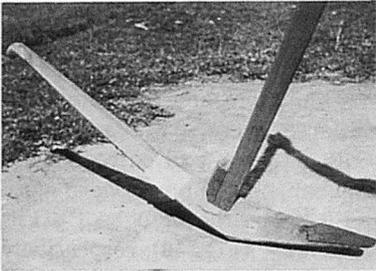


Fig.5 Plough No.5

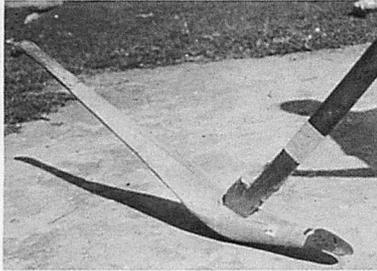


Fig.8 Plough No.8

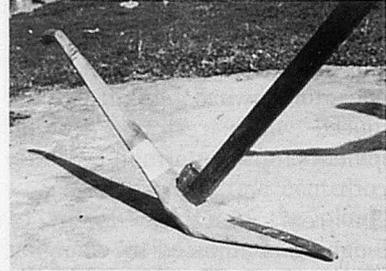


Fig.11 Plough No.11

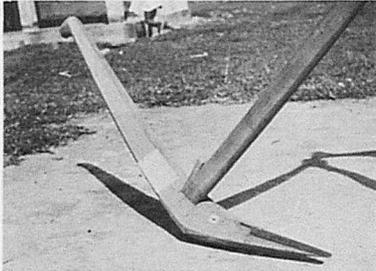


Fig.6 Plough No.6

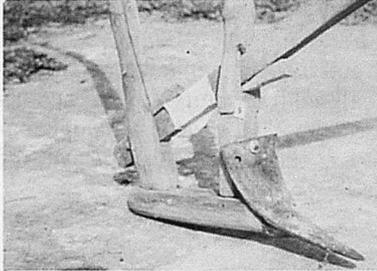


Fig.9 Plough No.9

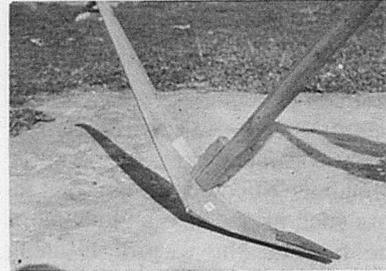


Fig.12 Plough No.12

Table 3. Performance of country ploughs

Plough No.	Plough Weight (lbs)	Average Width of Cut (inch)	Average Depth of Cut (inch)	Tilling Area (acres/hr.)	Drawbar horse-power (Hp)	Pulling Force (in lbs)	Average Speed (ft sec.)	Specific Draft (Psi)	Average Yield /60Q ft ² (lbs)
P ₁	15	4	2.25	0.0635	0.37	90	2.31	20.	25.1
P ₂	19	4.25	3	0.059	0.38	100	2.14	15.7	33.2
P ₃	12	2.75	2.25	0.044	0.33	80	2.4	25.8	31.5
P ₄	25	4.75	4	0.065	0.36	100	2.0	10.5	27.2
P ₅	10	3.8	2	0.058	0.33	75	2.22	19.7	26.7
P ₆	16	4.0	3.5	0.063	0.29	70	2.31	10.0	36.0
P ₇	20	3.5	3	0.053	0.36	90	2.22	17.1	25.0
P ₈	9	3.0	2.5	0.052	0.27	60	2.5	16.0	20.5
P ₉	11	3.5	3	0.054	0.33	80	2.31	15.20	24.0
P ₁₀	19	5	2	0.077	0.40	100	2.22	20.0	26.6
P ₁₁	15	4	2	0.060	0.38	100	2.14	25.0	25.4
P ₁₂	13	4	2	0.060	0.42	110	2.14	27.5	26.8
P ₁₃	14	4	3	0.058	0.41	109	2.10	12.1	24.8
P ₁₄	15	4.1	3	0.059	0.43	115	2.07	18.7	27.9
P ₁₅	18	4	2	0.059	0.38	100	2.14	25.0	20.1
P ₁₆	17	5	2.75	0.083	0.34	80	2.40	11.6	21.8
P ₁₇	14	4.5	3	0.072	0.31	55	2.31	11.1	21.0
P ₁₈	13	4	2.5	0.064	0.33	00	2.31	16.0	23.5
P ₁₉	13	4	2	0.059	0.31	00	2.14	20.0	19.2
P ₂₀	9	3.5	2	0.054	0.37	90	2.31	25.7	21.8
P ₂₁	12	4	2.5	0.061	0.36	90	2.22	18.0	21.0
P ₂₂	12	3	1.5	0.042	0.27	70	2.0	31.0	30.2
P ₂₃	12	4	3.0	0.061	0.32	80	2.20	13.3	25.0
P ₂₄	10	3.7	2.7	0.061	0.36	85	2.36	17.0	24.8
P ₂₅	10	4	2.0	0.061	0.32	00	2.22	20.0	25.0
P ₂₆	25	5	3.0	0.069	0.36	100	2.00	13.3	22.8
P ₂₇	25	5	3.0	0.069	0.32	100	2.00	13.3	22.9
P ₂₈	27	6	3.0	0.073	0.38	120	1.76	13.3	23.8

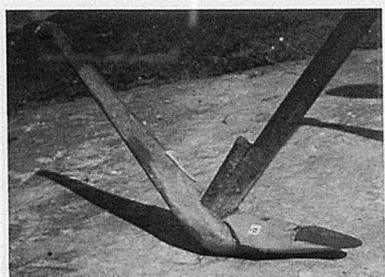


Fig.13 Plough No.13

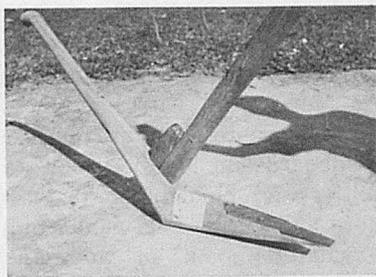


Fig.17 Plough No.17

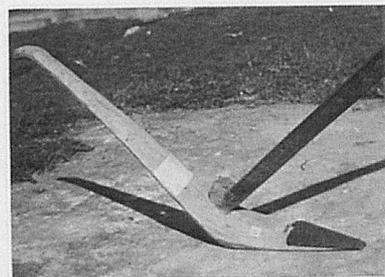


Fig.21 Plough No.21

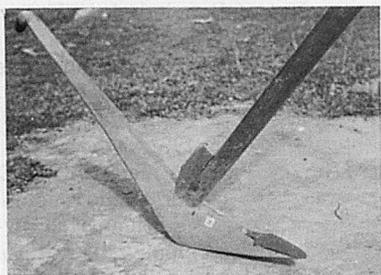


Fig.14 Plough No.14

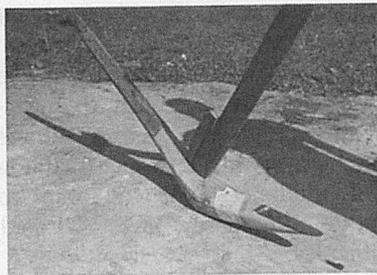


Fig.18 Plough No.18

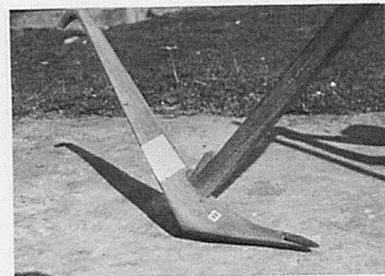


Fig.22 Plough No.22

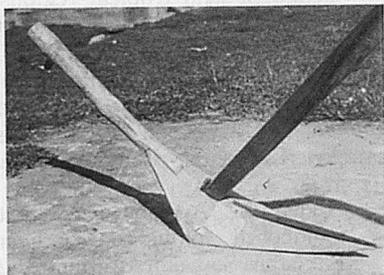


Fig.15 Plough No.15

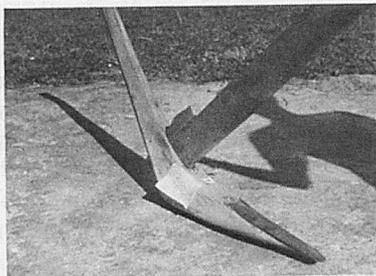


Fig.19 Plough No.19

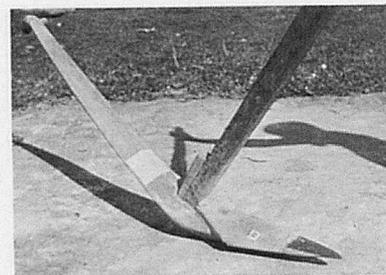


Fig.23 Plough No.23

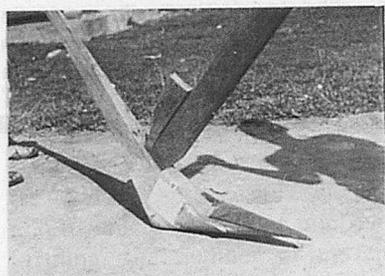


Fig.16 Plough No.16

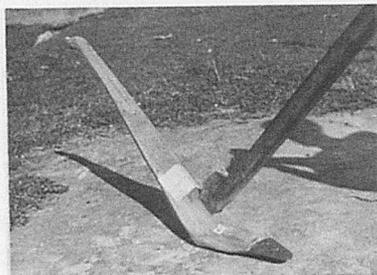


Fig.20 Plough No.20

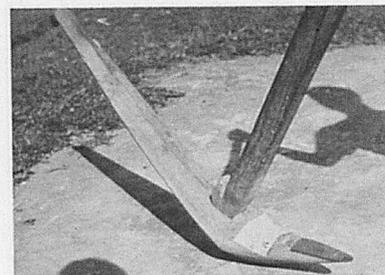


Fig.24 Plough No.24

Table 4. Captions in figure

Figure No.	Plough No.	Place of Collection	Figure No.	Plough No.	Place of Collection
1	P ₁	Brahman Baria	15	P ₁₅	Rongpur
2	P ₂	Potuakhali	16	P ₁₆	Khulna
3	P ₃	Netrakona	17	P ₁₇	Pubna
4	P ₄	Dinajpur	18	P ₁₈	Narayangonj
5	P ₅	Daudkandi	19	P ₁₉	Joydevpur
6	P ₆	Tangail	20	P ₂₀	Tarakanda
7	P ₇	Faridpur	21	P ₂₁	Fordabad
8	P ₈	Sylhet	22	P ₂₂	Fulpur
9	P ₉	Chittagong Hill Tracts	23	P ₂₃	Trishal
10	P ₁₀	Bogra	24	P ₂₄	Shambhuganj
11	P ₁₁	Chittagong	25	P ₂₅	Barishal
12	P ₁₂	Muktagacha	26	P ₂₆	Jessre
13	P ₁₃	Fulbaria	27	P ₂₇	Kustia
14	P ₁₄	Haloaghat	28	P ₂₈	Rajshahi

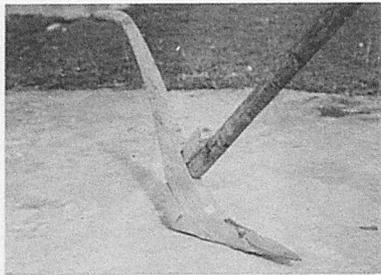


Fig. 25 Plough No. 25

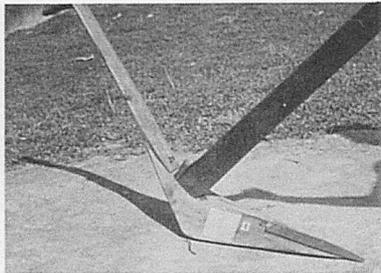


Fig. 26 Plough No. 26

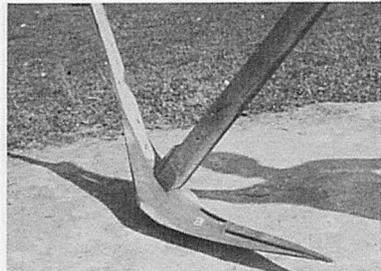


Fig. 27 Plough No. 27

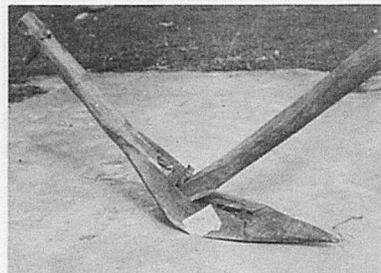


Fig. 28 Plough No. 28

Conclusion

Without changing the overall shape of the plough and incorporating only the missing parts such as moldboard and landside, the presently used plough can be used more efficiently. This incurs only a small amount of additional money and will make it easier to operate. To make life of the plough longer, the share point should be of treated cast iron. Sharepoint is the only part of the plough which is subject to maximum wear and tear. Village blacksmiths after proper training and guidance will be able to make all these parts without difficulty.


ACKNOWLEDGEMENTS

The authors are indebted to the farmers of Bangladesh for kindly supplying the ploughs and very much grateful to the Bangladesh Agricultural University for financial support during the course of this research work.

REFERENCES

1. ASEA Data ; crop machine use ; I. Draft and power requirements of Crop machines, Agric. Engg. Yearbook, 1954, pp.69.
2. Brammer, H ; The soil of Bangladesh in relation to agricultural development. Paper presented at a symposium on soil problems of Bangladesh. Organised by the soil science society of Bangladesh in Dacca, July 1975. (Unpublished).
3. Choudhury, M. S. U. Shortage of food grain and its solution. Published in Bangladesh Observer, April 16, 1972.
4. Harris Pearson Smith, A. E. Farm machinery and equipment, Fourth Edition, McGraw-Hill book company, INC. 1955. PP.90.
5. Hopfen, H. J. Farm implements for arid tropical regions. FAO. Agricultural Development Paper No. 67, 1960, PP. 158.
6. Kepner, R. A., Roy Bainer, E. L. Barger, Principles of farm machinery, Second Edition, The Avi Publishing Company, Inc. 1972.
7. Hoque, M. An improved light moldboard plough for East Pakistan, Souvenir, Agricultural Engineers Annual Convention, 1967.
8. Mckibben, E. G. Some fundamental factors determining the effective capacity of field machines. Agric. Engg., 11 : 55-57, Feb., 1930. ■■

Design and Development of a Paddy Winnower



by
A.P. Sharma
Agricultural Engineer
Koronivia Research Station
Ministry of Agriculture and Fisheries
P.O.Box 77, Nausori, Fiji

Introduction

A power-operated paddy winnower for the quick separation/cleaning of grains from the straw which has been threshed by any means is described. Essential features for its development include an air blower, air tunnel, screen, air regulating gate, a prime-mover (an electric motor or an engine) and structural work.

With the increasing speed of the green revolution in this country and acceptance of scientific and technical aspects of improved farming, the number of agricultural machines to reduce drudgery and to have timeliness of operation is increasing on the farms. Winnowing of paddy is one amongst such farming operations where the farmer is more concerned in converting manual winnowing into mechanized winnowing.

In the absence of a suitable winnowing machine farmers have been doing the laborious job of paddy winnowing by traditional methods which means waiting for the high velocity and winnowing the paddy threshed by conven-

tional method across the wind. This requires very heavy investment on labour cost which increases the cost of production. Thus under the scheme of low cost cultivation machinery research for mechanisation, a paddy winnower suitable to the local conditions is immediate need in Fiji.

In the year 1969 after the introduction of new varieties of paddy the production of paddy has gone up much higher compared to that of the past years. With the increase of yield and unfavorable weather, the farmers in paddy growing areas find handling of paddy winnowing in time difficult and uneconomical. This necessity has made a great demand for winnowers which can separate the fine straw from the threshed paddy and thus can give clean grains.

Materials and Methods

The main principle involved in the design of this machine is using a centrifugal force of air which comes from a fan driven by a suitable prime-mover. The

prime-mover at the moment being used with this machine is one horse-power electric motor coupled with a fan. The fan is enclosed in a tubular structure which blows off the air upward at a slating angle. The tubular structure is metallic and is covered from all the sides and at the bottom at one side it has a gate (adjustable type) for regulating the velocity of wind being sucked from outside by the fan. Most of the materials used in the fabrication of this machine are indigeneous. Iron sheets were used for the whole of structural construction and for frame work iron flats and angles have been used.

The winnower consists of the following functional components : air blower, air tunnel, screen, grain inlet, grain outlet, straw outlet, air regulating gate, and a prime-mover.

Through the grain inlet the grain containing the straw is fed on the screen which restricts the entry of the straw into the system. The air is blown through the tunnel from the fan which blows off the straw and other trashes and separates the clean grain.

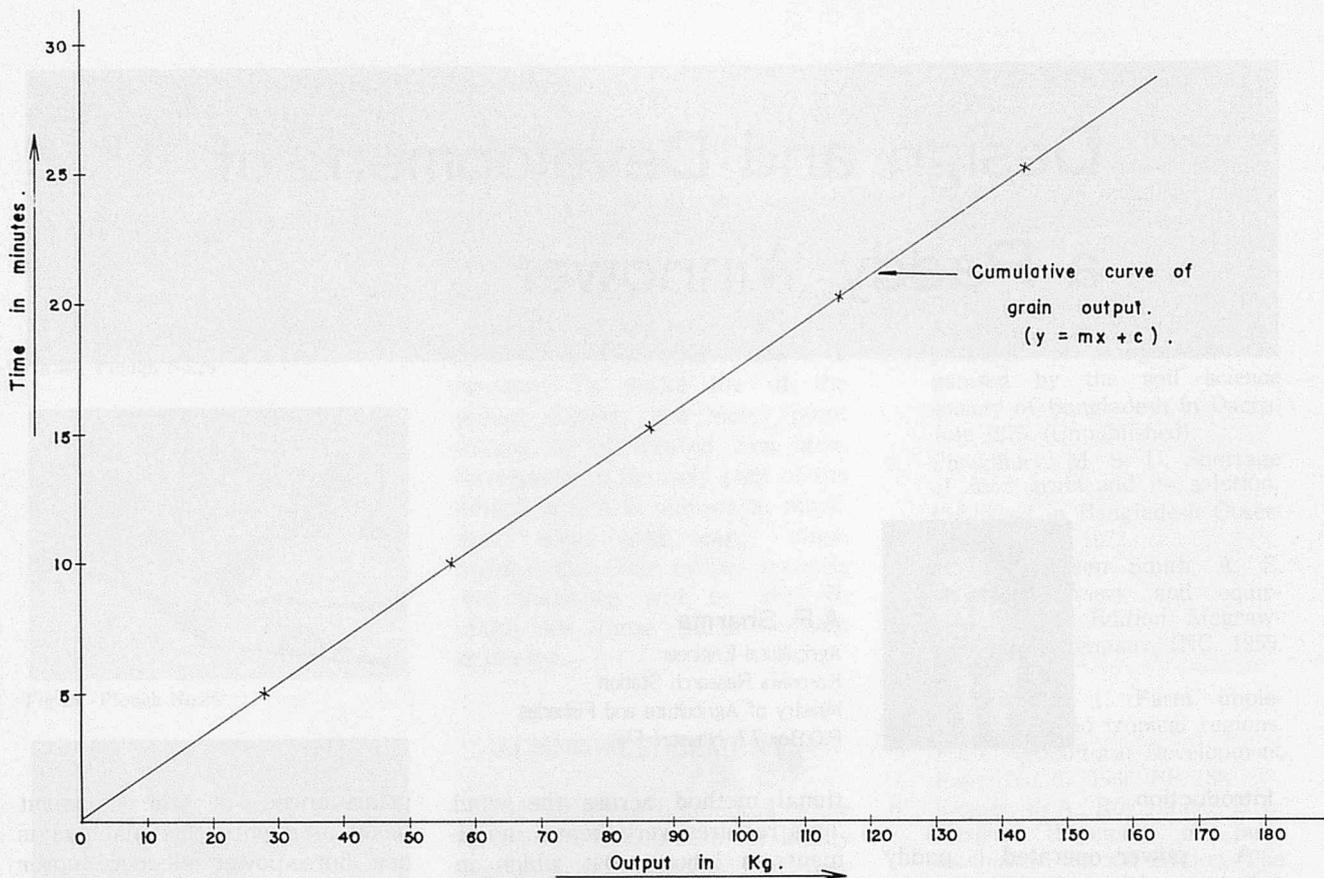


Fig.1 The performance characteristics of paddy winnower

The clean grain keeps on falling in a bag through the grain outlet. Straw and trashes are blown off through the straw outlet.

Results and Discussion

A series of tests were conducted with this machine on the winnowing of paddy both at station farm and at farmers field. The results found were quite encouraging. The table below gives the details of tests conducted.

From the results available it was observed that as an average the winnower has an output of 350 kgs/hr. of clean paddy under normal conditions of operation.

Table Winnower test

Test No.	Cumulative Time of Operation (minutes)	Output of Clean Grain (kg)
1	5	28.20
2	10	56.30
3	15	86.50
4	20	117.50
5	25	143.50

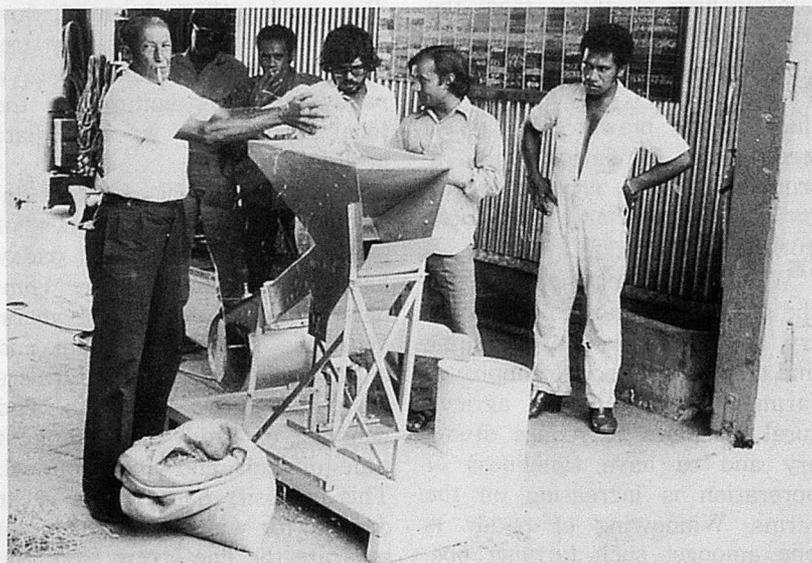


Fig.2 Paddy winnower

However, the output can be increased further if the rate of feeding is increased. Fig. 1 gives the straight line ($Y=mx+C$)

curve of Winnower output when these observations were plotted to study the performance characteristics of the machine. ■■

Development of a Single-Row Safflower Harvester

by
N.C. Shrivastava

Agricultural Engineer
Coordinated Project on Dryland Agricultural Research
Jawaharlal Nehru Krishi Vishwa Vidyalaya
College of Agriculture, Indore (M.P.), India

F.B. Dyck

Design Engineer
Reserch Branch, Agriculture Canada,
Swiftcurrent, Saskatchewan, Canada

Introduction

Safflower has acquired the reputation of being drought resistant and suitable crop for dry areas in Western M. P. where clay soils with their good water retention capacity hold enough soil moisture for successful cropping of safflower in rabi season. The deeply penetrating root is able to extract water from such greater depths than the majority of other crops.

Though this crop is promising, due to its spiny characteristics of the leaves, Indian farmers who still use a sickle to harvest the crop experience difficulty.

The use of large-sized harvesting machinery is limited in India because of small holdings, lack of capital and rare facilities for repairs.

Therefore, it was thought that a small harvesting machine that will reap safflower faster and

more efficiently than the traditional Indian sickle, and one that is within the financial reach of an average dryland farmer would be a most desirable and practicable advancement in the field of harvesting in India.

Design Considerations

Literature in the field of harvesting shows a direct jump from small hand tools like sickles to machines driven by animals and later by engines and tractors. No attention was paid to the more efficient use of manpower which is economical as well as readily available in India.

Previously, to solve the problem of harvesting, much importance was given either to technical considerations or to social infra-structure. This approach resulted in limited success.

Khanna (1975) suggested a system engineering approach in developing design criteria for a harvesting machine.

While considering the system engineering approach manpower was preferred over animal power or engine power to operate the harvester. For the machine to be cheap, simple and handy, bullock

power is not very useful.

Tremendous increase in the cost of gasoline limits the feasibility of use of gasoline engines in India.

Theoretical Investigations for Energy Requirements

A man normally works at a rate of 7 to 10 kg meter per second. Working continuously he produces about about 8 kg meter per second or roughly 0.1 H. P. (Hopfen, 1969).

Taking 50 per cent as transmission and other losses, the energy available to cut safflower stalk is equal to 0.05 H. P.

Fisher et al (1957) developed an equation which related the diameter of the stem of several forage plants with the energy required to cut the stem.

The equation developed for the stem of Reed canary at 76 per cent of moisture content is given below. For estimating the energy to shear one single stalk of safflower, this equation was used. However, special hardness factor of 10 was taken.

$$E = 0.106 - 0.210D + 20.4D^2$$
where E = Energy (inch pound)
D = Diameter of stem

*The machine was designed and fabricated at the Research Station, Research Branch, Agriculture Canada, Swiftcurrent, Saskatchewan, Canada, under the All India Coordinated Dryland Agriculture Research Scientists Training Programme jointly sponsored by the Canadian International Development Agency and the Indian Council of Agricultural Research.

(inch)

Taking the diameter of safflower as 0.5 inch and substituting the value in the above equation,

$$E = 0.425 \text{ ft. lb.}$$

Taking hardness factor 10 for safflower stem,

Energy required to cut safflower stem = 4.25 ft. lb.

Therefore H. P. = 0.008

Hence, it was considered that human power would be sufficient to operate this machine.

The harvester was designed on the basis of the following functional requirements :

- 1) It must be able to cut safflower stalk which is generally thick and hard.
- 2) It should maintain the height of cut at 7.5 cm.
- 3) It should windrow to either side of the machine.
- 4) It must be able to take quick turns in the field.

Description of the Machine

The single-row safflower har-

vester (Fig. 1) is a push type machine which is operated by human power. The frame which supports the ground wheels, components of power transmission system, the two circular blades and handles is made of rectangular steel tubing. Each groundwheel transmits power to the set of bevel gears which in turn transmits power to one circular blade through sprockets and chain.

Differential action is provided by driving each blade independently, thus allowing sharp turns.

Two pairs of handles are provided at the rear end of the machine to guide and push the machine.

The details of materials of construction are illustrated in Table 1.

The functional components of the machine are as follows :

- 1) Guide and flap : The guide on one side and the flap on the other side direct the safflower into the cutting unit.
- 2) Cutting unit : The cutting unit consists of two circular

saw blades, each of 15 cm in diameter. These two blades rotate in opposite directions. The ratio in bevel gears (3 : 1) and further ratio in the size of the front sprocket (3 : 2) gives a 4.5 times greater speed than the groundwheel.

- 3) Device to control height of cut : Two rubber tire wheels in each side are provided in front of the machine which help in maintaining the height of cut at 7.5 cm. throughout the harvesting operation.

- 4) Windrowing shield : As one of the main functions of the machine is windrowing, a windrowing shield made of galvanized sheet was provided above and behind the circular blades. The shield is inclined at an angle of 120° from horizontal. This shield essentially consists of two pieces which are welded at an angle 90° (Fig. 1). This shield and the hinged flap

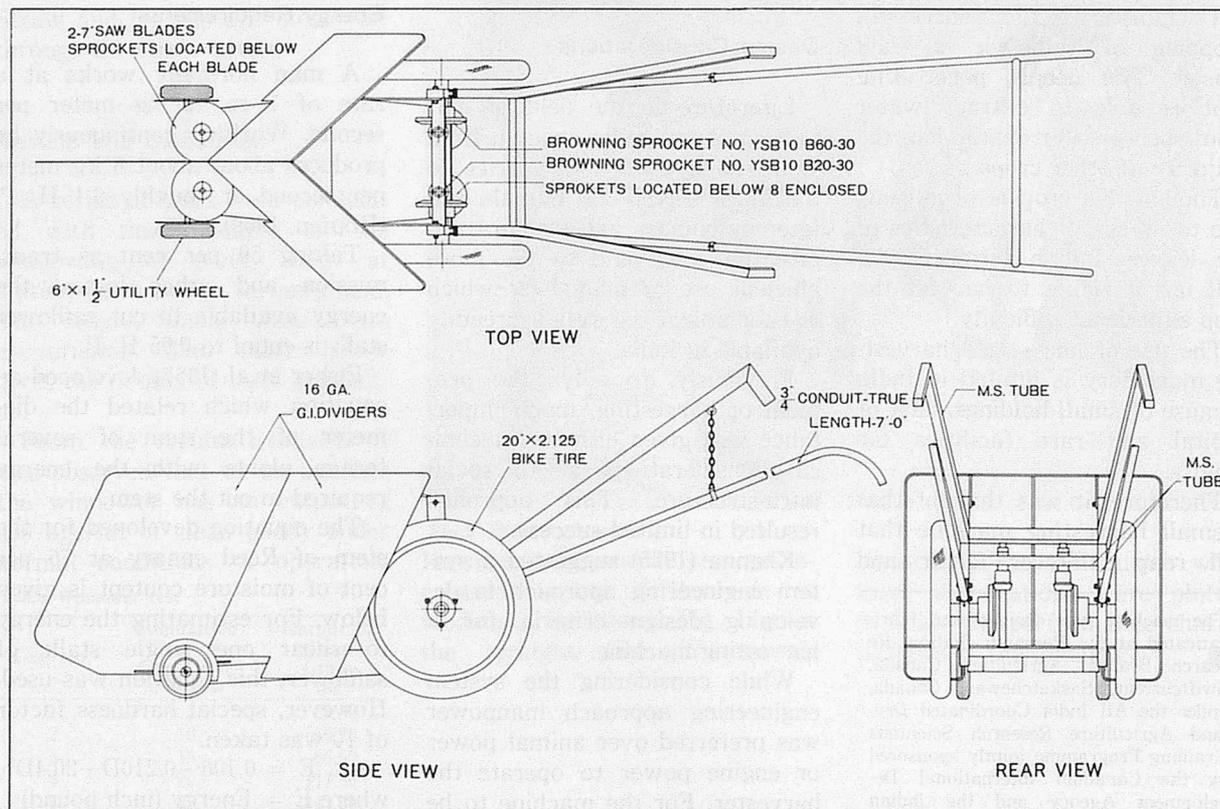


Fig. 1 The single row safflower harvester

make windrowing possible on either side of the machine. The flap is moved to the alternate side to change the windrow from one side to the other.

Test Report

Place : O.T.C. area, Agriculture College, Indore.

Crop : Safflower (IC 11839)

Row to row spacing : 45 cm.

Average plant

to plant spacing : 15 cm

Average diameter

of plant stem : 1.5 cm.

Soil and soil

conditions : Medium black soil, day soil conditions with wide and deep cracks.

Power required : Two-men power

Length of run : 5 meters

Cutting ability : Very satisfactory

Windrowing : Flow of cut material is sometimes found obstructed.

Height of cut : 7 to 8 cm.

Area covered : 10 hours/ha.

Remark : The design features built into the present machine reveal distinct possibilities, but

Table 1. Materials of construction

S. NO.	Part	Dimension	Number	Material
1	Bevel gear	Pitch diameter 6" No. of teeth 60	2	Steel
2	Bevel pinion	Pitch diameter 2" No. of teeth 20	2	Steel
3	Circular saw blade	7" diameter No. of teeth 180	2	Steel
4	Chain	5-3/4' long Roller chain	2	Steel
5	Chain tightner	18 teeth sprocket	2	Steel
6	Frame	19.5" steel tube 14.75" steel tube 30" steel tube	2 2 2	1' x 2" steel tubing 1' x 1 1/2" steel tubing 1' x 1 1/2" steel tubing
7	Front sprocket	30 teeth sprocket	2	Steel
8	Ground wheels	20" Diameter	2	Bicycle wheels with 20" x 2.25" tire
9	Guide	13 ft. long rod	2	Iron rod
10	Hinged flap	2' x 2'	1	20 gauge G.I. Sheet
11	Handles	(A) 42" steel tube 15" steel tube (B) 2' long 6-3/4' long	2 1 1 2	1' x 1 1/2" steel tubing 1' x 1 1/2" steel tubing 1" conduit pipe 1" conduit pipe
12	Rear sprocket	20 teeth sprocket	2	Steel
13	Small wheels	6" Diameter	2	Rubber tire wheels
14	Windrowing shield	2' x 2'	2	28 gauge G.I. Sheet

some changes are required. The machine represents a good base for future work.

REFERENCES

1. Fisher, David A., Kolega, J. J. and Wheeler, W. C. An evaluation of the energy required to cut forage grasses and legumes. Storrs Agricultural Experiment Station, College of Agriculture, University of Connecticut, (Progress Report No. 17). 1957.
2. Hoppen, H. J. Farm implements for arid and tropical regions. F. A. O. Agricultural Development Paper No. 91. Rome 1969.
3. Khanna, S. K. Design considerations of harvesting equipment in multiple cropping. Agricultural Mechanization in Asia, Vol. IV, No. 2. 1973. ■■

A Description of the Intergrated Rice-Processing Complex of the Kamol Kij Company, Ltd. Thailand

by Harry van Ruiten

Member, Technical Team
Southeast Asia Cooperative Post-Harvest
Research and Development Programme
SEARCA, UP Los Banos
College, Laguna 3720, Philippines

Introduction

The Kamol Kij Rice Processing complex in Bangkok is an unique example of technical intergration in the processing of paddy, having as main objective to make an efficient use of by-products directly or indirectly produced as result of the processing methods.

Through a chain of processing practices a more important range of commercial products could be produced, eliminating simultaneously the hazard of the disposal of useless waste.

The description refers to the applied processing cycle only without any reference to the economics involved.

The explanation given is of general and informative nature and is supported by a flow-chart.

The technical team of the Southeast Asia Cooperative Post-Harvest Research and Development Programme at SEARCA is grateful to Mr. Kamchai Iamsuri, Director of Kamol Kij Company, Ltd. for his cooperation in allowing the author to produce this workshop support material and for hosting the participants of the

workshop during a field trip to his integrated rice processing complex on 10th January, 1978.

Description

1. The main activity of the Kamol Kij Company, Ltd. is rice milling. The rice milling capacity is represented by three independent conventional type rice mills using under runner disc hullers for the de-husking and whitening-cones for the multipass whitening. The total paddy intake capacity of the three locally manufactured rice mills is about 400 ton per day for continuous operation. The two old mills have a paddy intake capacity of about 100 tons per day each. The capacity of the new mill is about 200 tons per day.
2. The paddy is locally purchased and delivered to the rice mill by boat or truck.
3. About 50 percent of the purchased paddy is processed without being parboiled.
4. The paddy to be parboiled is :
 - Soaked in hot water for about 2-4 hours.
 - Steamed in trucks (par-

boiled) for about 15 minutes.

—Dried on cemented sun drying floors or in mechanical driers of the L.S.U. type.

5. The sun drying floors and the mechanical driers are also used for the drying of paddy before storage, even when not parboiled.
6. The rice mill produces :
 - milled rice
 - bran
 - husks, and
 - impurities.
7. The milled rice is graded into :
 - headrice
 - large brokens
 - medium brokens
 - small brokens, and
 - brewer's rice.

All these five products are final products for marketing. However, the small brokens and brewer's rice can also be absorbed by the feed mill when the market price of these products is not attractive.

8. The bran of the rice mills is sent to the rice bran oil extraction plant. The extraction plant produces two important products namely :


* Presented at the Post-Harvest Workshop held in Bangkok, Thailand on January 10 to 12, 1978.

9. —The rice-bran-oil which is sold to the local edible-oil refineries and
—The defatted bran which is completely absorbed by the feed mill.
 10. The husks and the impurities coming from the three rice mills is burned in furnaces.
 11. The heat produced in these furnaces is used in steam boilers for the production of high pressure steam.
 12. This steam is used for
—heating of the soaking water in the process of parboiling.
—steaming (parboiling) of the paddy.
—source of heat necessary in the mechanical driers.
—rice bran oil extraction plant.
 13. In addition the steam can also be used to drive steam engines for the supply of energy to the rice mills, although recently this application has been abandoned.
 14. The black-ash from the furnaces is mixed with clay coming from fish pond excavation.
 15. This mixture is then pressed into hollow blocks by an extruder with a cutting device. These blocks have the size of bricks as used in the construction industry.
 16. These blocks are then heated in a kiln for the production of bricks. These bricks are sold at the local market.
 17. In these kilns, husks coming from the rice mills is slowly burned to complete combustion.
 18. Consequently, white-ash is produced, which is sold to the local industry.
 19. As mentioned under 9 the defatted bran coming from bran-oil extraction plant is processed in the feed mill.
- This feed mill can also absorb, if necessary, the small brokens and the brewer's rice produced by the rice mills. In addition, other feed components are necessary and locally purchased.
20. The feed, produced by the mill, can be locally marketed, but—
 21. This feed is also used in the poultry farm and the piggery operated by the company.
 22. The poultry farm produces eggs and broilers for the local market.
 23. The chicken manure is partly used as feed for the pigs and partly as feed for the fish in the fish ponds operated by the Company.
 24. The piggery produces pigs for the local market.
 25. The pig manure and partly the manure at the poultry farm is used as feed in the fish ponds.
 26. The fish ponds produce fish, which is locally marketed.
 27. The large fish ponds, for one year, are used as fish ponds and the next year as agricultural farm.
 28. Through this interchange and alternative use of ponds, the soil is kept fertile and diseases are kept under control.
 29. When used as agricultural farm, these farms produce
—paddy, sent to the rice mill for processing.
—maize, absorbed by the feed mill
—vegetables, locally marketed.
—bananas, locally marketed
 30. Rejected bananas are used as feed in the piggery.
 31. It is the intention of the Company to install a slaughterhouse for pigs. When this project will be implemented,
 32. The company will also install a processing packaging plant and
33. A cold storage plant in order to be able to meet local market requirements.
 34. The complex has been a disturbance for the neighborhood because of the large quantities of black-ash blown into the air through its five high chimneys.
 35. In order to improve environmental conditions, the company is now installing special plants having as objective to use the heat of the boiler fumes and to collect the fly-ash prior to blowing the fumes in the air.
 36. For this purpose a rotary is installed using the heat of the fumes to dry agricultural products.
 37. The cooled fumes then pass through a blower with water spray in order to catch fly-ash.
 38. The water with fly-ash flows into sink tanks.
 39. The collected ash mud is used in the brick mixing plant.
 40. The water, now free of ash, is recirculated through the blower.
 41. The boiler fumes, cooled and free of fly ash, are blown into the air.
- This completes the description of this integrated project.


Summary

Commercial final products for marketing : head rice (parboiled and parboiled) large brokens (same) medium brokens (same) small brokens (small) brewer's rice bricks white ash rice bran oil (not refined) feed for livestock pigs pork (after installation of the slaughter house) eggs broilers fish bananas and vegetables ■■

Process Development and Testing of Ceramic Materials from Rice Husk-Ash



by **A.K. Goyal**
Senior Research Assistant
Rice Process Engg. Centre



R.C. Maheshwari
Process Engineer
Rice Process Engg. Centre
Indian Institute of Technology, Kharagpur-721302, India

H.S. Maiti
Lecturer
Material Science Centre

Introduction

One-fifth of paddy by weight consists of rice husk which is the largest milling by-product of rice. Rice husk is being increasingly used as fuel to generate steam either for motive power or for par-boiling. Commercial utilization of rice husk and its resultant ash from burning will have a great impact on rice milling economy.

Rice husk contains 15 to 18 per cent silica concentrated in its inner and outermost surfaces. The white ash obtained by burning of the rice husk contains about 95 per cent silica. Silica is one of the basic raw materials in glass and ceramic industry. Besides glass in which silica is a principal ingredient, various ceramic articles like potteries, electrical porcelain, sanitary ware and other white wares contain considerable amounts of silica in their compositions. Silica used in ceramic industry is obtained from quartzite which needs to be pulverised to fine powder. The temperature required for firing various ceramic bodies is in the range of 1000-1300°C. The advantages of using rice husk ash are that (i) it is obtained in very fine

powder from and does not require further grinding; (ii) due to its more reactive nature, firing temperature is expected to be lower than those used at present in ceramic industry; and (iii) production of ceramic bodies will be much cheaper, if the liberation of heat energy from rice husk can also be utilized simultaneously.

Accordingly, the present project was taken up to find out the technical feasibility of preparing ceramic bodies from rice husk ash which may find its ultimate use specially for electrical insulators.

Materials and Methods

White ash was obtained by burning rice husk in open atmosphere in the form of heap. The white ash was mixed thoroughly with the other additives like sodium oxide, calcium oxide in the form of carbonates, boric oxide in the form of boric acid and alumina as such in different compositions as listed Table 1.

The flow process chart for making ceramic bodies out of rice husk ash is illustrated in Fig. 1. Raw materials were first fired

Table 1. Different compositions selected for testing their properties

Composition No.	Percentage				
	White ash	Na ₂ O	B ₂ O ₃	Al ₂ O ₃	CaO
1	75.0	—	15.0	5.0	5.0
2	80.0	10.0	—	5.0	5.0
3	87.5	7.5	—	2.5	2.5
4	75.0	15.0	—	5.0	5.0
5	95.0	—	5.0	—	—

at temperatures varying from 800 to 1000°C for different lengths of time (1-4 hrs.) in an electrically heated chamber furnace depending upon their specific compositions. Partially fused masses obtained after first firing were crushed and ground to fine powder in a ball mill. Those fine powder was sieved through a 212 microns and mixed with the binder (sodium silicate) very thoroughly. Then mixed masses were pressed to desired shapes at a pressure of 300-400 kg/cm² with hand operated hydraulic press. Pressed specimens were then dried at room temperature for a day. The final sintering of specimens was carried out at temperatures ranging from 700 to 900°C for various lengths of time (1-4 hrs.) and the specimens were then cooled gradually.

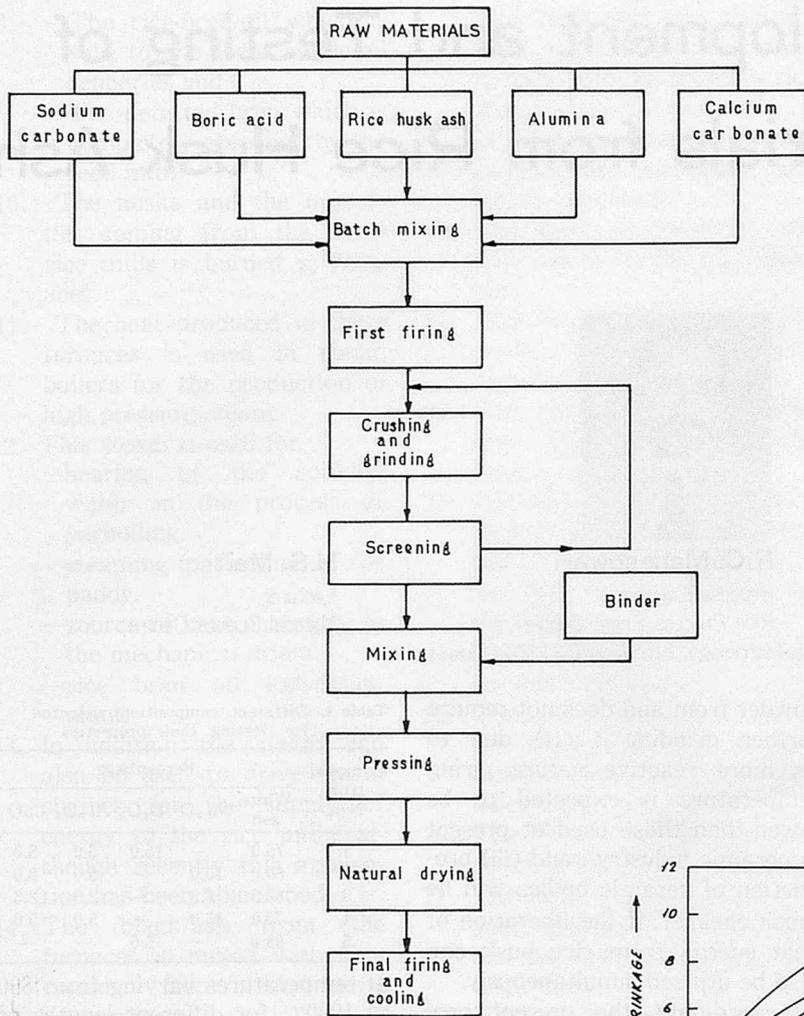


Fig.1 Process flow chart for making ceramic bodies from rice husk-ash

Result and Discussion

On the basis of preliminary experiments, the compositions 4 and 5 were discarded due to their very low and excessive high melting point. The prepared specimens from compositions 1, 2 and 3 were tested for their physical mechanical, electrical and chemical properties.

Physical Properties— The percent shrinkage, bulk density, and porosity of the prepared specimens were plotted against sintering temperature and time as shown in Figs.2, 3 and 4 for different compositions. In compositions 1 and 2, bulk density increased with the sintering

temperature but decreased at temperature beyond 775°C and 750°C, respectively. Shrinkage property behaved as that of bulk density while porosity has a reverse trend (Figs.2 and 3). According to the sintering and modification theories, bulk density should increase continuously with temperature as well as time with a resultant decrease in porosity. However, decrease in bulk density at higher temperature may be attributed to the fraction of liquid layer on outer surfaces of the specimens during the sintering process which prevented the escape of gases resulting in increase of the porosity.

In the case of composition 3, behaviour was quite different from compositions 1 and 2 as shown in Fig.4. Bulk density decreased with the increase of temperature up to 815°C, then increased with the increase in sintering temperature. In this case, first firing temperatures

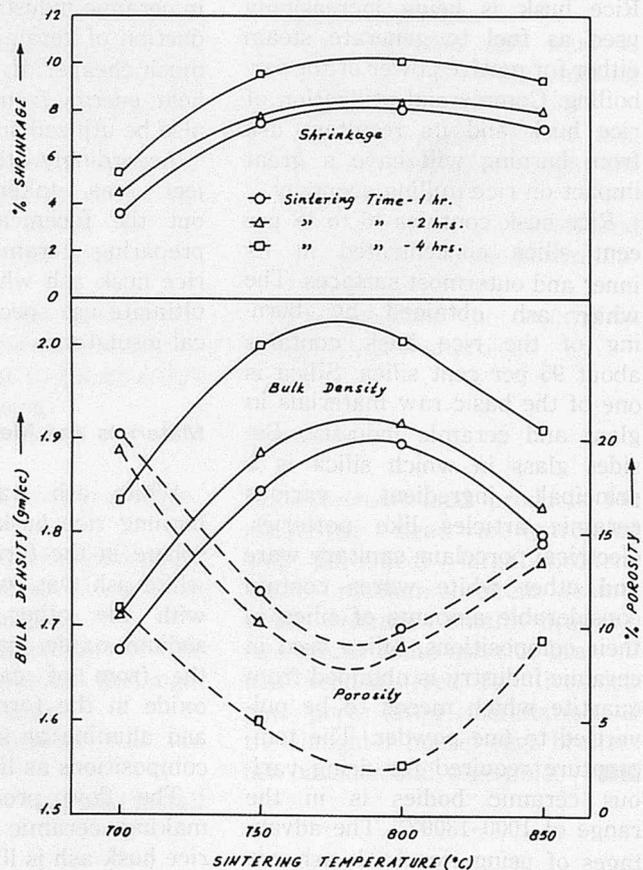


Fig.2 Sintering characteristics of specimens of composition 1

were not enough to drive out all the volatile matter because it contained less quantity of fluxes (12.5 percent) as compared to 25 percent and 20 percent for the compositions 1 and 2. No liquid layer on the top surface of the specimen was observed up to 1000°C for the composition No.3.

Mechanical Properties — Mechanical strength of ceramic bodies depends largely upon the internal structure, density, porosity and grain size of the specimen. Modulus of rupture and Young's modulus were determined by three-point bending test with the help of instron machine. These values are tabulated in Table 2. Modulus of rupture and Young's modulus varied from 215 to 360kg/cm² and 1.3 × 10⁵ to 3 × 10⁵kg/cm², respectively.

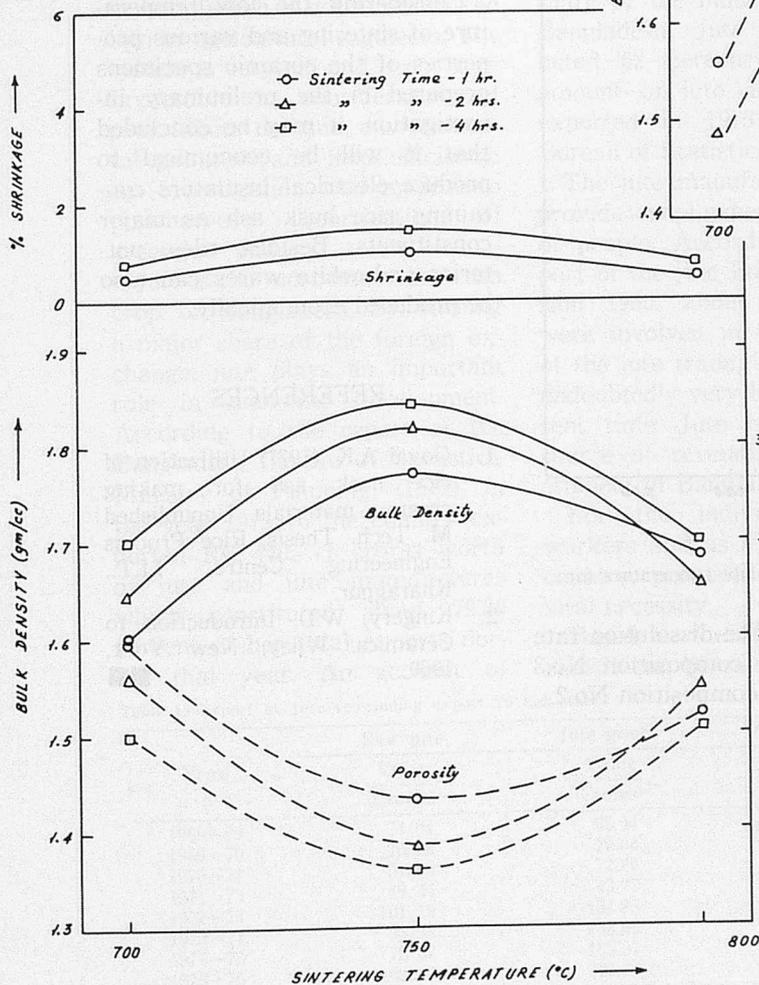


Fig.3 Sintering characteristics of specimens of composition 2

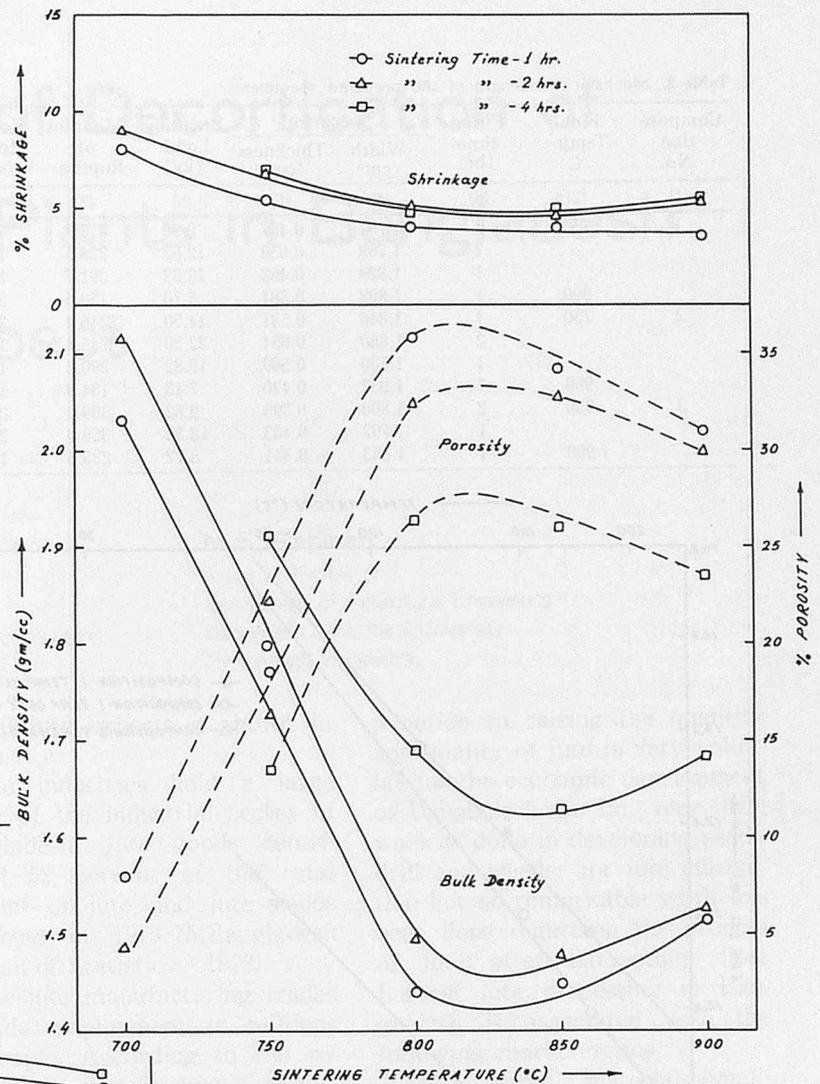


Fig.4 Sintering characteristics of specimens of composition 3

Electrical Properties — Electrical resistance of these ceramic specimens was determined by using simple Ohms Law with the help of electrometer and milliohm megameter. Resistivity of the compositions 2 and 3 is lower than composition 1 due to their electrolytic nature arising out of sodium ions. The resistivity decreased with increasing temperature and resulted in a linear relationship between logarithm of resistivity and inverse of temperature as shown in Fig.5.

Chemical Properties — The specimen prepared in the present investigation were highly resistive to normal atmospheric conditions and dilute mineral

Table 2. Mechanical strength of the prepared specimens

Composition No.	Final Temp. °C	Firing time (hr)	Specimen		Breaking Load (kg)	Modulus of Rupture	Young's Modulus $\text{kg/cm}^2 \times 10^5$
			Width (cm)	Thickness (cm)			
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
1	750	4	1.752	0.457	8.90	215.3	2.43
		2	1.789	0.559	12.62	228.5	1.53
		1	1.820	0.453	12.32	291.7	2.66
2	900	1	1.892	0.384	5.70	180.6	2.00
		4	1.846	0.531	14.50	246.4	2.88
		2	1.880	0.654	22.20	245.4	1.35
3	750	1	1.860	0.569	19.82	290.8	1.36
		1	1.932	0.420	7.12	184.8	1.58
	2	1.800	0.395	9.82	309.4	2.83	
	1	1.793	0.403	13.32	359.0	2.15	
	900	1	1.853	0.341	5.72	235.6	1.54

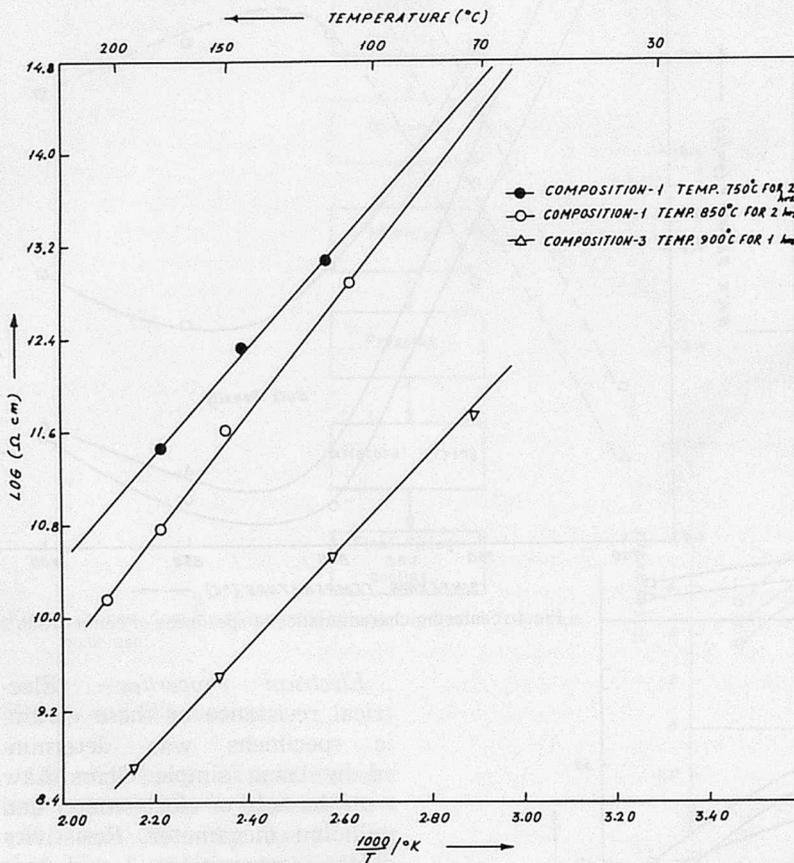


Fig.5 Logarithm of resistivity plotted against inverse of absolute temperature for different specimens

Summary

Ceramic bodies using the rice husk ash can be sintered at much lower temperature of 700–900°C compared to 1100–1300°C required for conventional porcelain. The density of prepared samples was 1.3 to 2.1g/cc compared to 2.2 to 2.5g/cc for commercial porcelain. Modulus of rupture of samples ranged between 215 to 360kg/cm² although slightly lower than the porcelain ceramic (200–600kg/cm²). Electrical resistivity of the samples containing no Na₂O is extremely high (7 × 10¹⁵ ohm cm at room temperature) and the material is very much suitable as electrical insulator. The material also has a high chemical resistance towards distilled water as well as mineral acids.

Considering the low temperature of sintering and various properties of the ceramic specimens prepared in the preliminary investigation, it may be concluded that it will be economical to produce electrical insulators containing rice husk ash as major constituents. Besides, tiles, potteries and white wares can also be produced economically.

REFERENCES

- Goyal A.K. (1977) Utilization of rice husk ash for making ceramic materials, Unpublished M. Tech. Thesis, Rice Process Engineering Centre, I.I.T., Kharagpur.
- Kingery, W.D. Introduction to Ceramics. Wiley, New York, 1960.

acids. However, an appreciable rate of dissolution was observed in very strong mineral acids like

18 N H₂SO₄. The dissolution rate was lowest in composition No.3 and highest in composition No.2.

Introduction of Decortication of Green Jute Plants in Bangladesh and Its Prospect

by

M.A. Mazed

Head of Division
Agricultural Engineering
Bangladesh Agricultural Research Institute
Dacca, Bangladesh

M.S. Rahman

Assistant Professor
Department of Agricultural Engineering
Bangladesh Agricultural University
Mymensingh, Bangladesh

Introduction

Post-harvest processing of jute in Bangladesh is not at all looked into by agricultural engineers. The system is very old and is not very favourable in consideration of peak labour demand, environmental pollution and field efficiency. An investigation was made into post-harvest decortication of green jute plants.

Jute is the most important cash crop of Bangladesh. By earning a major share of the foreign exchange, jute plays an important role in economic development. According to the report of the Bangladesh Bureau of Statistics, Ministry of Planning, (1978), in the year 1975-76 the country exported Rs. 440.71 crores worth of jute and jute manufactures which constituted about 79.30 percent of her total exports during that year. An account of

annual jute exports is shown in Table 1.

Jute industries hold a large share of the industrial sector of Bangladesh. Jute goods contributed 62 percent of the total amount of jute and jute goods exported in 1975-76 (Bangladesh Bureau of Statistics - 1978).

The jute manufacturing trades provide employment to millions of people. According to the report of the jute Enquiry Commission 1960, about 43,000 people were involved in various phases of the jute trade. This number is undoubtedly very high at the present time. Jute is also a good source of revenue for the Government of Bangladesh.

For the individual growers, workers and as a whole, for the country, production of jute is a vital necessity.

Based on the foregoing discussion it can be said that any con-

tribution to raising the quantity and quality of jute is very valuable for the economic development of Bangladesh. So far, very little work is done in developing seed-drill and weeder for jute cultivation but no remarkable work has been done regarding the process of jute after harvesting. Post harvest jute processing in Bangladesh is associated with the following characteristics :

- a) Considerable materials handling,
- b) Unavailability of suitable retting place and water for retting green jute plants,
- c) Seasonal peak labour requirement for retting and stripping,
- d) Low efficiency in the overall process,
- e) Unpleasant odor during retting,
- f) Enhancement of mosquito growth and spread of malaria.

Therefore, to avoid the above mentioned situations, it is justifiable to develop a machine by which the green ribbons can be separated from the green jute plants without breaking the stems.

Table 1. Export of jute (excluding export to Pakistan)

Year	Raw jute	Jute goods	Total
	Value (Crores)	Value (Crores)	Value (Crores)
1968-69	74.94	66.04	140.98
1969-70	76.58	77.04	153.62
1970-71	51.95	72.90	124.85
1971-72	49.45	43.27	92.72
1972-73	101.18	154.85	256.03
1973-74	93.98	158.65	252.63
1974-75	75.67	185.87	261.54
1975-76	162.87	277.84	440.71

Bangladesh Bureau of Statistics-1978.

Procedure

A machine was devised for decortication of green jute plants. In this process, the barks were stripped off from the butt ends of the jute plants first by hand. The stems were then passed through the spaces between the bobbins and the barks outside the bobbins. The barks were introduced through two horizontal rubber rollers which were held together by a steel frame. Gears were set at both ends of the rollers so that they rotate in opposite directions. There was also a sprocket at the end of the lower roller. A chain was fitted to connect this sprocket with the sprocket of a bicycle frame. A man sitting on the seat of the bi-cycle frame would paddle. Then the rotating motion is transferred to the lower roller and the upper roller.

The machine was tried experimentally in the laboratory and the results were obtained. In this method, the butt ends of the jute plants were stripped off by hand first. Jute stems were fed into the machine each time. It was found that one operator could ribbon an average of 15 stems per minute with the help of the present machine.

Results and Discussion

With reference to the above results of the device the whole operations in connection with post-harvest operation jute processing may be looked into and it can be observed that :

1. In Bangladesh and India, the operations involved in jute processing require the following man-days per acre (after Kirby, 1963) :
 - a) Harvesting bundling and carrying to the retting place 14 man-days
 - b) Making "jag" etc. 4 man-days
 - c) Stripping and washing 14 man-days

- d) Drying, grading and storing $3\frac{1}{2}$ man-days

Total = $35\frac{1}{2}$ man-days

If decortication by machine ribboning is introduced the requirement of manpower may be estimated as :

- a) Harvesting, and carrying to the machine 8 man-days
- b) Placing into the retting tank 2 man-days
- c) Washing 2 man-days
- d) Drying, grading and sorting $3\frac{1}{2}$ man-days

Total = $15\frac{1}{2}$ man-days

If the difference of 20 man-days is required for machine-ribboning of jute plants of an acre, then the minimum rate of ribboning may be calculated as follows :

No. of plants per acre (after Kirby, 1963) = 100,000

Therefore, the rate of ribboning will be $\frac{100,000}{20 \times 8 \times 60} = 10$ to 11 stems per minute.

In this context, the performance of the device was satisfactory, but it should be noted that the butt ends of the jute plants were stripped off first. The time taken for that purpose should also be taken into account. However, for stripping off the ribbons from the butt ends, a simple device may be designed.

2. The experiment utilized jute plants without branches, although actually, jute plants may be branched sometimes. The branching of jute plants is an adverse quality and the little amount of fibre-loss taking place during decortication may be compared with that taking place in case of hand separation of fibres from the retted jute plants.

3. Jute harvesting is highly seasonal. The total time for harvesting is 4 to 6 weeks. If the machine lies idle for the rest of the year, in next season, the machine may not be functioning well if care is not taken during idle period. This machine can be made by the village blacksmith

and can be easily dismantled and kept in care.

4. In some areas of Bangladesh, jute plants are harvested from under water. The machine is not very big and heavy, and may be used on the deck of a medium-sized village boat.

This experiment is a very preliminary stage in the field of jute decortication. Much research work remains to be done in the future to find a suitable decortication machine.

REFERENCE

1. Bradley, J. & Kirby, R. H. (1953-54) Report on investigations into the mechanized production of jute and jute substitute fibres. Colon. Pl. Animal Production. 3. 135-164.
2. French-Mullen, M. D. (1960) Experiments in the cultivation, harvesting and retting of jute in British Guiana. Tropical Science 1, 231-285.
3. Govt. of Pakistan : September, 1970. Central Statistical Office, Pakistan Key Economic Indicators ; Volume No.91. p-16.
4. Kirby, R. H. (1963) Vegetable fibres, Leonard Hill (Books Ltd. London.
5. Mazed, M. A.; Design of a device for decortication of urena lobata Fibre ; Report submitted to the Tropical product Institute, September ; 1975 (Unpublished). ■■

Statistical Modelling of Tapioca Drying in Thailand



by
B.N. Lohani
 Environmental Engineering Division
 Asian Institute of Technology
 Bangkok, Thailand



N.C. Thanh

Introduction

Good tapioca pellets can only be produced from good chips and to produce good chips, several important parameters have to be controlled, the moisture content being the most important of all. A maximum of 14 percent moisture content is acceptable for Thai tapioca chips except for the months of June and July when a maximum of 14.3 percent is preferred by foreign importers. High moisture content is not desirable because it constitutes a favourable medium for the growth of bacteria (2). Mahmud and Thanh (1) studied the parameters effecting the drying and pelletizing of tapioca chips to obtain good quality tapioca products. Their study provided a good amount of data on the performance of the various forms and sizes of tapioca chips on various drying media which included solar as well as artificial drying techniques. The present study used the data reported by Mahmud and Thanh (1) and established the various relationships between the parameters by conducting statistical analysis of the data.

Drying Technique

The data on the following drying techniques were analysed : cement floor drying, black cement floor drying, artificial drying (using a hot plate), shelf drier—a three shelved tray drier : upper shelf (chicken wire), middle shelf (bamboo) and lower floor (wood)

Shapes and Sizes of Chips

The tapioca chips of the following sizes and shapes as shown in **Table 1** were investigated by Mahmud and Thanh (1) and the data reported on those chips were used in this study.

Table 1. Shape and size of cassava chips

Shape	Size, cms
Circular CR ₁	D=4.5, T=0.5
CR ₂	D=4.5, T=1.0
Rectangular RT ₁	L=8.0, W=2.5, T=0.5
RT ₂	L=8.0, W=5.0, T=0.5
RT ₃	L=8.0, W=2.5, T=1.0
RT ₄	L= .0, W=5.0, T=1.0
Cubic CU ₁	L=1.0, W=1.0, T=1.0
CU ₂	L=2.0, W=2.0, T=2.0
Stripes ST	L=6.0, W=0.5, T=0.5
Slices SL	T=0.1-0.2

Procedure

The present procedure included a statistical analysis of the tapioca data between ambient and floor temperatures, drying hours and moisture content of chips of various shapes and sizes on different drying methods. Regression equations were also developed which predicted the behaviour of the data for their significance at a desired level of confidence.

Analysis and Results

The general trend of the data showed that a polynomial of the form $Y = a + b_1 X_1 + b_2 X_2 + \dots + b_n X^n$ could be fitted to predict the behaviour. Computer programs were thus written to fit a polynomial equation of any order and at the same time to plot the original and estimated data from the model. The computer program was run in IBM 370/145. The regression coefficients were tested for their significance at 95 percent by making analysis of variance and then performing the F-test.

Ambient and Floor Temperatures

Floor temperature (T_f) is highly correlated to the ambient temperature (T_a). A second degree polynomial represented the relationship between ambient and floor temperatures for all the drying techniques except for shelf drier (middle shelf) for which third order polynomial was found representative. The relations for the different types are given below :

Cement Floor

$$T_a = 11.71 + 0.632 T_f - 0.00256 T_f^2 \dots\dots\dots (1)$$

Black-Topped Cement Floor
 $T_a = 19.15 + 0.289 T_f + 0.0007 T_f^2 \dots\dots\dots (2)$


Shelf Drier

(a) Upper Shelf (chicken wire)
 $T_a = -38.9 + 3.56 T_f - 0.042 T_f^2 \dots\dots\dots (3)$

(b) Middle Shelf (bamboo-net)
 $T_a = -393.95 + 34.85 T_f - 0.946 T_f^2 + 0.0085 T_f^3 \dots\dots\dots (4)$

(c) Lower Floor (wooden)
 $T_a = -26.57 + 2.83 T_f - 0.0325 T_f^2 \dots\dots\dots (5)$

Equations (1) to (4) and the experimental data are plotted in Fig. 1 which shows that the floor temperatures of cement floor, black topped floor and shelf driers (upper shelf) are respectively 33.5°C, 35°C and 30.2°C when the ambient temperature is 30°C. The middle and lower shelf of the shelf drier, however, at the same ambient temperature reached temperatures of 29.5°C and 30.4°C,

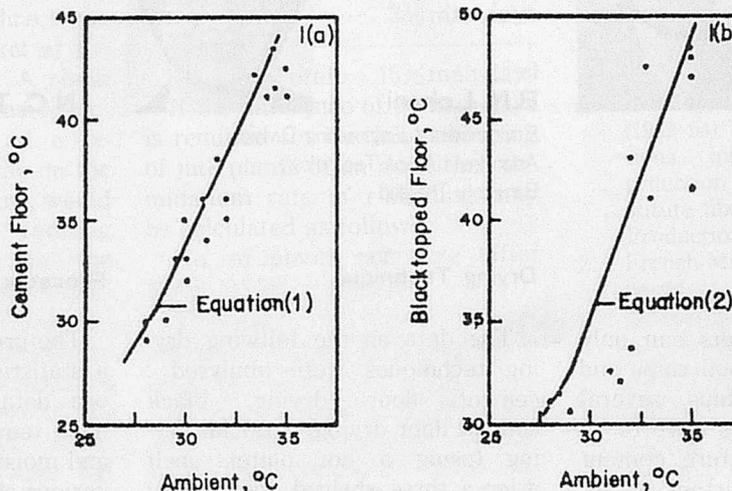

Note : Not all the experimental points are plotted for Figs 1(a) and 1(b)

Legend:
 • Experimental Data
 — Fitted Regression Line








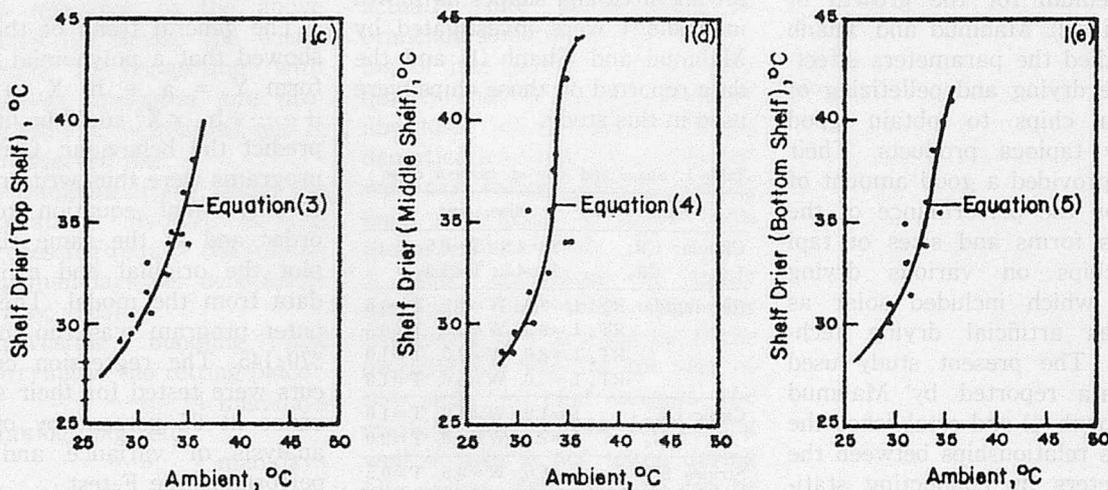


Fig.1 Ambient vs Floor Temperatures for Cement Floor, Black-topped Cement Floor and Shelf Drier

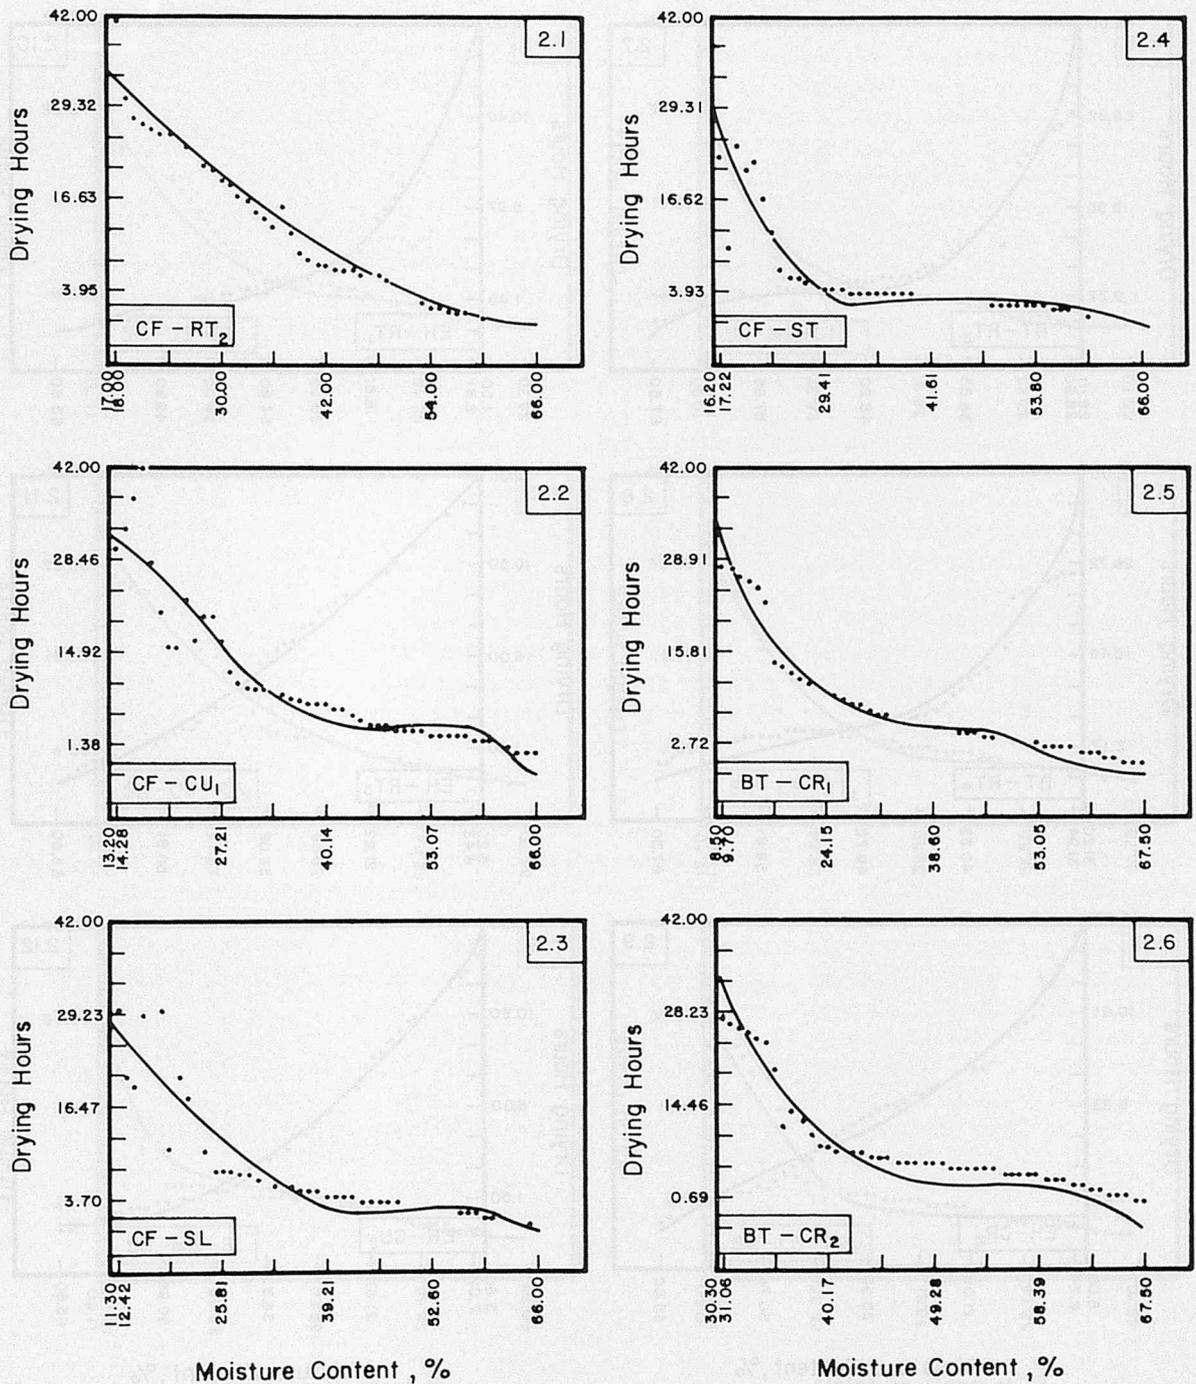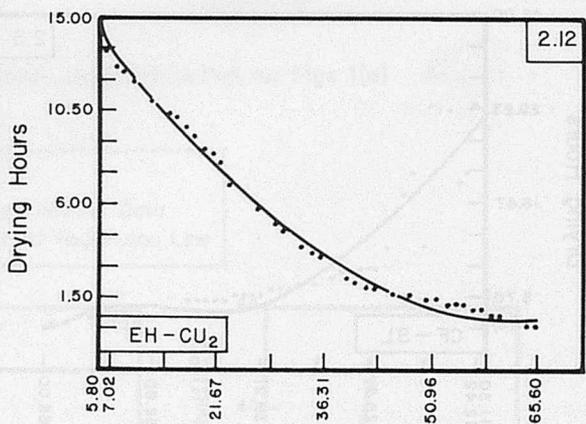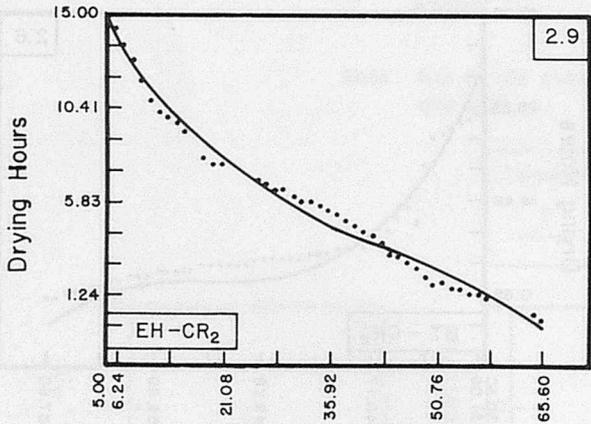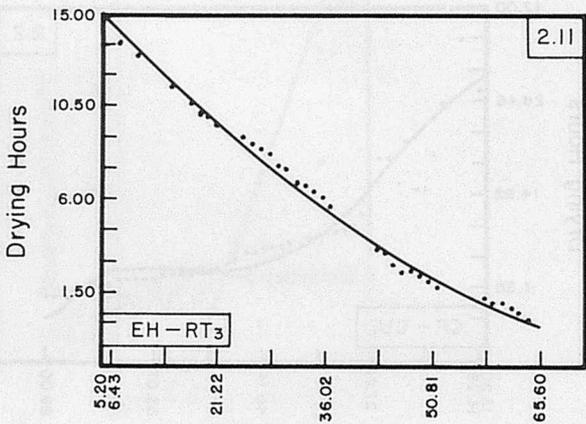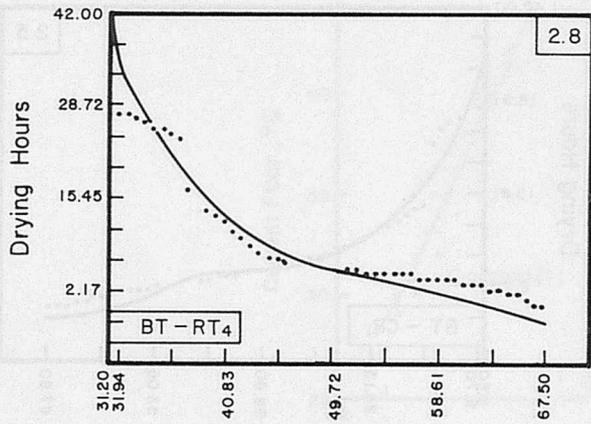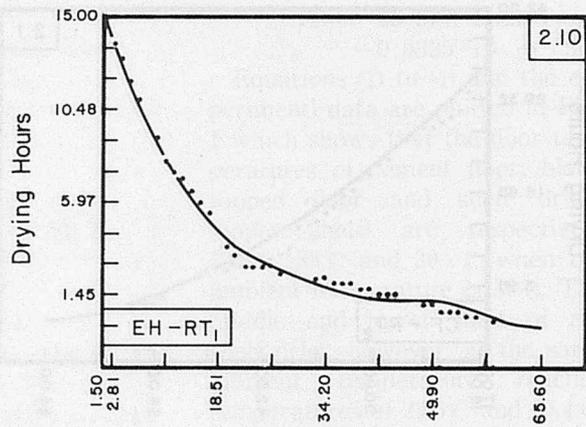

Legend: BT = Black Topped Floor
 CF = Cement Floor
 EH = Electric Hot Plate
 = Experimental
 — = Fitted Curve
 SH-US = Shelf Drier Upper Shelf
 SH-MS = Shelf Drier Middle Shelf
 SH-LS = Shelf Drier Lower Shelf

Fig.2 Observed Experimental Date and the Fitted Curve for Some Cases

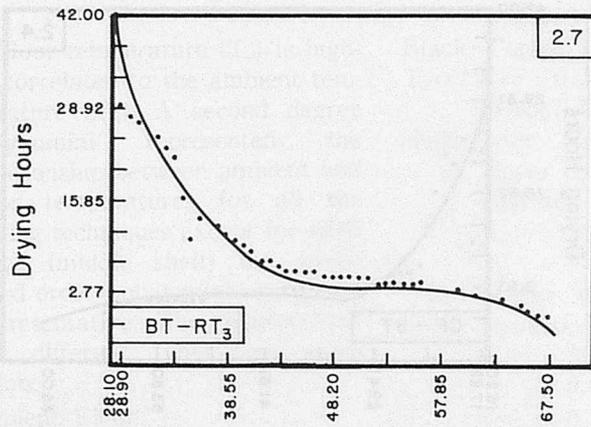

Moisture Content, %

Moisture Content, %

Fig.2 (Continuation)

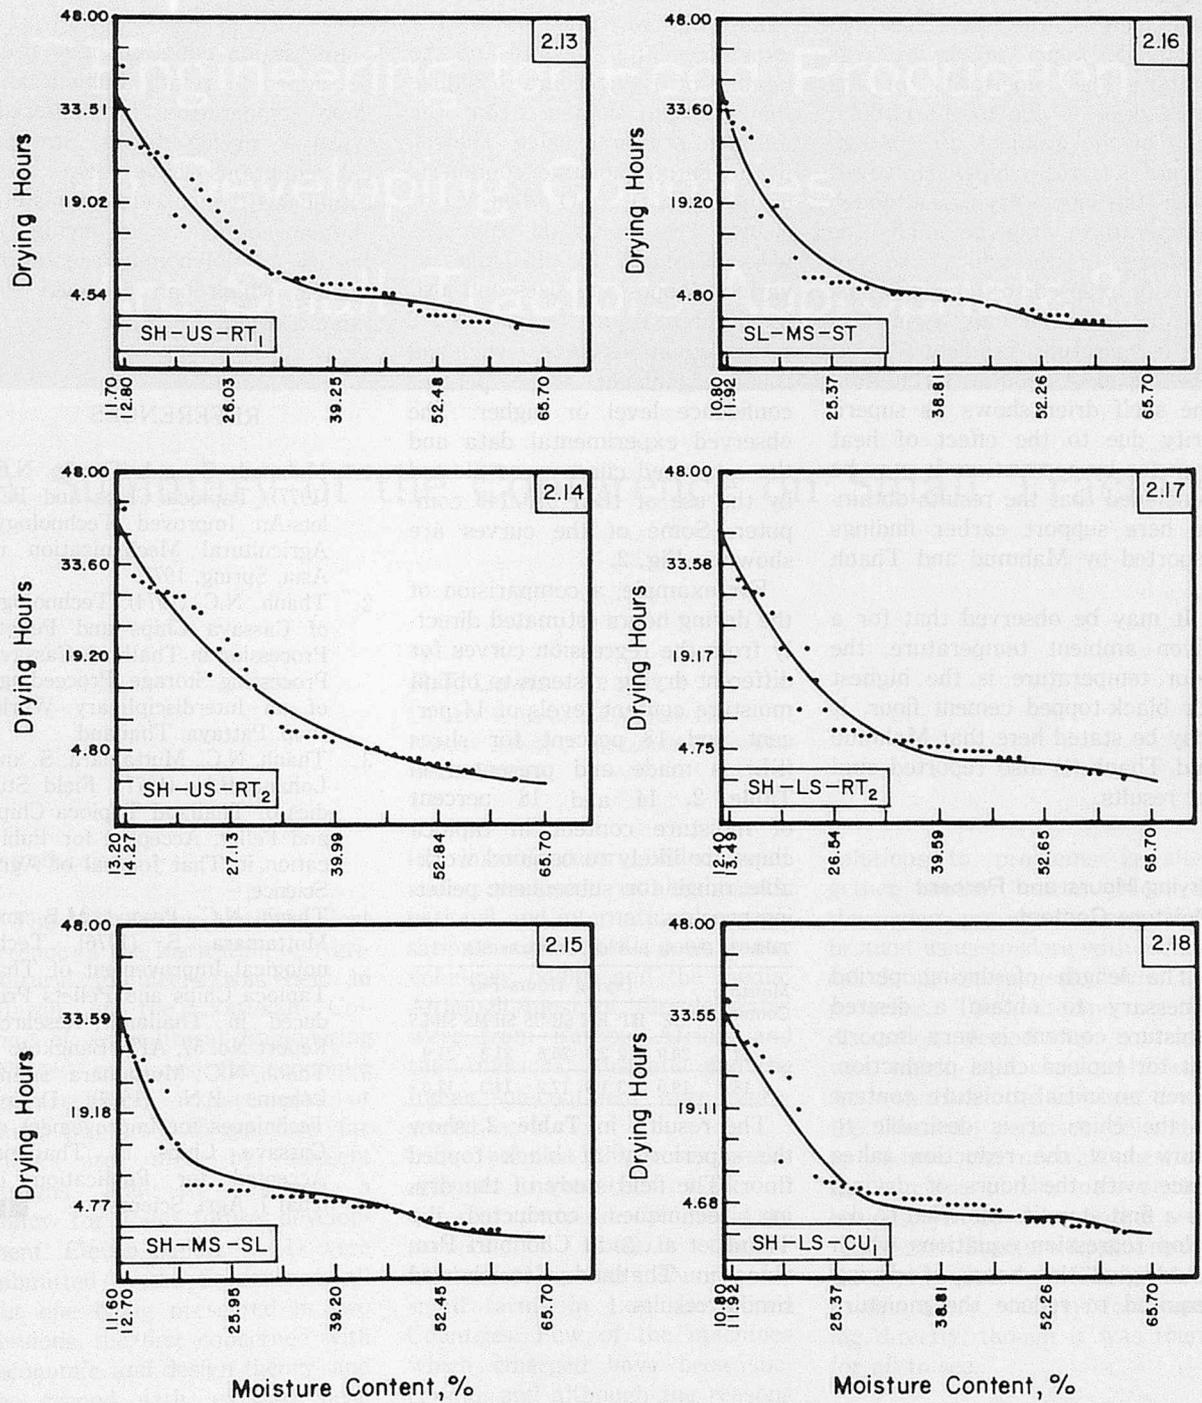


Fig.2 (Continuation)

respectively. However, the performance of the shelf drier in terms of hours of drying was better. The superiority of the shelf drier is due to the circulation of the ambient air through layers of the chips. However, with the floor drying, although temperature may be high, the surfaces of the chips are not equally exposed to the sun's rays. As drying is not only a function of temperature gradient but is also dependent upon air circulation the shelf drier shows its superiority due to the effect of heat transfer by convection. It may be concluded that the results obtained here support earlier findings reported by Mahmud and Thanh (1).

It may be observed that for a given ambient temperature, the floor temperature is the highest for black-topped cement floor. It may be stated here that Mahmud and Thanh (1) also reported similar results.

Drying Hours and Percent Moisture Content

The length of drying period necessary to obtain a desired moisture content is very important for tapioca chips production. Given an initial moisture content of the chips, it is desirable to know how the reduction takes place with the hours of drying. As a first step, it was tried to develop regression equations which could give the hours of drying required to reduce the moisture

content of the chips to a desired value. Let M_c and D_i be the moisture content desired and the number of drying hours to reduce the moisture content from the initial to a desired value. That is, if the initial moisture content is 65.0%, then $D_i = 0$ when $M_c = 65.0\%$. The regression equations were developed for the chips of various shapes and sizes and also for different drying techniques.

The equations were tested and found significant at 95 percent confidence level or higher. The observed experimental data and the estimated curve were plotted by the use of IBM 370/145 computer. Some of the curves are shown in Fig. 2.

For example, a comparison of the drying hours estimated directly from the regression curves for different drying systems to obtain moisture content levels of 14 percent and 18 percent for slices (SL) is made and presented in Table 2. 14 and 18 percent of moisture content in tapioca chips are likely to be good workable range for subsequent pelleting process.

Table 2. Drying periods for slices(SL)

Moisture Content, %	Drying Hours For						
	CF	BT	EH	SH-US	SH-MS	SH-LS	
14	20.9	10.2	2.9	20.8	21.3	21.9	
18	19.0	7.3	1.6	17.2	14.3	12.0	

The results, in Table 2, show the superiority of black topped floor. The field study of the drying techniques conducted by Thanh et al. (3) at Chonburi Province in Thailand also showed similar results.

Conclusions

Regression equation have been developed to relate ambient and floor temperatures for different types of drying media. Statistical equations have also been established which relate moisture content and hours of drying by the use of polynomial regression models which can be used for tapioca drying.

REFERENCES

1. Mahmud, Z and Thanh, N.C. (1977), Tapioca Chips and Pellets-An Improved Technology, Agricultural Mechanization in Asia, Spring, 1977.
2. Thanh, N.C. (1974), Technology of Cassava Chips and Pellets Processing in Thailand, Cassava Processing Storage, Proceedings of an Interdisciplinary Workshop, Pattaya, Thailand.
3. Thanh, N.C., Muttamara, S. and Lohani, B.N. (1977), Field Studies of Thailand Tapioca Chips and Pellet, Accepted for Publication in Thai Journal of Agri. Science.
4. Thanh, N.C., Pescod, M.B. and Muttamara, S. (1976), Technological Improvement of Thai Tapioca Chips and Pellets Produced in Thailand, Research Report No. 57, AIT, Bangkok.
5. Thanh, N.C., Muttamara, S. and Lohani, B.N. (1977), Drying Techniques for Improvement of Cassava Chips in Thailand, Accepted for Publication in Thai J. Agri. Science. ■■

Engineering for Food Production in Developing Countries — Are Small Tractors Appropriate ?

A Summary of the Conference on Small Tractors

by

R.T. Lewis

Lecturer in Agricultural Mechanization
National College of Agricultural Engineering
Silsoe, Bedford
U.K.

Introduction

The 1978 Spring National Conference of the Institution of Agricultural Engineers was held in March at the National College of Agricultural Engineering (NCAE) to discuss the economic and technical requirements of small tractors ; to see how far these are met by present designs and to propose a policy for their future development. Eleven papers (1-11) were submitted to the Conference, all but one being presented in two sessions, the first concerned with 'economic and design theory' and the second with 'existing designs'. The third and final session was a discussion forum entitled 'How the Present Problems May be Overcome'.

The seriousness with this subject is taken was mirrored by nearly 200 delegates representing a wide range of organisations and countries. The organisations included many of Europe's trac-

tor manufacturers, educational and research establishments, national and international organisations, agricultural consultants, voluntary bodies and the media. Although most of the delegates were from Europe, Africa, and the Americas, Australia and the Indian sub-continent were represented too.

In the last 20 years many attempts have been made in different parts of the world to produce a cheap, effective mechanical power source for small farms in Less Developed Countries. Few of the machines which emerged have been successful, and although the reasons for their lack of success were documented we have still not absorbed the lessons of failure well enough to enable us to overcome them. If we had, this conference would not have been necessary!

Conferences of this kind present information very effectively, but the identification in discussion of

solutions to problems is altogether another matter. Most of the papers presented successfully brought us up-to-date with technical detail or suggested new approaches. The outcome of the discussion period, by contrast, was much less clear. Although Ar. von Holst did his best from the Chair to persuade delegates to answer the neutral question, the outcome of the main contributions was to ask another was "Are Small Tractors Appropriate" the right question? The answer to this query was not forthcoming directly, though it was there for all to see.

Session I. Economic and Design Theory of Small Tractors

It was apparent through the conference that delegates were happy to define a "small tractor" in one sense as a machine whose nominal engine power output was less than 15 kW (20h.p.) That left

plenty of scope for variations in design, capability and cost as we were to hear.

The first paper (1) 'Economic Aspects of the Introduction of Small Tractors in Developing Countries—A Philosophy for Small Tractor Development' was presented by Steve Pollard, Economist in the Overseas Department of the National Institute of Agricultural Engineering (NIAE). Pollard and his co-author set out to be provocative. They thought it was generally agreed new technologies for Less Developed Countries (LDCs) must be both appropriate and acceptable in terms of operational and technical suitability, the particular socio-economic environment, and the resources and aspirations of its members. After defining the main attributes of the "Small Tractor" (here not including single axle tractors) they suggested that it had failed to answer the LDCs need for more farm power. The main reasons for this, they thought, were :

1. Lack of a multi-disciplinary approach to the development of the machine, with little or no consideration of the importance of LDC rural sociology, peoples and politics, agricultural credit, farm management, tropical crops and livestock, soils, machinery manufacture, and so on.
2. More specifically, the small proportion of LDC farms in the 6 to 8 ha size range for which many small tractors have been designed : the vast majority (according to admittedly limited data) are much smaller
3. In extensive (of subsistence) farming systems, the vicious circle of low yields and low prices, which greatly restrict or prevent the farmer from investing in any expensive technology.

Many other factors were discussed in an excellent paper. The authors concluded by repeating

their philosophy, admittedly not new, that the prime need is for a simultaneous multi-disciplinary approach to agricultural development, coupled with the understanding that economic development takes time, is complex, and requires unique solutions for each country and region.

In the second paper (2) Giles Cattermole discussed the 'Economic, Political and Social Aspects Governing the Success of Small Tractors'. Cattermole looked first at the size gap between the smallest tractors in volume production and the LDC small farm need ; a gap which has widened since the day of the Ferguson TE20 in the late 1940s and has now resulted in most major tractor manufacturers entering into marketing agreements with Japanese tractor manufacturers to extend their own ranges downwards. He looked at the production of small tractors (again excluding single axle types) in Third World countries and concluded that the total of about 10,000 units/annum fell far short of the 1973 UNIDO predicted of 52,000 in 1975 and 181,000 in 1980. Pollard and Morris's contention that small tractors had failed to meet the demand would seem to have been confirmed.

Cattermole went on to discuss the effects of economic, social and cultural, and political factors affecting the uptake of small tractors. From his discussion he then drew up a country 'Profile' of the conditions likely to favour the adoption of small tractors. A comparison of this profile with the observed characteristics of many LDCs then showed, Cattermole considered, that non-technical factors rendered the small tractor an entirely inappropriate answer to the mechanization need in many cases, a conclusion which reinforced the arguments in the first paper.

Peter Crossley followed with

his paper (3) entitled 'Theoretical Design of Small Tractors', which to some extent contradicted Pollard and Morris's contention that engineers about a 'blinkered' or one-dimensional approach to design problems of this kind. Crossley briefly considered the characteristics of LDC small farm systems, and identified the need for an increase in available power from 0.04 to 0.4 kW/ha in combination with other inputs. He identified the average farm size as about 3 hectares, and agreed substantially with Pollard and Morris about the integrated approach which should be used to identify an 'Appropriate' technology for increasing the power available on farms.

Crossley went on to discuss in detail the design factors relevant to a small tractor ; engine type, transmission, tractive performance, implement attachment and control, stability and operator comfort. He then considered some economic factors, suggesting that a small tractor should be economically viable where :

1. its output in basic tillage and weeding operations in conjunction with other inputs produced extra income in excess of costs
- or 2. tractor costs were covered by the production value from previously uncultivated land whose use was socially acceptable.

The basic design that Crossley proposed from his detailed considerations was based on a work rate in primary tillage of 0.5 ha/day. His parameters were :

mass.....	1 tonne
drive tyres	2 size 7.50-16
engine power	9 kW

Such a tractor, he suggested, would be capable of carrying out one primary and three secondary tillage operations on a holding of about 30 ha, at an operational cost within the range £ 32 to £ 60 per ha. This tractor was designed for direct traction in LDCs. Crossley emphasised that

careful prior investigation of the economic and social environment was vital to ensure that the concept was viable, and that successful operation would, as always, be dependent upon satisfactory technical, economic and extension infrastructures.

The fourth paper, by Francisco Murillo-Soto and Manuel Aguirre-Gandara, discussed 'Large Versus Small Tractors from an Economic Standpoint in Mexico'. The authors reviewed the factors affecting the mechanisation of small farms, many of about 10 ha, in Mexico and arrived at the same conclusions about the need for a fully integrated approach as previous speakers. One interesting difference in the economics of large and small (20kW) tractors in Mexico is that the smallest they have, the Sidenia (Belarus) T-25 costs less per kW than tractors of twice and four times its power output. Add to this that doubling or quadrupling the nominal power output of a tractor does not necessarily multiply up its work output in the same proportion, and the authors considered that in their case the small tractor should be more cost-effective than larger ones.

The authors presented a fairly standard method for analysing the cash flow in a farm business in relation to the machinery and cultivation methods used, so that cost/benefit analyses or internal rate or return criteria could be used to select the best technical least cost system of mechanising. They rightly reminded us that the decisions resulting from such an analysis would only be as the information put into it, and commented that in Mexico, as in so many countries, there was a serious lack of the necessary data.

This presentation concluded with a short film which compared mule powered tillage with a 3-wheeled small tractor under development in Mexico. This tractor was not mentioned in the

paper; most interestingly it appeared to be very similar to the 3 wheeler design developed at the National Institute of Agricultural Engineering (NIAE) about 18 years ago, and subsequently tested in a number of tropical environments including the then Northern and Western Regions of Nigeria. The main features of the NIAE tractor were its single large driving wheel at the rear, two small wheels and toolbar at the front with tiller type steering, rear mounted engine of about 7kW, simple and robust transmission alongside the centrally placed operator. It was a logical design, but problems of cost and effectiveness prevented it from being accepted at that time.

Paper five (5) by Peter Barton on 'Changes in the Demand and Design of Small Tractors During the Period 1960 to the Present' was not presented. The paper comments briefly on some of the experimental and production of small tractors during the period and then goes into more detail on the sophisticated Japanese small tractors of conventional layout, and discusses the history of development of single axle tractors. A number of appendices give details of the production, cost and use of small tractors and related equipment in developing countries for which data is available.

The first session concluded with a paper (11) by Frank Inns 'Operational Aspects of Tractor Use in Developing Countries—a Case for the Small Tractor'. Inns suggested that tractor operating costs in developing countries were likely to be at least twice the level experienced in industrialised countries, due to lower serviceability and increased costs of repair. He developed his thesis by extending from accepted developed country tractor operating cost figures to LDC costs using a number of multiplying factors based on the differences in infrastructure and costs between

the two environments. This was a hypothetical argument which would be tested against actual data. The major cost differences suggested, apart from the overall ratio of 1 : 2 in favour of developed countries, are shown in Table 1.

Table 1. Percentage of some tractor operating costs in developed and developing countries.

Component of costs	Developed	Developing
Labour	42	2
Repairs	8	53

Inns used these figures to suggest that a suitably designed small tractor, made in the country of use, was the solution to the cost problem. Spare parts would also be locally made and therefore cheaper and readily available, he argued. Furthermore the simple tractor would enable slow progress over a broad front in agricultural development to go hand in hand with intensive and perhaps highly mechanised plantation type enterprises. The design rationale for the tractor would of course depend on its integration with viable agricultural production systems.

At the end of the session we had been reminded of all the factors which had to be considered in the analysis and design processes for successful farm mechanisation in LDCs. Several different approaches to these processes had been described, but at the same time the scarcity of accurate data relating to the socio-agro-economics of small farm production systems had been high-lighted.

Session 2. Existing Designs

The conference now went on to hear five papers on existing tractor designs in relation to LDCs.

Arno Gego gave a paper (6) 'Aspects of Size and Concept of Tractors for Tropical Agriculture'. Gego, as one would expect of a Deutz engineer, was committed to the logic and compara-

tive cost advantage of tractors larger than 15 kW in nominal power output. He argued that sharing the use of larger machines was the only economically viable answer to the mechanisation of small farms, giving as examples the characteristics of paddy cultivation in Asia, cultivation of irrigated areas in Egypt, and cultivation of hard dry soils in Africa. Gego's remarks would apply to larger farms, or pooled farms, but did not relate to the problem faced by the Conference. No reference was made to the lack of capital, small fragmented plot sizes, mixed cropping and all the other problems, nor indeed to the pronounced lack of success of machinery sharing or co-operative machinery enterprises in most LDCs. Only in his last but one paragraph did the author admit that most farms would be from 1-10 ha and that these could not use even the smallest tractor of 16 kW to full capacity.

The next paper by Alan Catterick (7) described the 'Tinkabi System' one of the rare stories of gradually growing success. Four hundred units are now in use and have proved financially viable among progressive small scale farmers, mostly in Swaziland. Early models were sold at subsidised cost, but it was not clear whether this was still the case.

The design parameters for the Tinkabi were drawn up after consultation with "...countless people engaged in agriculture throughout the (African) continent...". The initial design concept has changed little. Important details have been refined and improved to correct teething troubles. A rectangular chassis with a wheel at each corner, fuel and hydraulic oil tanks built in, carries the engine and fluid pump. A hydraulic motor transmits power to each near driving wheel. The frame supports a load carrying platform at the front when required, and a mechanical

lift system at the rear. A range of implements has been built for use with the tractor, those needed for essential operations.

The Tinkabi was extensively field tested in Africa and put through a standard tractor test at the NIAE. Summaries of these reports are presented in the paper. There is no doubt that the tractor is not perfect; there are problems with the mechanical lift, ploughing with an offset body is difficult, and the maximum noise level to which the operator is subjected is very high. But in overall terms the tractor is successfully contributing to the development of agriculture, albeit in a small way.

The service contract operated by the manufacturing company has had a considerable part to play in the success of the tractors. Servicing is done in the field by vocationally trained mechanics. Major units can be tested, also in the field, by the same mechanics using simple procedures. Units which fail their test are replaced with exchange units, the faulty assembly being taken back to the factory where it is repaired by highly trained fitters and then put back into the Scheme.

J. Bouyer next presented his paper (8) 'The Bouyer Tractor: The Light Low-powered Tractor for Agricultural Work in Hot Countries'. The Bouyer factory at Tomblaine, France, employs about 450 people and produces 25,000 units/annum, at present, mostly single axle tractor for small farms in the hot tropics. When it became clear from the Company's trials that a somewhat larger four wheeled tractor which carried its operator was needed, co-operation was set up for this development work between the French Company for the Development for Textiles (CFDT), the Centre for Experimentation in Tropical Farm Machinery (CEEMAT) and the Bouyer Company. The tractor was to be manufactured partly in France

(the more sophisticated components) and partly in the user country. The design concept included fitting any convenient engine from 12.5 to 25 kW output, using standard type transmission and front axle assemblies and making provision for a front mounted transport tray, drawbar or a simple hydraulic lift package and supplying power off points for rotary tillers and irrigation pumps. A further important proviso was that it should be possible to adapt to the tractor any type of implement that farmers already possessed.

Prototypes were tested in the Ivory Coast, Mali, and Senegal. A larger batch of 70 machines was then put out in 1977 for supervised field testing in seven West and Central African countries. Reports of this experience discussed in October 1977 encouraged the developers to put a further 200 tractors into the field in 1978. Detailed attention is now being given to the economics of the exercise, perhaps rather late in the development process, although users were said to be happy with the tractor. The importance of operator training and technical backing with spares and service facilities was emphasised.

Here is another case, similar to the Tinkabi, in terms of approach, clearly destined to be successful in its own sphere. The total numbers are still in hundreds, however, way below the projected demand of about 180,000 in 1980 mentioned by Cattermole (2).

Noboru Kawamura's (9) 'The Japanese Small Tractor' was read by Peter Cowell (NCAE). The success of the Japanese single axle tractor is well known, and not surprising in an agriculture consisting of farms typically 0.5-1 hectare in size, over an arable area of 5.615 million hectares, 57 percent in paddy fields of 0.1 ha.

Over the last ten years Japanese production of two wheel

(single axle) tractors has declined from 478,000 to 296,000 while the output of small four wheeled tractors has increased from 24,000 to 236,000. Seventy-two percent of these four-wheel machines are of 15 kW or less, clearly in the "small tractor" category. But these are highly sophisticated machines, designed primarily to power rotary tillers. Four-wheel drive, three and four-speed power take-off shafts, multi-cylinder high speed engines, complex hydraulic systems are all features of the Japanese machines. Within the constraints of low technology, low yields and low prices, it is difficult to foresee a demand for the small Japanese four wheeled tractor in LDCs. Regardless of this the paper gave a fascinating account of the characteristics of the tractors and the agricultural system of which are part.

The final paper (10) of the conference "The AMEX Tractor" was presented by V. J. Dane-Bryan. AMEX is an overseas consultancy firm based at Shaftesbury in England. The author became associated with AMEX in 1975 to develop a small tractor to fill the gap between a good ox team and production tractors of about 26 kW. The main design parameters were :

1. enough power to plough 1 furrow in any conditions
2. simple design and construction with large safety factors
3. 'low' cost—U.S. \$ 3,000 was quoted
4. economic operation
5. high design stability to give safe operation.

Traction criteria produced design values for mass, draught and tyre size very similar to those arrived at by Crossley (3). Design detail was aimed at production or assembly in LDCs.

At first sight the AMEX tractor looks a bit like a dumper truck except that a transversely mounted 12 or 13 kW engine and

belt drive transmission takes the place of the hopper, and of course the small wheeled steering axle is the front of the tractor rather than the back of the dumper truck. Mechanical in-board disc brakes and a simple hydraulic lift system are incorporated with auxiliary power drive taken off the engine crankshaft. The tractor is very compact, having a wheelbase of only 1.17 m and an outside wheel width of 1.0 m. This may well make it an uncomfortable machine in rough ground conditions.

The author claimed that the AMEX gave a high tractive efficiency when ballasted (quite heavily for its size) at the rear. Construction is certainly simple, and the tractor appeared to have potential for operation on small level farms. No production figures, official or tropical test data were available.

The second session described in some detail the development methods which have led to modest success for the Tinkabi and Bouyer tractors. Others could clearly be built on the same lines, but it has taken us a long time even to arrive at this stage in 'Small Tractor' development. What answers could the final discussion provide towards overcoming the problems we still face.

Session 3. Discussion Forum on How Present Problems May Be Overcome

The discussion was opened by R. D. Bell, Head of the Overseas Department at the NIAE. He highlighted some of the comments which had been made in the papers, and brought up additional factors for delegates to consider :

1. only a small number of farms would appear to be suited to the 10-15 kW "Small Tractor" concept (Pollard & Morris)

2. servicing problems are greater at low operational densities, perhaps tractor servicing should be coupled to other mechanical operations
3. many small tractors have lacked effective linkages and implements. There was no prospect of success without these
4. it is more severe to use small tractors at full load than big tractors at part load
5. should small tractors be fitted to agricultural systems, or used as catalysts for development like the Tinkabi?
6. perhaps we should use small tractors with large ones to cover the marketing profit motive.

Following this introduction, the chairman suggested that the key to increasing small farm outputs lay in improving the living conditions of small scale farmers. He then asked delegates to concentrate on answering the central question posed by the conference, "Are Small Tractors Appropriate?"

Discussion went on long past the time allotted. Many useful contributions arose from the floor. Among them was a comment on the relationship between crop yield and value and the cost of a tractor. It was stated that the quantities of paddy required to fund a small tractor in a range of countries were :

Country	Tonnes paddy	Land area (ha)
Japan	3.3	0.7
Sudan	6	
Nigeria	12	
Malaysia	15	
Philippines	18	
India	33	11

No further comment is needed.

Brian Potthecary (Agricultural Engineering Consultant) and C. Uzureau (Director, CEEMAT) considered that the Tinkabi and Bouyer tractors had succeeded in unique environments, implying perhaps that other regions were not so fortunate in possessing the

right ingredients for success. Ian Johnson of the Overseas Department, NIAE suggested that successful marketing of single axle tractors in Kenya and the Philippines had been associated with non-agricultural companies.

The Chairman emphasised a delegate's comment that there was still no shortage in many countries of land waiting to be brought into production by suggesting that there was a total area of 225×10^9 hectares in this category. So in addition to increasing production from existing farms a great deal remained to be done in clearing and developing new land. The main limiting factor is still a shortage of energy as Crossley (3) pointed out, developed countries having an input of 0.6 kW/ha compared with much of Africa at 0.04 kW/ha. That energy, of course, could be provided by much larger power units if the overall agricultural organization permitted.

In answer to the central question Boshoff (IITA, Ibadan) struck a blow for the larger unit. He suggested that the developer of a small tractor found two critical questions difficult to answer -

1. What is the size of your market?
2. What is the intensity of

use of your product?

In addition the price of the crop and the skill of the farmer were vital factors in the success of small tractors. After many years of involvement in development Boshoff had concluded that as crop prices, farmer skills tractor use intensity all increased, the larger tractor was progressively encouraged.

Overall, however, there was a strong consensus that answers could be found to the engineering problems, but that correct analysis of the many other critical factors of sociology, economics, agronomy, production systems and the like was much difficult yet vital to success.

Each country or region would need its own unique solution to the overall problem of increasing production in the most economical way. This would take time, and would only be achieved by the painstaking multi-disciplinary approach.

CONFERENCE PAPERS

1. Pollard, S. Morris, J. Economic Aspects of the Introduction of Small Tractors in Developing Countries. A Philosophy for Small Tractor Development.
2. Cattermole, C.G. Economic, Political and Social Aspects

Governing the Success of Small Tractors

3. Crossley, C.P. Theoretical Design of Small Tractors
4. Murillo-Soto, F. Aguirre-Gandara, M. Large versus Small Tractors from an Economic Standpoint in Mexico
5. Barton, P.S. Changes in the Demand and Design of Small Tractors During the period 1960 to the Present Date
6. Gego, A. Aspects of Size and Concept of Tractors for Tropical Agriculture
7. Catterick, A. The Tinkabi System
8. Bouyer, J. The Bouyer Tractor : the Light Low-powered Tractor for Agricultural Work in Hot Countries
9. Kawamura, N. The Japanese Small Tractor
10. Dane-Bryan, V.J. The AMEX Tractor
11. Inns, F.M. Operational Aspects of Tractor Use in Developing Countries. A Case for the Small Tractor.

PUBLICATION OF THE CONFERENCE PAPERS

A full report of this conference will be published in the June issue of the "Agricultural Engineer", the journal of the Institution of Agricultural Engineers, West End Road, Silsoe, Bedford, England. MK45 4DU. ■■

Co-operating Editors



A. H. Abdoun Bilash Kanti Bala M.A.K. Bedri W.J. Chancellor Md.S.Choudhury Chang Joo Chung
Abdien Hassan Abdoun Md. Shahansha-ud-Din Choudhury P.O. HAA, Bhutan

Director, General Administration for Engineering, Ministry of Agric., F & NR., Khartoum, Sudan

Professor, Farm Power & Machinery Department Bangladesh Agricultural University Mymensingh, Bangladesh (on leave to Iraq: 4/74, Sherej Khana Mosul, Iraq)

George B. Hanna
 Engineer, Farm Mechanization Consultant, 160, 26 July St., Agouza, Guiza, Egypt

Bilash Kanti Bala
 Head, Dept. of Farm Power & Machinery, Bangladesh Agricultural University Mymensingh, Bangladesh

Chang Joo Chung
 Associate Professor and Acting Head, Department of Agricultural Engineering, College of Agriculture, Seoul National University, Suweon, Korea

Mohammad Ilyas
 Agricultural Engineer, International Rice Research Institute (Pakistan), P.O. Box 1237, Islamabad, Pakistan

Mohamed A. Bedri
 General Manager Democratic Republic of The Sudan Ministry of Industry Project for Manufacture & Assembly of Trucks & Tractors P.O. Box 1855 Khartoum, Sudan

Merle L. Esmay
 Professor, Agricultural Engineering, Michigan State University, East Lansing, Michigan 48823, U.S.A.

Chau Van Khe
 Chairman, Agricultural Engineering Div. National Agr. Center in Saigon, Ministry of Education Republic of Vietnam, 45 Chungde Saigon, Vietnam

William J. Chancellor
 Professor, Agricultural Engineering, University of California, Davis, California 95616, U.S.A.

Manbahadur Gurung
 Horticulture Extension Officer Ministry of Development Dept. of Agriculture, HA Bhutan

John Kilgour
 Lecturer in Engineering Drawing and Design, National College of Agricultural Engineering, Silsoe, Bedford. MK45 4DT, England



M.L. Esmay M. Gurung George B. Hanna Mohammad Ilyas John Kilgour C.C. Lee



A.M. Michael Adrian Moens A.A. Mughal T.T. Pedersen G. Pellizzi Tien-song Peng



Jun Sakai B.K. Shrestha Siswadi Soepardjo R.P. Venturina

Chul Choo Lee

Project Engineer, Projects Department, Asian Development Bank P.O. Box 789, Manila, Philippines

A.M. Michael

Professor, Water Technology Center, Indian Agr. Research Institute, New Delhi 110012, India

Adrian Moens

Head Professor, Dept. of Agr. Engineering, Agricultural University, Dr S.L. Mansholtlaan 12, Wageningen, Netherlands

A.A. Mughal

Assistant Professor, Agricultural Engineering in the Faculty of Agricultural Engineering, Sind Agriculture College, Tandojam, Sind, Pakistan

T. Tougaard Pedersen

Professor, Agricultural Engineering at the Royal Veterinary—and Agricultural University, Copenhagen, Denmark.

Giuseppe Pellizzi

Professor, Universita Degli Studi, Facolta Di Agraria, Istituto Di Meccanica Agraria, Via G Celoria 2-20133 Milano Italy

Tien-song Peng

Specialist, Plant Industry Division Joint Commission on Rural Reconstruction 37, Nanhai Road, Taipei, Taiwan

Jun Sakai

Associate Professor, Department of Agricultural Machinery, Faculty of Agriculture, Mie University, Kamihama-cho, Tsu City, 514 Japan

Bala Krishna Shrestha

Assistant Agr. Engineer, 4/141, Pulchowk Behind the Fire Brigade Latipur, Nepal

Siswadhi Soepardjo

Chairman, Agricultural Engineering Dept., Bogor Agricultural University, Japan Gunung Gede, Bogor, Indonesia

Ricard P. Venturina

Assistant Scientist for Agricultural Research, National Science Development Board, P.O. Box 3596, Rizal, Manila, Philippines

New Co-Operating Editors



Bherulal T. Devarajani

Date of Birth : January 3, 1947

Nationality : Pakistan

Academic Qualifications :

Matric : 1962, First Division.

B. Sc. (gric.) Honours In Agricultural Engineering : 1967, First Division.

M. Sc. Agricultural Engineering : 1970, First Division.

M. Sc. Agricultural Economics :

1975, Qualified.

(Thesis to be submitted in April 1978).

LL. B. : 1975, Second Division.

Short Training in Precision Land Levelling.

Appointments :

Lecturer : 1967-1974.

Assistant Agricultural Engineer : 1974.

Senior Agricultural Research Engineer : 1974 Onwards.

Full time Principal Investigator : 1976 Onwards.

Teaching Duties :

Engineering Drawing & Design.

Workshop Technology.

Farm Power & Machinery.

Surveying.

Soil Mechanics.

Soil Conservation.

Hydrology.

Post-graduate Research Guide :

1974 Onwards

(15 Theses produced).

Personal Research :

“Role of Agricultural Machinery in Better Use of Irrigation Water”. M. Sc Agricultural Engineering Research.

“Economics of Mechanization Under Diversified Farming.” M. Sc. Agricultural Economics Research.

} 1971
-1974

} 1967
-1970



Amala Prasad Sharma

Date of Birth : 15th June, 1942

Nationality : Fiji

Qualification :

B. Sc. Agricultural Engineering (1966) U. P. Agricultural University, Pantnagar, India.

Present Position :
Agricultural Engineer, Koronivia Research Station, Ministry of Agriculture and Fisheries, Fiji.

Professional Experiences :
Assistant Professor Agricultural Engineering at G. V. College of Agriculture (Rajasthan University) Sangaria, till Dec., '76 after graduation.

Lecturer Agricultural Engineering, College of Agricultural Engineering, Punjab Agricultural University, Ludhiana. w. e. f. Jan, '67 to July, '67 and transferred as such to the post of.

Lecturer Agricultural Engineering, Haryana Agricultural University, Hissar. w. e. f. July, '67 to March, '71 and then promoted as.

District Extension Specialist, Agricultural Engineering with Farm Advisory service of the same University.

Deputed as Agricultural Engineer (Indian Expert) Under the Colombo Plan of Indian Aid to the Govt. of Fiji to conduct Research in farm Machinery/Mechanization and to advise on Farm Mechanization. w. e. f. June, '76.



Arumugam Kandiah

Date of Birth : May 1, 1944

Nationality : Sri Lankan

Major Area of Specialization :
Agricultural Engineering

Specialized Field :
Irrigation and Water Manage-

ment/Soil Conservation Engineering

Present Position :
Head, Department of Agricultural Engineering Faculty of Agriculture and Chairman, Board of Study in Agricultural Engineering, Postgraduate Institute of Agriculture

University of Sri Lanka, Peradeniya, Sri Lanka.

Academic Training :
B. Sc. Agric. Honours : University of Ceylon, 1963-1967.

M. Sc. Irrigation : University of California, Davis, USA. 1971-1972.

Ph. D. Engineering : University of California, Davis, USA. 1972-1974.

Ph. D. Thesis : Fundamental Aspects of Surface Erosion of Cohesive Soils.

Past Employment Record :
1967-1968 : Graduate Trainee, River Valleys Development Board, Sri Lanka.

1968-1970 : Research Officer, Department of Agriculture, Sri Lanka.

1970-1975 : Assistant Lecturer in Agricultural Engineering.



Gajendra Singh

Date of Birth : 3rd August, 1944

Nationality : India

Qualification :

1966 : B. Sc. A. E., G. B. Pant Univ. of Agri. & Tech., Pantnagar, India.

1968 : M. S., Rutgers University, New Brunswick, N. J., USA.

1973 : Ph.D., University of California, Davis, California, USA.

Professional Experience :
1966 : Assistant Engineer, Land Development Scheme, GBPUA & T., Pantnagar, India.

1967-1968 : Research Assistant, Rutgers University, New Brunswick, New Jersey, USA.

1968-1973 : Research Assistant, University of California, Davis, California, USA.

1973 : Research Engineer, Cotton Mechanization, Haryana

Agricultural University, Hissar, India.

1973-1975 : Associate Professor of Agricultural Engineering G. B. Pant University of Agriculture & Technology, Pantnagar, India.

1975-1978 : Assistant Professor of Agricultural Engineering Asian Institute of Technology, Bangkok, Thailand.

1978 till date : Associate Professor of Agricultural Engineering, Asian Institute of Technology, Bangkok, Thailand.

NEW PRODUCTS

Planter



New John Deere 7000 Conservation Planter extends the benefits of Max-Emerge Planters to minimum-tilled or zero-tilled fields.

Innovations on the new 7000 Conservation Planter — in 4-, 6-, and 8-row models — overcome the poor stand problems that were associated with early model planters intended for use in stalk or sod ground.

Penetration problems have been overcome by using a heavyweight 7 × 7-inch main-frame and by providing adjustable downpressure springs that transfer up to 500 pounds onto each coulter and planting unit, depending on ballast.

Accurate seed placement at the desired depth has been accomplished by attaching a heavy-duty tillage coulter (fluted or ripple) ahead of, and to, each planting unit so its working depth is determined by the same gauge wheels that control planting depth of the Tru-Vee™ openers.

Optional heavy-duty cast iron firming wheels provide the strength and weight needed to close furrows in hard ground conditions and sod.

Electronic seed monitors are available to help ensure planting at the desired population level.

New John Deere 7000 Max-Emerge Conservation Planters will be available to plant four 30- to 40-inch rows, six narrow or wide rows, or eight narrow rows.

(Deere & Company : John

Deere Road, Moline, Illinois 61265, USA)

Toolbar



Increasing tractor horsepower has created a need for stronger toolbars equipped with stronger hitches. John Deere has met both requirements with the introduction of the new 50 Toolbar for use on tractors with up to 250 PTO hp, equipped with Category 2 or 3 hitch with Quik-Coupler.

Ground-engaging tools — subsoilers, chisels or a variety of other toolbar-based equipment for 5 × 7-inch toolbars — can be set for almost any spacing on the 50 Toolbar because of a laterally adjustable mast that virtually eliminates “dead spots”.

The 50 Toolbar is available in 8- to 30½-foot lengths.

For applications not requiring the strength of the new 50 Toolbar, the John Deere 45K Toolbar stays in the line for use on tractors delivering up to 150 PTO hp.

(Deere & Company : John Deere Road, Moline, Illinois 61265, USA)

Heavy Duty Washer

With 750 PSI at 3 GPM, the HPW-3HD is the heavy duty washer for all your cleaning needs.

This heavy duty washer is powered by a 115 volt, 15 amp, 1 h. p. motor and 3 piston pump.

An automatic siphoning system and unloader valve add years of life to the pump and motor. With



the automatic siphoning system, cleaning concentrates are mixed with the water after the pump. Only clear water goes through the pump. The unloader valve reduces pump back pressure and motor load when the washer is turned on, but not spraying.

Hand gun features include 3/8" hose, trigger-type control and a four nozzle turret head.


The turret head consists of three stainless steel high pressure cleaning nozzles and one stainless steel low pressure concentrate nozzle. To select the spray pattern needed, rotate the head : 0° to blast away heavy dirt, 15° for average cleaning and 40° for large areas. To apply cleaning concentrate at low pressure, rotate the head to the largest opening. The washer automatically switches to low pressure and applies the cleaning concentrate.

A three way valve on the front of the washer enables you to apply clear water or cleaning solutions (from a 55 gallon drum or similar container) at 100 or 750 PSI.

Ten inch wheels and 30 foot hand gun hose let you take HPW-3HD anywhere your cleaning jobs may be.

(Gordon Fennell Company : Cedar Rapids, Iowa 52401, USA)

Self-Propelled Hydraulic Ladder

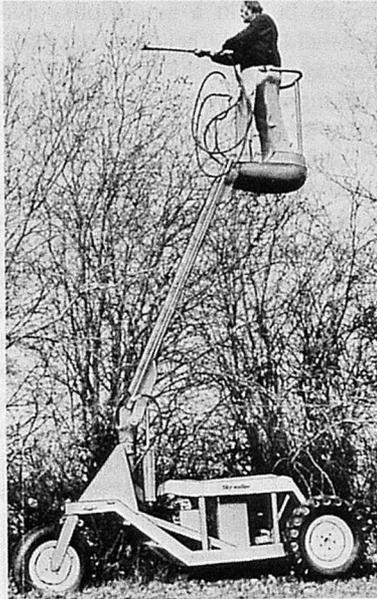

Sky walker W-18 ... A hydraulic and hand operated ladder for pruning of trees, with the electric start 16HP Briggs & Stratton engine.

This ladder is suitable for operation by a man standing on it for pruning of trees, because its position can be controlled by hydraulic system. And with three-wheel style tires for making a small sharp turn, you can easily move it in any small places.

(Specifications)

Hydraulic pump : 12 G. P. M. at 2500 R. P. M., Pressure : 1500 P. S. I., Drive : Hydraulic motor through differential, two speeds 0-2 M. P. H., 0-4 M. P. H., Boom lift capacity : 400 lbs (181 kg), Swing : 39 degrees, Working height : 19'-0" (5.79 m), Basket height : 13'-0" (3.96 m), Basket down : 5'-5" (1.65 m), Width overall : 5'-11" (1.80 m), Turning radius : 7'-1" (2.16 m), Weight : 1850 lbs (840 kg) (approx.)

(Koor Inter-Trade (Asia) Ltd. : Koor Bldg. 8, Shaul Hamelech Ave., P. O. Box 1514, Tel-Aviv, Israel)

Moisture Tester



Accuracy of any tester for measuring moisture is based on measurements taken in an air oven. The calibration of the INSTO MOISTURE TESTER is based on air-oven measurements. This tester will read from 10% to 40% moisture content with optimum calibration on readings from 10% to 25% moisture content.

The INSTO MOISTURE TESTER uses a standard nine volt transistor radio battery. To replace the battery, simply open the battery cover and remove the battery with thumb and index finger. Then detach the battery from the leads and replace with a new battery. With normal use the battery should easily last for one year. If a sample is left in the testing chamber, the power is shut off automatically in approximately two minutes. It is recommended that the battery be removed when the MOISTURE TESTER is not to be used for several months. Battery is not covered by warranty.

The INSTO MOISTURE TESTER measures 7" x 9 5/8" x 4 3/4" and weighs less than 60 ounces. The electronic circuitry is completely enclosed in a molded plastic case. With normal care and use the rugged INSTO MOISTURE TESTER will last many years.

(Insto Inc. : P. O. Box 113, Auburn, Illinois 62615, USA)

Area Monitor



The DICKEY-john Area Monitor is a solid state, simple to operate, electronic measuring device that provides you with a direct digital readout of the numbers of acre/hectares being plowed, cultivated, planted, fertilized, or harvested. The Area Monitor can be used with sprayers, spreaders, self propelled equipment, or any implement towed by tractor.

As a farmer and business manager, before you can work your land efficiently, you need to know precisely how much land you are working. The only acreage that counts is the acreage you can harvest.

The Area Monitor is a fundamental management tool. The knowledge it provides can pay off in the form of direct savings at the time of seed and chemical purchases and direct income at the time of harvest.

Your exact acre knowledge will allow you to plan your time more effectively for greater profits.

(DICKEY-john Corporation : P. O. Box 10, Auburn, Illinois 62615, USA)

Introduction to Crop Processing Machinery

(Guyana)

In teaching the farm mechanization aspects of agriculture over a number of years in tropical and developing countries, the author has felt a great need for books written in simple terms so that the subject matter can be "introduced" to students who have grown up in a rural background and are not very familiar with modern machinery and equipment, while most of the existing and sometimes excellent books written to deal with agricultural machinery are authored by experts located in western countries where farm mechanization has become well established and where the present generation of students have grown up in a more "mechanical" background. The author has tried to cover the gap in the field of crop processing by writing a book entitled "Introduction to Crop Processing Machinery", which is being presented in a summary form in this article. Enquiries for publication of the entire work would be welcome from interested publishers.

The primary objective of the book is to introduce to the student the basic principles of the various types of machinery and equipment used for crop harvesting and processing, without attempting to deal either with the details of construction of an individual machine or to make the book appear either as an operator's manual or a maintenance mechanic's guide. Detailed information on these aspects of a particular model or machine is best obtained from the well illustrated instruction books usually supplied by the makers of machinery. A list of selected references has been provided at the end of each

chapter which can help the student seeking detailed information on any particular type of machine of operation.

Crop processing covers the various operations that are carried out on the farm from harvesting to the time the crop is consumed or finally disposed of by the farmer. It includes, for example, the operations of harvesting, threshing, cleaning, grading, cutting, mixing and drying, in addition to crop handling and storage. Preservation of crops by methods of canning, freezing, and dehydration are also considered to be a part of crop processing. Of these, harvesting is the last operation usually carried out in the field, while all other operations are carried out in the farmstead or barn. A brief summary of the various operations mentioned above and the machinery used for the processing of commonly grown field crops in tropical countries, as discussed in the text of the book, is provided in the following paragraphs along with selected illustrations.

Harvesting and Threshing

The harvesting equipment used by a farmer may vary from a simple sickle and the scythe to a complex self-propelled combine harvester-thresher, depending mainly on the scale of operation and the type of crop. The harvesting equipment considered in the book includes the sickle, the scythe, the animal-drawn land-wheel driven or a tractor operated power-driven reciprocating mower, the power driven rotary slasher, the reaper and the binder, the power driven flail-type forage harvester for green grass or dry hay, a root harvester for crops like potatoes, cassava and sweet potatoes which form their edible parts under the soil, the modern combine-harvester which can perform the multiple opera-

tions of harvesting, threshing, cleaning and bagging or delivering in bulk in a single pass over the field, and the corn or maize harvester, which is capable of picking either a single or multiple rows at a time.

The threshing of a crop as done either by peasant farmers with little mechanical help or by power operated threshers, along with recent developments in animal drawn threshers like the 'Olpad' equipment is also considered. The specialized equipment required for the hulling or shelling of a grain like rice or maize (Fig.1) after threshing or that of parchment coffee is discussed in this chapter.

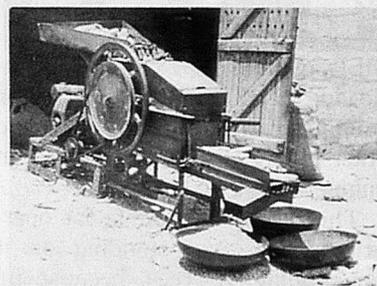


Fig.1 A hand operated maize sheller-grader converted to a power driven unit

Cleaning and Grading

Modern mechanical threshers also clean and grade the grain to varying degrees during threshing, while threshing as carried out by the peasant farmer (Fig.2) using simple or no equipment (by beating the crops on the ground) does

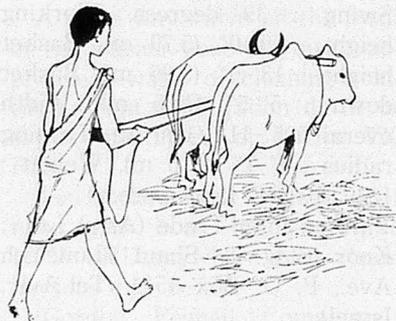


Fig.2 Threshing of a crop by animal trampling on ground

not provide for any cleaning or grading during threshing of the crop. In this chapter, the advantages of cleaning and/or grading the crop are discussed, along with the cleaning processes used. Some of the machinery used on the farm clean and grade the grain or seed simultaneously, while others either only clean or grade. The equipment considered in the book for these purposes include a winnower (Fig.3), a sieve cleaner, a pneumatic separator or aspirator, an indented cylinder, a gravity separator, a belt separator, a string grain sorter, a specific gravity separator, a sack cleaner and a roller grader. The operating principles of the various types of cleaners and graders are also discussed, along with equipment for chemical dressing or dusting the seed, which is usually carried out as a combined operation.



Fig.3 A prototype bicycle operated winnowing machine under test

Cutting and Chopping

Beef and dairy cattle and other types of livestock like sheep, goat or pigs eat vegetative matter like grass, hay, maize or other crops grown for forage and convert them into food or fiber in such a way that they are suitable for human consumption or use, for example meat, milk and wool. The feed provided to the cattle is best converted into human food if it is cut or chopped into a suitable size, instead of feeding it in bulk. Equipment that can so prepare the crop directly in the

field are called forage harvesters, as discussed in an earlier chapter; the second type of equipment, called a silage cutter (Fig.4) or a silo filler are discussed in this chapter. These include the hand chopper and the hand or power operated silage cutter, the latter using either a cylinder type or a flywheel type cutting head. A recently developed crop shredder is also considered for preparing the forage crop.

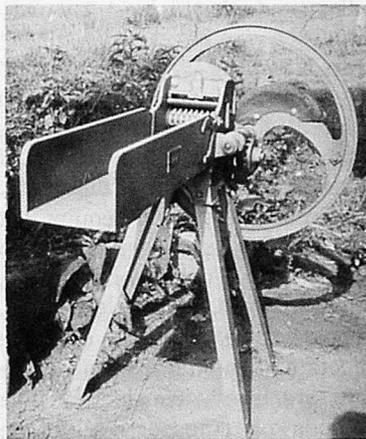


Fig.4 A hand operated silage cutter showing feeding trough and toothed rollers

Grinding and Crushing

In processing a crop for consumption as either human food or animal feed, it is generally necessary to reduce their size; this may be done by either grinding or crushing. The ground material is also usually graded by sieving, as different sizes of material are used for feeding various farm animals. As the power required to grind increases with the fineness of the final product,

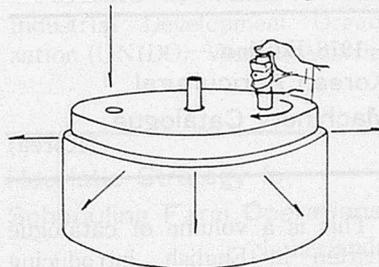


Fig.5 A hand operated grinding stone

grinding is carried out only to the extent necessary. The equipment used are a buhr-stone mill (Fig.5) or a plate mill, a roller crushing mill, a jaw crusher, a hammer mill, a cake breaker or a combination mill using more than one of the basic devices in the same equipment. Factors affecting the choice of a mill and a hay crushing equipment are also considered.

Mixing of Feed and Food

In preparing a balanced ration for animal feed, a number of highly concentrated food is used along with the bulk material. The three main types of mixer used on a farm are batch, semicontinuous and continuous, depending upon the quality and quantity of mixing required. The equipment considered herein are the vertical dry-feed mixer, the revolving drum mixer, the elevator-type mixer and the horizontal wet-feed mixer.

Crop Drying

Agricultural products like grain or grass usually contain at harvest time a high level of moisture which is not safe for prolonged storage. The level of moisture is therefore reduced as soon as possible, consistent with the characteristics of the crop. A detailed consideration is made in this chapter of the important factors affecting drying, e.g. temperature, drying rate and the movement of moisture in a drying grain. The types of grain driers used are continuous-flow, platform type for bagged grain (Fig.6) and a ventilated silo. The

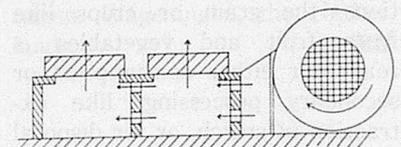


Fig.6 A platform drier for bagged grain with electrically operated heaters and fan

NEW PUBLICATIONS

types of grass driers used are either low or high temperature units. Ventilation of dried material during storage is also considered important, and the relative merits of an axial flow and a centrifugal fan are discussed, along with the factors affecting the choice of a fan for drying a crop and the grain/grass drier for a given farm.

Crop Preservation

As plants or their fruits and seeds continue their life processes after removal from the soil or separation from the plant in which they grew, it is necessary to preserve or process the crop for later use by storage. The airflow methods used to help the material breathe during storage are natural ventilation, forced air and forced air with auxiliary heat. In processing a crop for preservation the retention of its original qualities like color, flavour, texture and nutritive value are important. The three important processing methods considered are canning, freezing and dehydration. The change in the moisture content of a crop during drying and a dehydration is discussed. The drying systems considered are single-stage, multi-stage and tunnel type driers. The inter-relationship between crop variety and dehydration and the physical factors affecting drying rate and quality are considered, along with a typical flow sheet for dehydration.

Grain Storage

After the completion of various post-harvest processing operations, the grain or crops like fresh fruit and vegetables is ready for either consumption or secondary processing, like extraction of starch, or for disposal by sale. Storage of the grain is necessary if they are required for consumption on the farm,

over a long period of time stretching up to the next harvest, or for realization of a better financial return by sale at a later date. Unless storage is carefully planned and carried out, considerable losses can occur, amounting to 25 % or more of the total crop. The various technical considerations in grain storage are discussed in this chapter, along with methods of storage, e.g. in bags, meal bins, storage bins, ventilated silo, loose bulk or outside stack.

Crop Handling

A large variety of material in different shapes, sizes, and states are handled during processing of crops and grains on the farm. The machinery and equipment used for this purpose includes, to name a few, conveyors, trucks, shutes, pumps, channeles, belts, scrapers, spirals, buckets ect. The objects of handling a crop on the farm are briefly considered. The methods of transport used are hand and headload, auger conveyor, belt conveyor, chain conveyor, elevator, front end loader, pumps and pneumatic blower. Their relative merits and uses are discussed in this chapter.

By **Biswa N. Ghosh**, UNESCO Expert in Agricultural Engineering, Guyana School of Agriculture, Mon Repos, E. C. D., Guyana, South America. (formerly Senior Lecturer in Agricultural Engineering, The University of East Africa, Kampala, Uganda).

—1978 Edition —
Korean Agricultural Machinery Catalogue (Korea)

This is a volume of catalogue written in English, introducing the main products of 19 main

manufacturers of agricultural machinery in Korea.

The contents enclose the color photos and main specifications of the products, and the address and telephone number of the head office and the Seoul office of the manufacturers.

Page : 30 pages. Soft covered, color-printed.

Size : 18.5 × 25.5 cm

Published by Korean Farm Machinery & Tool Industry Cooperative. (19-6, Do-Dong, Young-San Gu, Seoul, Korea).

Research Summary

January 1975-August 1977

(Thailand)

An outstanding feature of all developing countries is the large number of people engaged in agriculture. As a consequence, overwhelming of developmental problems in these countries have an agricultural bias. In some countries within the region served by Asian Institute of Technology (AIT), the proportion may be as high as 90% of the work force.

This publication is edited by AIT which has been contributing to promotion of the agricultural engineering education in Asia, with the intention of introducing its research summary widely to the persons concerned of both inside and outside of the country.

The contents are the summaries of research papers especially on the subject which they have already accomplished or are actually studying on and after January 1975, within the field of study in "Agricultural Systems Engineering and Management" and "Agricultural, Soil & Water Engineering" which are under administration of the Division of Agricultural and Food Engineer-

ing of AIT.

If you wish to get a copy of this Summary, please take contact with AIT directly and individually, and you could receive it without any charge.

Size : 18.5 × 26.5, Page : 22 pages

Published by : Asian Institute of Technology (P. O. Box 2754, Bangkok, Thailand)

Engineering for Appropriate Technology
Farming Systems in the Lowland Humid Tropics
 (Nigeria)

This is a report for 1977 of the Agricultural Engineering Sub-Program of Crop Engineering Department of International Institute of Tropical Agriculture (P.M.B. 5320, Ibadan, Nigeria).

The contents of this report consist of 11 project as follows :

- Project 1. Agrochemical applicators for small and intermediate farmer use with 'no-till' or 'minimum-tillage' mulch farming systems.
- Project 2. Planters for use with 'no-till' or 'minimum-tillage' mulch farming systems.
- Project 3. Development of a rolling injection planter planting through mulch.
- Project 4. Development of a fertilizer applicator for use with mulch farming systems.
- Project 5. Investigations in alternative low-energy rice establishment practises on hydromorphic (phreatic) soils.
- Project 6. Investigations into simple methods/tools for harvesting maize.
- Project 7. Development of a stripper-harvester for rice.
- Project 8. Development trials of the Ransomes root crop harvester for cassava har-

vesting.

Project 9. Design and Development of the 'African Chief' 5 H.P. tractor.

Project 10. Evaluation trials of tractors proposed for introduction into West Africa.

Project 11. Rural Technology-Non-Ferrous casting techniques.

Development and Transfer of Technology Series No. 3
The Manufacture of Low-cost Vehicles in Developing Countries
 (Austria)

This study is based on the data available and the findings of the Expert Group Meeting. Its main purpose is to assist in promoting the manufacture and use of low-cost vehicles in developing countries. It is designed to assist government officials responsible for formulating policies on modes of transportation in their countries and businessmen concerned with the manufacture of various types of transport vehicles. It describes the main types of low-cost vehicles, what is involved in launching their manufacture, and aspects of marketing them. It reviews recent developments in several Asian countries, with particular emphasis on India and the Philippines, where low-cost vehicles have significantly penetrated the market.

Published by United Nations Industrial Development Organization (UNIDO), Vienna, Austria.

Heuristic Strategy for Scheduling Farm Operations
 (Netherlands)

Producing products on a farm needs planning. The farmer decides what to produce and how to produce it. The answers to these questions can not be given independently. To assist his decision-making a number of techniques are employed.

The aim of this study was to develop a model which :

- takes account of hourly weather data and material properties in their recorded sequence,
- uses men and machines according to their availability in regular time and overtime and according to the readiness and availability of the materials to be processed,
- takes decisions (selecting operations and length of operations) at each decision date according to an explicit strategy.

The solution of the scheduling problem contributes to the machinery selection problem by using the model for different sets of men and machines.

The book is divided into two main parts as follows :

- Scheduling operations : a heuristic strategy (Terms and sub-systems, Literature, Decision values, specifications and extensions of the urgencies, Decision dates and state transformation, Simplified scheduling problems)
 - Grain harvest : a case study (Weather, properties of materials and weather forecast, Materials, Men, equipment and operations, Simulation program, Experiments, Discussion)
- Published by Centre for Agricultural publishing and Documentation, Wageningen, the Netherlands. ■■

BACK ISSUES

(Vol. 9 No. 1 ~ 3, 1978)

AGRICULTURAL MECHANIZATION IN ASIA (Vol. 9 no. 1, Winter, 1978)	
Preface (Yoshisuke Kishida).....	9
Solar Energy Utilization in a Greenhouse Solar Drying System (H. S. Chang).....	11
Solar Energy Power Light Crop Sprayer (Ray Wijewardene).....	17
A Supplement Solar Heater for Egg Production (M. L. Esmay, F. W. Hall, C. J. Flegal, C. C. Sheppard, H. C. Zindel).....	19
Solar Energy and Its Application (A. A. Marinul Hossain).....	23
Appropriate Technology for Rural Development (Amir U. Khan).....	25
New Concepts in the Optimization of Irrigation Mechanization (Zahid Mahmud).....	29
Mechanized Tillage—Better Use of Irrigation Water (Bherulal T. Devrajani).....	33
Testing MF—400 Combine Harvester under Conditions of the Sudan (A. H. Abdoun, I. A. Mohammed).....	39
Some of the Engineering Aspects of a Simple Low Cost Rice Bran Stabilizer (P. S. Barton).....	43
Storability and Palatability of the Propionic Acid Treated Rice (Hisamitsu Takai).....	51
Focus on Agriculture in India (B. K. S. Jain).....	58
The Present Status and Research on Farm Mechanization of Sandy Land Agriculture in Japan (Akira Ishihara).....	63
Tillage and Practices for Arid Lands of Rajasthan (India) — A Perspective (R. C. Yadav, R. P. Singh).....	71
Machinery & Equipment for Intensive Fish — Breeding (W. S. Weil).....	77
News.....	88
New Products.....	92
New Publications.....	95

AGRICULTURAL MECHANIZATION IN ASIA (Vol. 9 no. 2, Spring, 1978)	
Preface (Yoshisuke Kishida).....	9
The Economics of Small Farm Mechanization in Asia (Bart Duff).....	11
Plant Protection Equipment for Small and Marginal Farmers (Sharad L. Patel).....	24
Prospects of Farm Mechanization on Small Holdings in U.A.R. (George Bassily Hanna).....	31
Mechanized v/s Bullock Cultivation — Consumptive Water Use (Bherulal T. Devrajani).....	35
Status of the Rice Milling Sector (Robert S. Sakate).....	40
Impact of Tractorization on Production Pattern, Cropping Intensity and Farm Income in India (A. C. Sharma).....	49
Solar Pond and Storage of Solar Energy (Md. Dault Hussain).....	53
The Development of the IRRI Portable Thresher — A Product of Rational Planning (Jose S. Policarpio, John A. McMennamy).....	59
Resistance of Paddy to Air Flow (Bilash Kanti Bala, A. T. M. Ziauddin, Md Mosharaf Hossain).....	66
Report from Overseas Shows (F. M. I. R).....	69
News.....	77
New Publications.....	84

AGRICULTURAL MECHANIZATION IN ASIA (Vol. 9 no. 3, Summer, 1978)	
Preface (Yoshisuke Kishida).....	9
Intermediate Agricultural Mechanization in East Asian Countries (Merle L. Esmay).....	11
Farm Size, Labor Employment and Farm Mechanization in Bangladesh (Bilash Kanti Bala, A. H. M. Sakhawat Hussain).....	19
Economies and Diseconomies of Scale in Malaysian Agriculture (Raymond Crotty).....	24
Guidelines for Agricultural Mechanization in Northern Thailand (A. G. Rijk).....	33
Demand for and Marketing of Domestically Produced Small Farm Tractors in Thailand (Ungthip Chinpant).....	39
Japanese Small Tractor (Noboru Kawamura).....	46
Performance Studies of Country Ploughs in Bangladesh (Md. Daulat Hussain, Md. Rafiqul Islam Sarker).....	55
Design and Development of a Paddy Winnowing (A. P. Sharma).....	61
Development of a Single-Row Safflower Harvester (N. C. Shrivastava, F. B. Dyck).....	63
A Description of the Intergrated Rice-Processing Complex of the Kamol Kij Company, Ltd. in Thailand (Harry van Ruiten).....	66
Process Development and Testing of Ceramic Materials from Rice Husk-Ash (A. K. Goyal, R. C. Maheshwari, H. S. Maiti).....	69
Introduction of Decortication of Green jute Plants in Bangladesh and Its Prospect (M. A. Mazed, M. S. Rahman).....	73
Statistical Modelling of Tapioca Drying in Thailand (B. N. Lohani, N. C. Thanh).....	75
Engineering for Food Production in Developing Countries — Are Small Tractors Appropriate ? (R. T. Lewis).....	81
New Products.....	90
New Publications.....	92

CONTRIBUTORS WANTED

This publication, published quarterly, has an objective to promote agricultural mechanization in developing countries. Its readers consist of so many people in various fields such as farmers, dealers, manufacturers, researchers, government officials, students, etc. not only in Asia but also in the whole world. To enrich contents and to reflect many opinions, we want contributors for "Agricultural Mechanization in Asia". Articles, comments, investigations, reports and so on will be received with open arms. If you hope to contribute, contact us without delay.

FARM MACHINERY INDUSTRIAL RESEARCH CORP.

7-2 Kanda Nishikicho, Chiyoda-ku, Tokyo, Japan (Tel. 03/291-5717-8, 3671-4)

HASEBE is widely known as a manufacturing and a distributing company of cars, farm machinery, fixing tools and testing machines in the automotive and agricultural industry of Japan. Please give us information to establish a distributing network in your country and also inform us necessary machine tools, testing machine, whatever you need.



High Temperature Washer
Kinsen

Garage Jack

Silicon Quick Charger
Dengen High Rate



HASEBE CO., LTD.

HEAD OFFICE: 1-4-1 ATAGO MINATO-KU, TOKYO JAPAN

Is your Agricultural Machinery Industry faced with problems of development and growth?

We can provide you with know-how to help your company and industry develop and grow.

Specific Information Service.

Statistics, Product Information, Patents, Test & Research Data, References and Directory.

Survey & Research.

Marketing Research, Forecasting on Economic, Technical, Supply, Demand, etc. and Dealer Search.

System Development.

Design of Developing System on New Products: from Ideas to Marketing.

Consultation.

Policy Making, Management Improvement, New Development of Organizations, Motivation.

Seminars & Meeting.

New Project & Up-to-date Subjects.

Publication Activities.

Basic, Production and Sales Statistics for Agricultural Machinery, etc.

FARM MACHINERY INDUSTRIAL RESEARCH CORP.

7-2 Kanda Nishikicho, Chiyoda-ku, Tokyo, Japan (Tel. 03/291-5717-8, 3671-4)

**EIMA
BOLOGNA
9-13 NOVEMBRE 1978**

**BOLOGNA
9-13 NOVEMBRE 1978**

Admission by invitation :
8-9-10 November

Admission to public :
11-12 November

**international exhibition
of agricultural
machinery manufacturers**

**exhibition of
gardening machinery**

Organized by **PROMOZIONI UNACOMA S. p. A.**
with the collaboration of the ENTE AUTONOMO FIERE DI BOLOGNA

for further details :

eima

00161 ROMA-VIA L. SPALLANZANI 22/A
TEL. (06) 855787/858319/867550/869792-TELEGRAMMI (UNACOMA-ROMA)



NewsLetter

INTERNATIONAL FARM MECHANIZATION RESEARCH SERVICE

c/o SHINNORIN-SHA 2-7 KANDA NISHIKI-CHO CHIYODA-KU,
TOKYO, JAPAN., TEL. 03-291-5718, 3674

Dear friends

International Farm Mechanization Research Service was established in 1968 with the purpose of promoting effective communications and researches on agricultural mechanization especially in developing countries.

We will gladly welcome everybody to join us who want to promote free and vital communications on agricultural mechanization over many barriers like sectionalism.

Our body is really independent one supported by every member's free and active mind to make better world.


Whenever you need more informations, please write me!

Yours Sincerely
Yoshikuni Kishida
Head of Directors


FARM-PORTER

A SERIES OF OUR TRANSPORTERS ARE MOST SUITABLE FOR HAULING OVER BEACHES, SANDY OR DAMP GROUND, SLOPING ROADS, AND SNOWY SURFACES.

- FARM-PORTER runs smoothly.
The all-rubber caterpillars beat sand, mud, and many other troublesome conditions.
Slopes up to 40° declination present no problem, even when the FARM-PORTER is fully loaded.
- FARM-PORTER has the largest load carrying capacity in its class. 500kg (1,100 lb)
- FARM-PORTER is very well balanced.
The low center of gravity (height to platform: 500m/m (1ft 8in)) and wide caterpillars provide great stability.
- FARM-PORTER has multiple gear transmissions.
(Three forward and 1 reverse)
- FARM-PORTER Pivots on one spot.
It turns freely and compactly by switching off one of the two clutches to fully disengage one track on which it revolves.

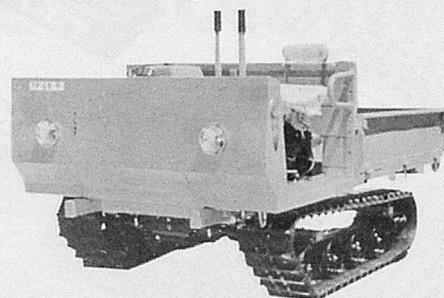

MODEL P6-121

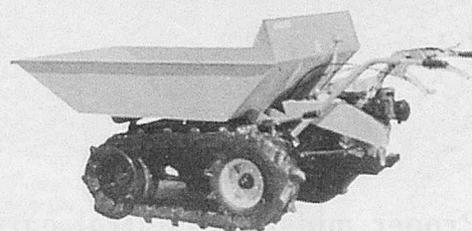

MODEL P9-600


SHIROISHI KOKI CO., LTD.

4-chome, Kita Hondori Shiroishi-ku, Sapporo-city, Hokkaido, Japan
Telephone: 011-861-7131




DRIVE HARROW


- Because of the unique shape of blades, puddling and clod breaking can be completely performed at a time.
 - The unique levelling equipment and soil moving system make fields even and smooth.
 - It is light enough to keep balance with a tractor even in muddy paddies and easy to handle.
 - It requires less power and can harrow widely. It is economical.
 - Blades can be easily replaced.
 - Model HZ-240LA can be folded both sides by 45 centimeters.
 - It produces a fine upper layer and rough lower layer, the ideal soil condition for rice planting.
- The universal joint is a standard attachment.

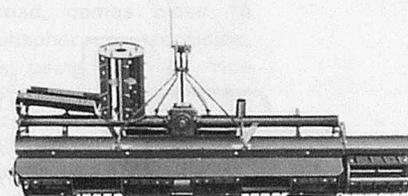

Model HZ-240LA

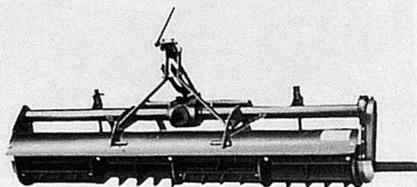

Model HY-201

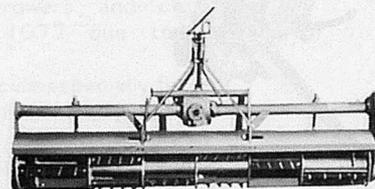

Model HD-20A

Models	Dimensions (L×W×H)	Weight	Harrowing Width	PS of Tractor required	Rotor R.P.M (PTO540)	3point linkage	Working Speed	Capacity
HY-201	618×2137×952mm	199kg	2000mm	15-25ps	211rpm	Cat. 0.1	2.0-3.0km/h	30-50a/h
HD-20A	950×2400×1160mm	280kg	2300mm	25-35ps	248rpm	Cat. 1	2.5-5.0km/h	40-90a/h
HZ-240LA	950×3220×950mm	450kg	3200mm	above35ps	275rpm	Cat. 1.2	2.5-5.0km/h	50-130a/h

MATSUYAMA PLOW MFG. CO., LTD.

2949, Shiokawa, Maruko-machi, Nagano-ken, 386-01 Japan

Kett
MOISTURE METER OF THE WORLD



Proper moisture control earns large profits!

GRAIN MOISTURE METER RICETER MODEL 3

Kett Electric Laboratory

COMPUTERIZED GRAIN MOISTURE METER, RICETER MODEL 3 is an instrument to measure the percentage of moisture content of products. It has been sold more than 300,000 so far in Japan and officially adopted by the Japanese Food Agency. Riceter Model 3 has been also sold thousands in Southeast Asia including Burma·Taiwan·Thailand·Philippine and Indonesia.

The Kett Electric Laboratory is an unique manufacturer in the world which has studied and sold the Moisture Meter through thirty years.


- MOISTURE METERS FOR.....
GRAIN·WOOD·PAPER·MORTER
FOOD·FIBER·PULP·etc.
- THICKNESS METERS FOR.....
COATING·PLATING·PAPER·FILM
LINING·etc.



Kett Electric Laboratory

Head Office
8-1, 1-chome, Minami-Magome, Ota-ku, Tokyo, Japan
Cable address: KETTKAGAKU TOKYO
Branch Office
Osaka, Nagoya, Sapporo, Hiroshima

The Most Safety, Economical & Durable

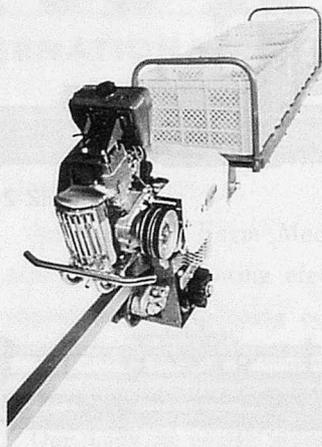

We get highest appraisal in the world as a pioneer of MONORAIL.

Not to mention, we get a large share in the market. Recently MONORAIL has been developed to use on a slope for a tractor. It gained high popularity and is using in every part of agriculture.

■ SEIKO-MONORAIL MR-7

Applying the technique, we have also developed Vegetable Harvesting Carrier. It is booming among Japanese vegetable farmers as not only a harvesting but also selecting and packing machine.



■ SEIKO VEGETABLE HARVESTING CARRIER, MIDORI



KYODO SEIKO CO., LTD.

2059, Miyoshi, Okayama City, Okayama Pref., 700 TEL 0862-77-9505

SUMITHION
SUMICIDIN

SUMISCLEX
Neo-Pynamin

SUMITHION & SUMICIDIN

TO CONTRIBUTE to World
Food Production and Improve
World Environmental Hygiene



SUMITOMO CHEMICAL offers
you a variety of potent and
safe pesticides.

SUMITHION, now well accepted at home and abroad, comes close to being a universal insecticide. SUMITHION, an organophosphorous insecticide, is murderous on insects but safe for men and animals, being used by rice farmers, fruit and vegetable growers and tea and coffee planters all over the world. SUMICIDIN, is also used to control vectors of communicable diseases such as mosquitoes, houseflies, bedbugs, lice and fleas.

SUMITHION and SUMISCLEX are the latest additions to Sumitomo's line of business, which signify the advent of a new pesticide era.

SUMICIDIN is a pyrethroid-like insecticide, quite powerful with appropriate duration of residual effect and stable in sunlight. SUMICIDIN has made a great sensation especially among vegetable growers and cotton cultivators in the world since its commercialization in 1977 due to the increase of yield and prolonged spray intervals.

SUMISCLEX came into being in 1977 as a fungicide especially for the control of Botrytis on grapes. SUMISCLEX is very effective to grape Botrytis Disease resistant to the conventional fungicides.

Sumitomo also offer you some pyrethroids for household use, among which is NEO-PYNAMIN. Aerosolers are completely satisfied with the quick knockdown effect of NEO-PYNAMIN against houseflies, mosquitoes and other household insects. It offers the same advantage as pyrethrins: extremely low toxic to men and animals.

For further information write: Pesticides Division.





SUMITOMO CHEMICAL CO., LTD.

15, 5-chome, Kitahama, Higashi-ku, Osaka, Japan.
Cable Address: CHEMISUMIT OSAKA


MAMETORA DEDICATES TO AGRICULTURE

It is the motto of MAMETORA that we manufacture goods in order to meet customer's benefits with originality, trusty and hearty. In addition to the head office in Okegawa, Kisakata Factory has been established. Now that we have formed the much steadier basis as a comprehensive manufacturer. We are always making efforts to manufacture goods of high quality and are pleased to devote ourselves to the food industry in the world as well as that in Japan.


RICE-TRANSPLANTER FOR
MATURE SEEDLING (4 ROWS)

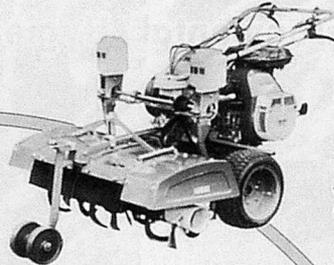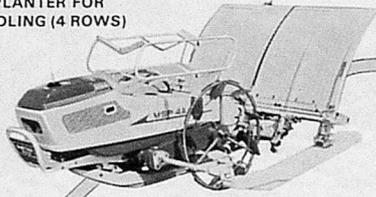

WHEAT AND SOYBEAN
SEEDER

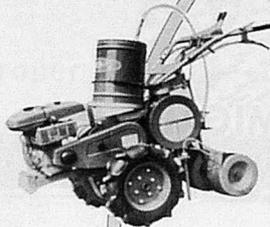


SOIL-INJECTOR

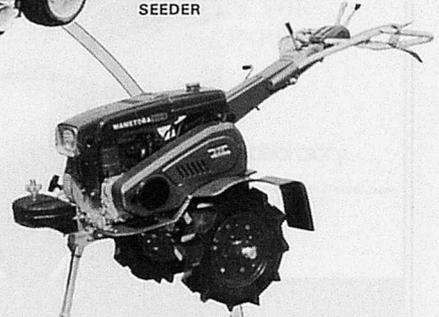


UTILITY TILLER SKD-III




MAMETORA

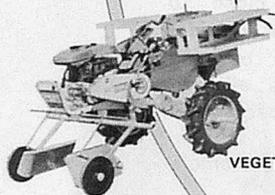


VEGETABLE TRANSPLANTER

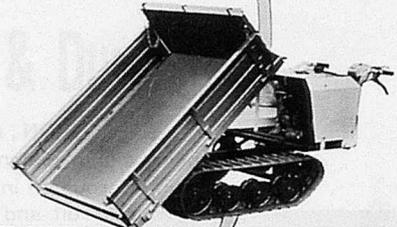

CRAWLER CART SC-6
(SIMPLE TRANSPORT VEHICLE)

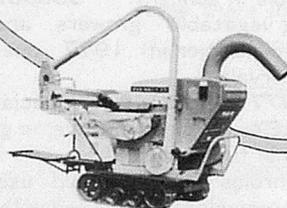

DIESEL HARVESTER

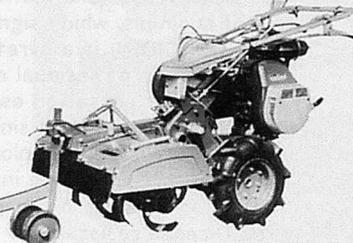


RETURN-CULTI V4

MAMETORA AGRIC. MACHINERY CO., LTD.

HEAD OFFICE ADD : 9-37, NISHI-2 CHOME, OKEGAWA-SHI, SAITAMA-KEN, JAPAN.

TELEPHONE : 0487-71-1181 TELEX : 2922561 MAMETO-J

CULTURE ALL OVER THE WORLD

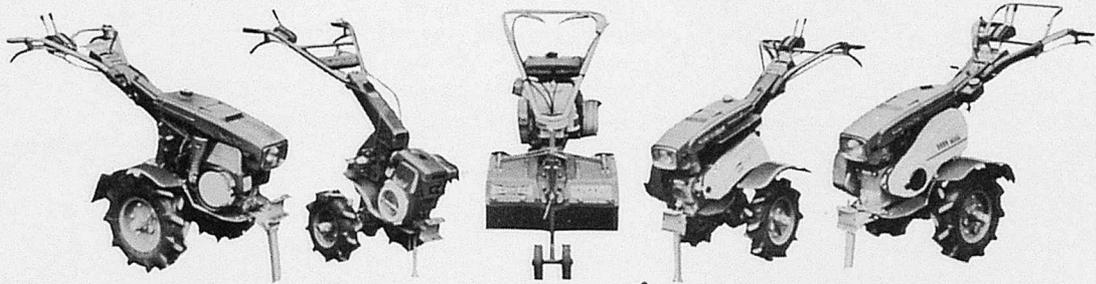

PM-350

DMC-II


MRV3

SKD-II


HMD-250

We are provided other Japanese manufacturerd
We believe you can find the satisfaction with
We have not only the tiller but also the


with the transmission only.
MAMETORA AGRICULTURAL MACHINERY.
transmission under oder.

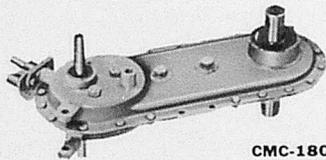


CMC-180

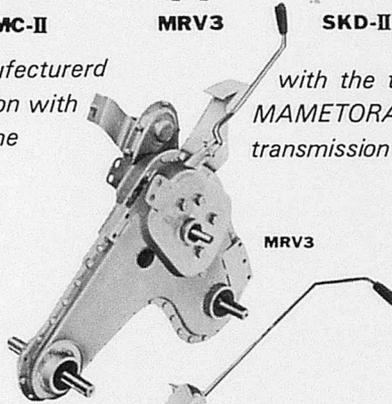


MRV3

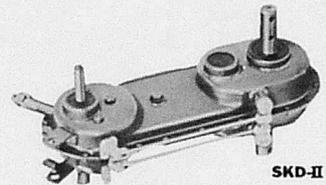


SKD-II

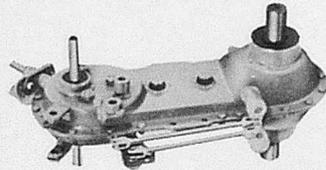


DMC-180

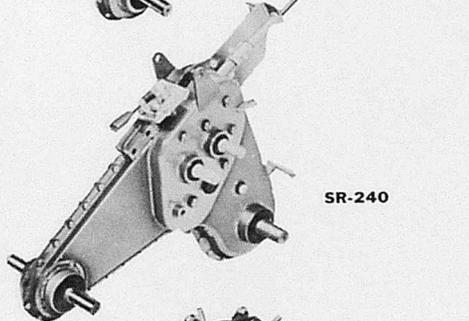


SR-240

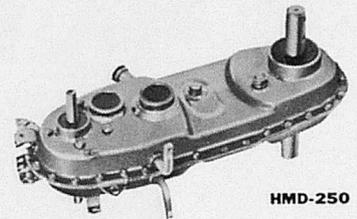


HMD-250

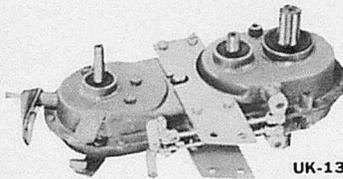

UK-13

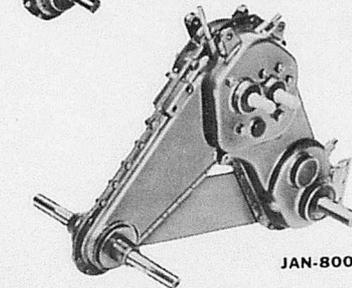

JAN-800

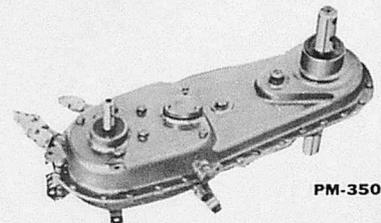

PM-350

Model	MC-80	MCF-130K	CMC-180	DMC-180	DMC-II	SKD-I 8	SKD-II	SKD-III	HMD-250	PM-350	UK-13	MH-750	MT-40
Applications (PS)	1.8~2.5	2.0~3.5	3.0~4.5	3.0~4.5	3.0~4.5	3.0~4.5	4.5~6.0	4.5~6.0	5.0~7.0	6.0~8.0	3.0~4.5	3.0~4.5	3.0~4.5
Shifting Stages	F1	F1, R1	F2, R1	F2, R1	F3, R1	F2, R1	F2, R1	F3, R1	F4, R2	F6, R2	F2, R1	F1, R2	F1, R2
Sideclutch	—	—	—	—	○	○	○	○	○	○	○	○	○ with Lock
Gear Ratios	F ₁ =1:21.71	F ₁ =1:18.16	F ₁ =1:25.41	F ₁ =1:25.41	F ₁ =1:41.31	F ₁ =1:21.21	F ₁ =1:31.06	F ₁ =1:66.07	F ₁ =1:70.03	F ₁ =1:53.97	F ₁ =1:32.13	F ₁ =1:25.54	F ₁ =1:37.62
	R ₁ =1:27.24	F ₂ =1:15.38	F ₂ =1:15.38	F ₂ =1:15.38	F ₂ =1:19.40	F ₂ =1:10.28	F ₂ =1:11.34	F ₂ =1:18.96	F ₂ =1:38.73	F ₂ =1:37.41	F ₂ =1:16.92	R ₂ =1:29.37	R ₁ =1:32.83
		R ₁ =1:35.58	R ₁ =1:35.58	R ₁ =1:35.58	F ₃ =1: 9.35	R ₁ =1:21.33	F ₁ =1:44.52	F ₃ =1:11.43	F ₃ =1:15.81	F ₃ =1:18.50	R ₁ =1:32.77	R ₁ =1:20.22	R ₂ =1:10.69
					R ₁ =1:49.91			R ₁ =1:81.09	F ₄ =1: 8.74	F ₄ =1:19.42			
								R ₁ 1:105.04	F ₅ =1:13.47				
								R ₂ 1:23.71	F ₅ =1: 6.66				
									R ₁ =1:66.67				
									R ₂ =1:24.0				
Dimensions	A	170	170	170	170	202	192	192	224	234	243.5	192	192
	B	434	434	434	435.5	532	492	492	545	578.5	603.3	467	467
	C	289.5	289.5	289.5	289.5	344.7	336.75	336.75	336.75	319.7	402.5	409.9	287
	D	15	15	15	15	16	16	17	19	19	19	16	16
	E	31	31	31	31	31	31	31	31	34.5	34.5	31	31

